



Product Specifications

SCPV – TEMPEST Pluggable Filter 32A4SRM For 19" Rack

Why choose this product?

Silicon CPV's 12 sockets, TEMPEST pluggable filter has been designed for use within stringent TEMPEST environments and applications, where protection compliant to SDIP-29 and equipment hardening to SDIP-27 is required.

The product uses ultra-reliable self-healing capacitors, in all units to deliver optimum performance across the full frequency range and under all loading conditions.

Product Description

TEMPEST EMI SP & N filter providing performance to SDIP-27 B/C
Insertion loss of 60dB from 100kHz to 1GHz

2m, 3 core shielded flex cable, 4 x BS1363 sockets

Designed to IT equipment safety standard IEC 62368-1:2023

Fully 360° screened input cable to maintain red/black separation to filter

Low Smoke Zero Halogen (LSZH) rated cabling for use in sensitive areas

Self-healing metallised plastic film capacitors

High common & differential mode insertion loss

Improved low frequency performance

Powder coated aluminium enclosure

32A designed filters are tolerable for personnel protection RCCD


UKCA - CE compliant - Input voltage range (90-275VAC)

Simple mechanical and electrical installation

Filters comply with basic requirements of the EMC directive 2014/30/EU

19" Rack Mountable Filter



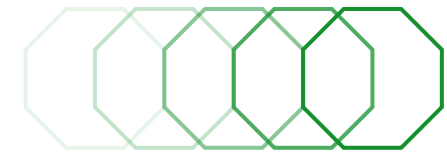

Product Specifications

SCPV – TEMPEST Pluggable Filter 32A4SRM For 19" Rack

Part Number

SCPVTEMPEST32A4SRM

CP&F Part No: **SCPVTEMPEST32A4SRM**

Product Description

19" Rack Mount Filter, 4 x BS1363 Sockets, Maximum 32A Single Phase

230V Pluggable Tempest Filter

Rating and Characteristics

Rated Voltage	230V AC 50/60Hz
Test Voltage (line- earth)	2250V DC
Test Voltage (line-Line)	1250V DC
Rated Current @50°C	32A
Earth Leakage Current	Less than 3.0mA
Max Temp Rise @Full Load	<35°C
Storage Temp Range	-25°C to 85°C
Operating Temp Range	20°C to 50°C
Insertion Loss (50Ω Asymmetric)	60dB, 100KHz - 1GHz
Discharge Time	Less than 1s to below 34V
Enclosure	Extruded Aluminium
Finish	Powder coated

