


TEMPEST FILTER

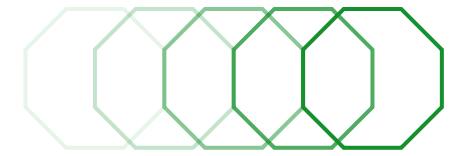

Pluggable 8 Socket 16A 19" Rack (C19)

Silicon CPV's 8 sockets, TEMPEST pluggable filter has been designed for use within stringent TEMPEST environments and applications, where protection compliant to SDIP-29 and equipment hardening to SDIP-27 is required.

The product uses ultra-reliable self-healing capacitors, in all units to deliver optimum performance across the full frequency range and under all loading conditions.

Product Description

TEMPEST EMI SP & N filter providing performance to SDIP-27 B/C
Insertion loss of 60dB from 100kHz to 1GHz

5m, 3 core shielded flex cable, 8 x 16A C19 sockets

Designed to IT equipment safety standard IEC 62368-1:2023

Fully 360° screened input cable to maintain red/black separation to filter

Low Smoke Zero Halogen (LSZH) rated cabling for use in sensitive areas

Self-healing metallised plastic film capacitors

High common & differential mode insertion loss

Improved low frequency performance

Powder coated aluminium enclosure

16A designed filters are tolerable for personnel protection RCCD

UKCA - CE compliant - Input voltage range (90-275VAC)

Simple mechanical and electrical installation

Filters comply with basic requirements of the EMC directive 2014/30/EU

19" Rack Mountable Filter



TEMPEST FILTER

Pluggable 8 Socket 16A 19" Rack (C19)

Part Number	Product Description
SCPVTEMPEST16A8C19-5	19" Rack Mount Filter, 8 x C19 Sockets with 5 meter cable, Maximum 16A Single Phase
CP&F Part No: SCPVTEMPEST16A8C19-5	230V Pluggable Tempest Filter

Rating and Characteristics

Rated Voltage	230V AC 50/60Hz
Test Voltage (line- earth)	2250V DC
Test Voltage (line-Line)	1250V DC
Rated Current @50°C	16A
Earth Leakage Current	Less than 3.0mA
Max Temp Rise @Full Load	<35°C
Storage Temp Range	-30°C to +85°C
Operating Temp Range	-20°C to +50°C -35°C to +85°C for 20 minutes
Insertion Loss (50Ω Asymmetric)	60dB, 100KHz - 1GHz
Discharge Time	Less than 1s to below 34V
Enclosure	Extruded Aluminium
Finish	Powder coated

