



Dragontail Optics Static White (Indoor/Outdoor)

FLEXIBLE WASHER/GRAZER FIXTURE



SPECIFICATIONS

Output Options	600lm/ft			
Watts per Foot	7.62W/ft			
Max Run Length	16.4ft			
Light Color (CCT)	2700K	3000K	3500K	4000K
Color Rendering	90+ CRI			
Beam Spread	10°, 20°, 30°, 50°, 25° × 50°			
Mounting	Clip, Aluminum Channel			
Finish	White Jacket, Dark-Gray Jacket			
Input Voltage	24VDC (Power Supply: 120VAC - 277VAC)			
Dimming	TRIAC, ELV, 0-10V, DMX, DALI, Bluetooth			
Dimensions	1.34" (34mm) × 0.98" (25mm)			
Production Interval	9.84" (250mm)			
Operating Temperature	-4°F (-20°C) to 113°F (45°C)			

PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____




Dragontail Optics Static White (Indoor/Outdoor)

FLEXIBLE WASHER/GRAZER




DIMENSIONS

Side Feed

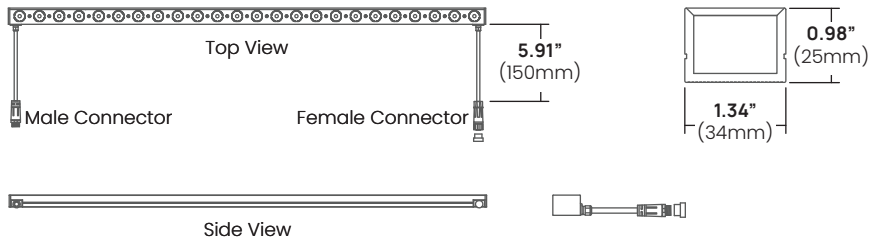


Back Feed

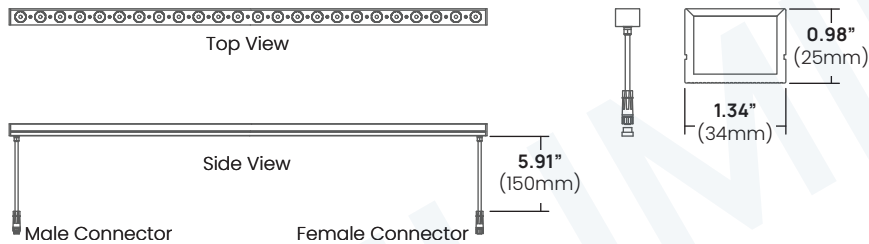


BEND DIAMETER

Side Bend



Top Bend



PROJECT NAME _____

FIXTURE TYPE _____

LOCATION _____




Dragontail Optics Static White (Indoor/Outdoor)

FLEXIBLE WASHER/GRAZER




ACCESSORIES DIMENSIONS

Mounting Clip



Aluminum Channel



Part Number:

ACC-DT-MC _____

BK — Black
WH — White

Part Number:

ACC-DT-CH- _____ -2M

BK — Black
WH — White

PROJECT NAME _____

FIXTURE TYPE _____

LOCATION _____



Dragontail Optics Static White (Indoor/Outdoor)

FLEXIBLE WASHER/GRAZER



PART NUMBER EXAMPLE

OPT-DT-SW - I - 27K - 590 - 10 - MC - WH - 50" - E2 - C
+
PS - UNIV - 24V - 100W - JBOX

PART NUMBER BUILDER

SERIES	DRY/WET	CCT	OUTPUT	BEAM ANGLE	FINISH
OPT-DT-SW	O		600		
ilLuminate Dragontail Optics Static White	O — Outdoor	27K — 2700K 30K — 3000K 35K — 3500K 40K — 4000K	600 — 600lm/ft	10 — 10° 20 — 20° 30 — 30° 50 — 50° AA — 25° × 50°	WH — White GR — Dark-Gray
LENGTH (IN)	DIRECTION	START FEED LENGTH	END FEED LENGTH	DIRECTION	END FEED LENGTH
Fixtures will be built as close to the requested length without going over based on 9.84 (250mm) production interval.	S — Side B — Back	150 — 5.9in (150mm)		S — Side B — Back C — Endcap	Blank — Endcap 150 — 5.9in (150mm)

POWER SUPPLY

SERIES	CONTROL	VOLTAGE OUTPUT	MAX WATTAGE OUTPUT	FORM
PS		24V		
ilLuminate AC to DC Constant Voltage Power Supply	UNIV — Universal 5-in-1 DMX — DMX512 Enabled DALI — DALI-2 Enabled BLE — Bluetooth Enabled	24V — 24VDC	30W — 30W 60W — 60W 100W — 100W 200W — 100W × 2 300W — 100W × 3	JBOX — Dry/Damp Rated IP66 — Wet Rated

PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____