


Lago Static White (Indoor/Outdoor)





LINEAR WASHER/GRAZER FIXTURE

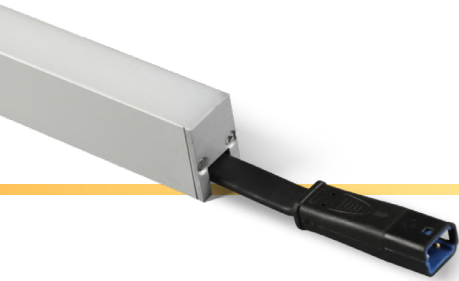

SPECIFICATIONS

Estimated Delivered Outputs	400lm/ft	650lm/ft	750lm/ft	850lm/ft	750lm/ft
Beam Spread	120°	15°	30°	45°	60°
Watts per Foot	8W/ft				
Max Run Length	10ft				
Light Color (CCT)	2700K	3000K	3500K	4000K	
Color Rendering	90+ CRI				
Mounting	Mounting Clip, Pivot Clip, Glare Shield, Pivot Glare Shield, Surface Mounting Channel, In-Ground Mounting Channel				
Finish	Anodized Silver				
Input Voltage	24VDC (Power Supply: 120VAC - 277VAC)				
Dimming	TRIAC, ELV, 0-10V, DMX, DALI, Bluetooth				
Dimensions	0.7" (18mm) × 1.06" (27mm)				
Production Interval	6.00" (152mm)				
Operating Temperature	-4°F (-20°C) to 113°F (45°C)				


DIMENSIONS

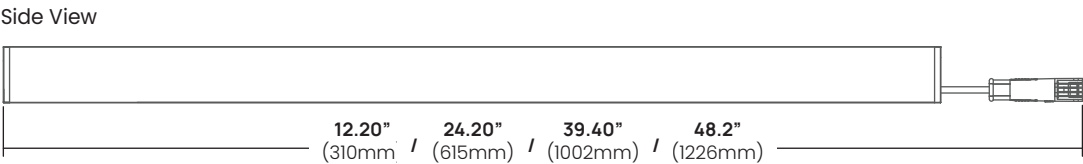

PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____


Lago Static White (Indoor/Outdoor)

LINEAR WASHER/GRAZER FIXTURE

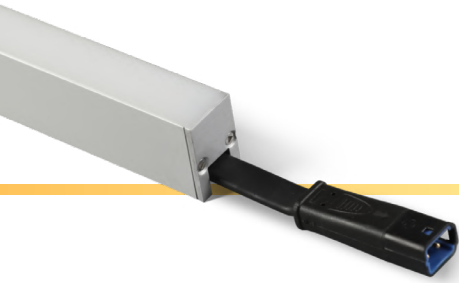

ACCESSORIES DIMENSIONS


Metal Mounting Clip

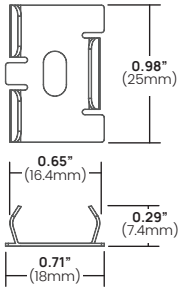

Part Number:

ACC-LGO-MC


Metal Pivot Clip

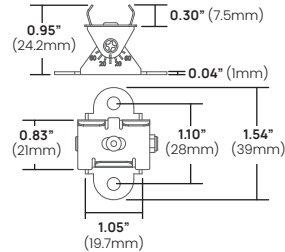

Part Number:

ACC-LGO-PV


Metal Glare Shield

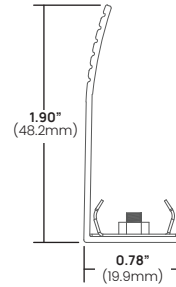

Part Number:

ACC-LGO-GS-MC


Pivot Metal Glare Shield

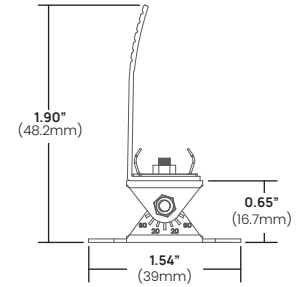

Part Number:

ACC-LGO-GS-PV

Metal Mounting Channel

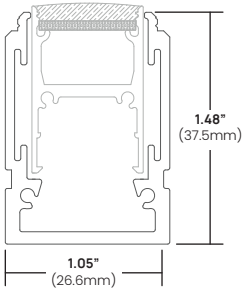


Part Number:

ACC-LGO-CH

12 — 12.4 in
24 — 24.4 in
36 — 39.6 in
48 — 48.5 in

In-Ground Metal Mounting Channel

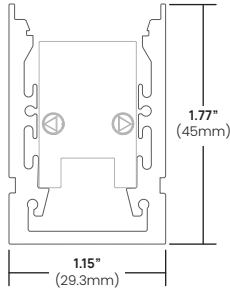

Part Number:

ACC-LGO-IG

12 — 12.4 in
24 — 24.4 in
36 — 39.6 in
48 — 48.5 in


PROJECT NAME _____

FIXTURE TYPE _____

LOCATION _____

Lago Static White (Indoor/Outdoor)

LINEAR WASHER/GRAZER FIXTURE

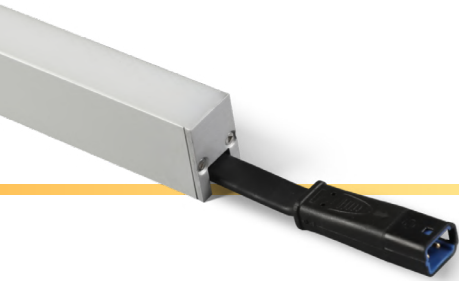

POWER FEEDS

Lead

Red
Black

0.43" (11mm)

1.77" (45mm)

19.68" (500mm) / 39.37" (1000mm)

Rubber flat wire in black jacket

2.36" (60mm) stripping with 0.20" (5mm) end

Part Number:

ACC-LGO-PWR-2C-FML-

1 – 1ft
6 – 6ft

Cable

6.00" (152.4mm)

1.89" (48mm)

Red
Black

Part Number:

ACC-LGO-PWR-2C-FMC-6

ENDCAP

1.24" (31.5mm)

0.55" (14mm)

Red
Black


Part Number:

ACC-LGO-2C-EC

PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____

Lago Static White (Indoor/Outdoor)

LINEAR WASHER/GRAZER FIXTURE

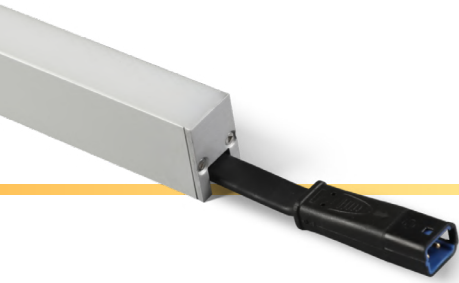

PART NUMBER EXAMPLE

LIN-LGO-SW - O - 27K - 500 - 15 - SV - 1
+
PS - UNIV - 24V - 100W - JBOX

PART NUMBER BUILDER

SERIES	DRY/WET	CCT	OUTPUT	BEAM ANGLE	FINISH	LENGTH
LIN-LGO-SW	O		500			
ilLuminate Lago Static White	O – Outdoor	27K – 2700K 30K – 3000K 35K – 3500K 40K – 4000K	500 – 500lm/ft	WH – 120° 15 – 15° 30 – 30° 45 – 45° 60 – 60°	SV – Anodized Silver	1 – 12.2 in 2 – 24.2 in 3 – 39.4 in 4 – 48.2 in

POWER SUPPLY

SERIES	CONTROL	VOLTAGE OUTPUT	MAX WATTAGE OUTPUT	FORM
PS		24V		
ilLuminate AC to DC Constant Voltage Power Supply	UNIV – Universal 5-in-1 DMX – DMX512 Enabled DALI – DALI-2 Enabled BLE – Bluetooth Enabled	24V – 24VDC	30W – 30W 60W – 60W 100W – 100W 200W – 100W × 2 300W – 100W × 3	JBOX – Dry/Damp Rated IP66 – Wet Rated

PROJECT NAME _____ FIXTURE TYPE _____ LOCATION _____