


SKYJACK SJ45 AJ PLUS

ARTICULATING BOOM LIFT

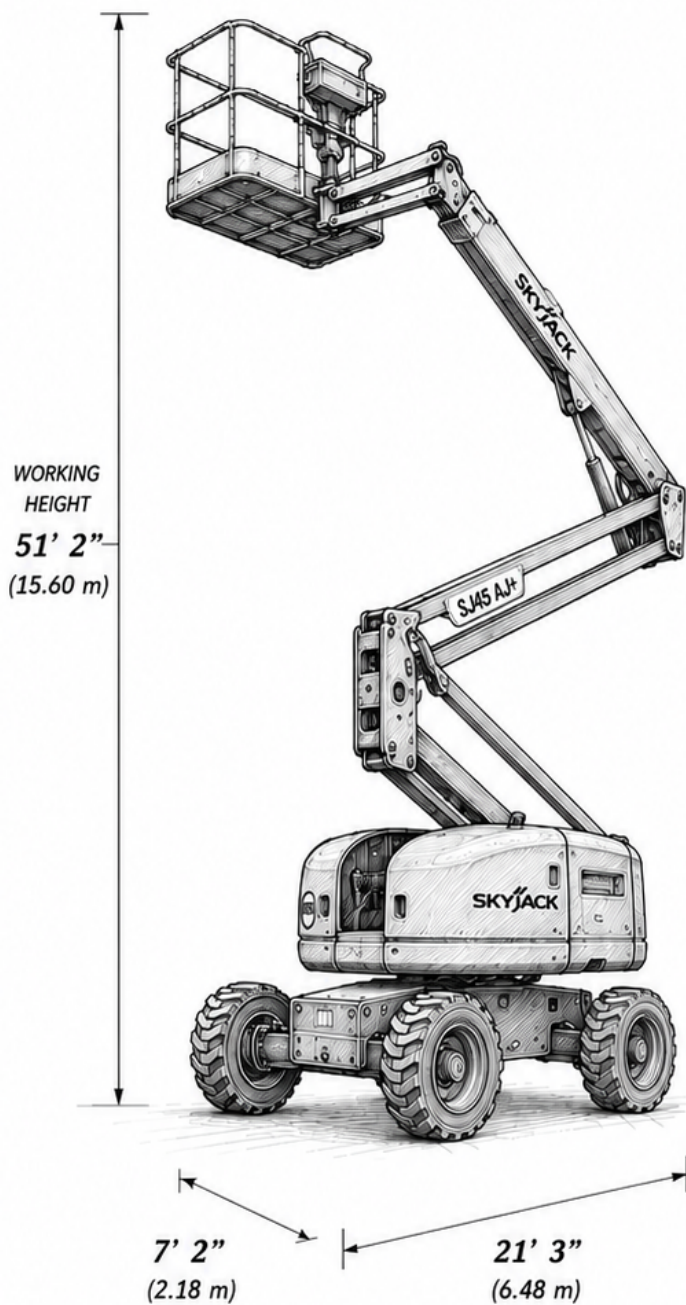

SPECIFICATIONS

Working Height	51 ft 2 in (15.60 m)
Platform Height	45 ft 2 in (13.77 m)
Horizontal Outreach	25 ft 6 in (7.77 m)
Up and Over Height	23 ft (7.01 m)
Platform Capacity	500 lb (227 kg)
Platform Size (Std.)	30 x 66 in (0.76 x 1.68 m)
Jib Length	5 ft (1.52 m)
Jib Range of Articulation	130° (+70° / -60°)
Turntable Rotation	355° Non-Continuous
Overall Width (Axles Retracted)	7 ft 2 in (2.18 m)
Overall Length (Stowed)	21 ft 3 in (6.48 m)
Stowed Height	6 ft 7 in (2.01 m)
Ground Clearance	13 in (33 cm)
Wheelbase	6 ft 7 in (2.01 m)
Drive Speed (Stowed)	3.4 mph (5.5 km/h)
Drive Speed (Raised)	0.7 mph (1.1 km/h)
Gradeability	45%
Turning Radius (Inside)	7 ft (2.13 m)
Turning Radius (Outside)	15 ft 6 in (4.72 m)
Power Source	24V DC (Four 6V Batteries)
Tires	12 x 16.5 in Foam-Filled Rough Terrain

BEST FOR

- Construction
- Facility Maintenance
- Industrial Applications
- Warehouse & Distribution
- Outdoor Work at Height



Proportional Controls



355° Non-Continuous Rotation



Four-Wheel Drive



Rough Terrain Capability



Zero Emissions



844-935-3960



stackequipment.com



Now serving
WI - FL - TX - NC

Specifications are provided for reference only and may vary by serial number, year, or manufacturer updates.

JLG®, Genie®, Skyjack®, and MEC® are trademarks of their respective owners. Stack Equipment is not affiliated with or endorsed by these manufacturers.