


JLG M600JP

ARTICULATING BOOM LIFT

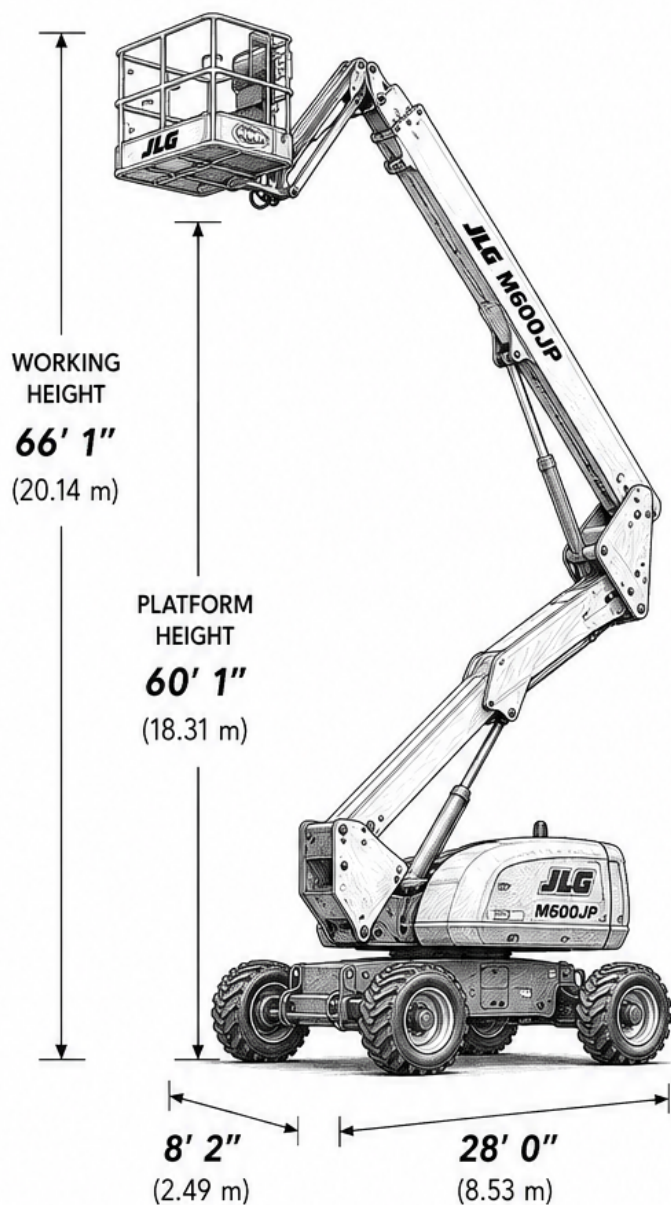

SPECIFICATIONS	
Working Height	66 ft 1 in (20.14 m)
Platform Height	60 ft 1 in (18.31 m)
Platform Capacity (Unrestricted)	600 lb (272 kg)
Horizontal Outreach	41 ft 6 in (12.65 m)
Up & Over Clearance	26 ft 3 in (8.00 m)
Swing	360° Continuous
Jib Articulation	135° (+75° / -60°)
Gradeability (4WD)	45%
Drive Speed	4.0 mph (6.4 km/h)
Overall Width	8 ft 2 in (2.49 m)
Overall Length (Stowed)	28 ft 0 in (8.53 m)
Stowed Height	8 ft 7 in (2.62 m)
Machine Weight	24,250 lb (11,000 kg)
Power Source	Diesel or Dual Fuel (varies by unit)
Tires	Foam-Filled Rough Terrain

BEST FOR

- Commercial Construction
- Steel Erection
- Industrial Maintenance
- Plant & Refinery Work
- Stadium & Arena Projects
- Exterior Building Maintenance

-  4WD Rough Terrain
-  135° Jib Articulation
-  360° Continuous Swing
-  41' 6" Horizontal Outreach

 844-935-3960



stackequipment.com



Now Serving
WI - FL - TX - NC

Specifications are provided for reference only and may vary by serial number, year, or manufacturer updates.

JLG®, Genie®, Skyjack®, and MEC® are trademarks of their respective owners.

Stack Equipment is not affiliated with or endorsed by these manufacturers.