


## Product Specification

Dimensions	
Weight	1000 g
Height/Width/Depth	32 x 262 x 125 mm
Interfaces	
Camera inputs	8
IPVI 08-001 per VDR	1
Electrical	
Power supply	AC (110-230V, 50-60Hz) IEC 60945 nominal
Power consumption	12-24VDC IEC 60945 nominal, 18W. 110-230VAC IEC 60945 nominal, 20W.
Environmental	
Approval	IEC 60945
Operating temperature	-15-55°C (Non-condensing)
Performance	
External storage support	Yes
Min. recording time	4 days (HD, 25 frames/sec)
Max. recording time with NAS	120 days (HD, 25 frames/sec)
Special features	
IP Video recordings correlated with mandated data in the Danelec VDR	
Connect to any ONVIF (profile R or S) compliant IP camera	
Plug & Play installation	
Fully configurable timespan - view what is needed	
Still images captured in VDR	
Expandable storage for longer storage of synchronized recordings	

The VDR IP Video Interface is a natural extension of the optional interfaces to the Danelec VDR. The recorded stills are part of the ship-2-shore remotely accessible services and thus reduce the urgency to go onboard or have crew assistance.

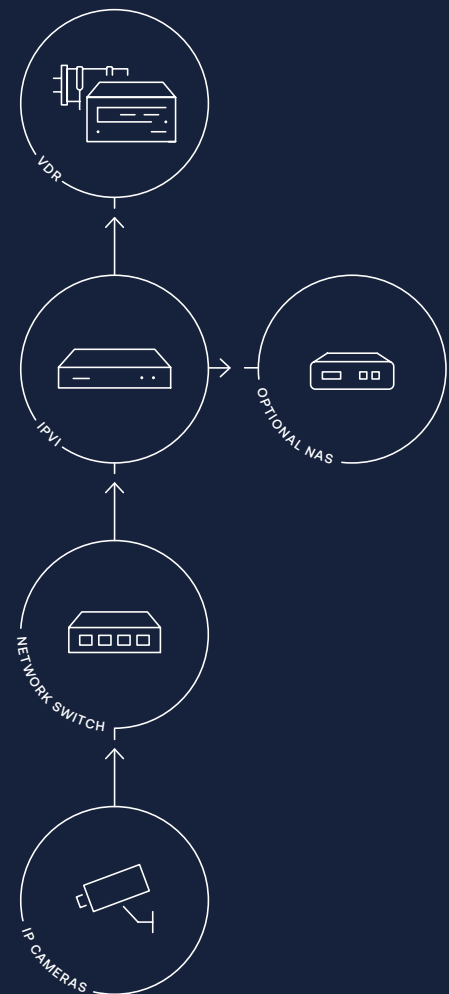

## There is always a service tech near your ship

Our extensive global network of service centers carry spare parts and provide service repairs 24/7 with 1.000+ factory-certified technicians in 50+ countries.