



Fountain Pre-Chiller

Specification Sheet



Features

Ease of Use

A sensible alternative to back-of-house recirculating chillers where ABS is deployed

Upgrade Existing Equipment

Integrates with ABS 1.0 and ABS 2.0 to provide enhanced chilling capacity

Additional Capabilities

Works seamlessly with the ABS and can supply other chilling needs



Extended Ice Capacity

Reduces chilling requirements of the ABS cold plate



Fountain Pre-Chiller

Specification Sheet

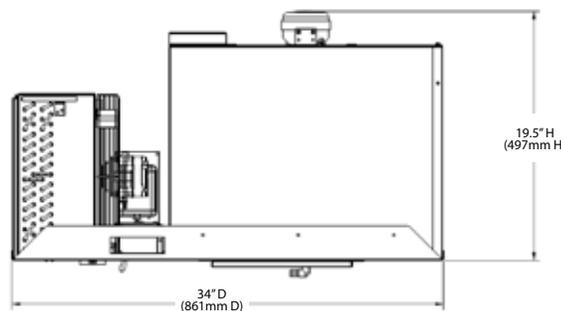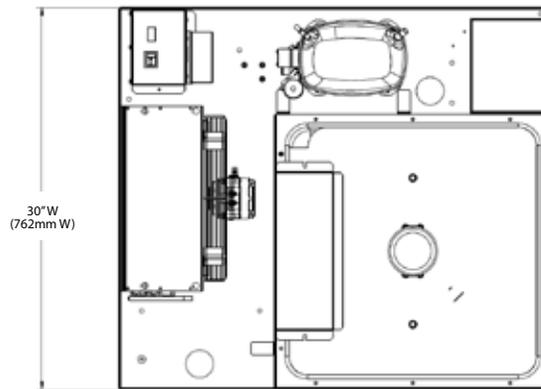

Technical Specifications

Market	US/Canada
Part Number	620073775
Volts	120V
Hz	60Hz
Agitator Motor	15W
Condenser Fan Motor	30W
Compressor	R290 1HP
Ice Bank Control	EIBC
Tank Size	19.5" H x 30" W x 34" D (497mm H x 762mm W x 861mm D)
Ice Bank Size	25kg (55lb)
Fittings Inlet water	3/8" (9.5mm) Barbed
Shipping Weight	189lbs (85.7kg)
Agency Listing	GAS-FIRED  

Market	International
Part Number	620073774
Volts	230V
Hz	50Hz
Agitator Motor	15W
Condenser Fan Motor	30W
Compressor	R290 1HP
Ice Bank Control	EIBC
Tank Size	19.5" H x 30" W x 34" D (497mm H x 762mm W x 861mm D)
Ice Bank Size	25kg (55lb)
Fittings Inlet water	3/8" (9.5mm) Barbed
Shipping Weight	189lbs (85.7kg)
Agency Listing	 

Part Number	Description
620073775	Pre-Chiller, 120V, 60Hz, R290
620073774	Pre-Chiller, 230V, 50Hz, R290

To learn more about the **Cornelius Pre-Chiller**, visit cornelius.com