

INSTALLATION INSTRUCTIONS

DF/ED ICEMAKER ADAPTER KIT FOR HOSHIZAKI F-1001, MANITOWOC SN SERIES, SCOTSMAN NME954 AND 1254 ICEMAKERS

 **WARNING:**

Disconnect power to the unit before installing the adaptor following all lockout/tag out procedures established by the user. Verify that all the power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.

 **WARNING:**

All ice baffle plates and bin stats, if included or recommended in this kit, must be installed as directed in this manual or the equipment manufacturer's instructions.

Failure to comply could result in serious injury, death or damage to the equipment.

 **WARNING:**

All of the attachment screws and plates must be installed as directed in this manual.

Failure to comply could result in serious injury, death or damage to the equipment.

Perform the following procedure to install the adapter kit.

1. Remove the plastic hopper lids from the top of the dispenser.
2. Install soft ice agitator kit (*sold separately*) into the dispenser.

NOTE: This soft ice agitator kit is required for proper dispenser operation using “compressed” or “soft” ice types. Failure to install this kit may result in undesirable beverage quality.

3. Unpack the adapter kit, Figure 1.


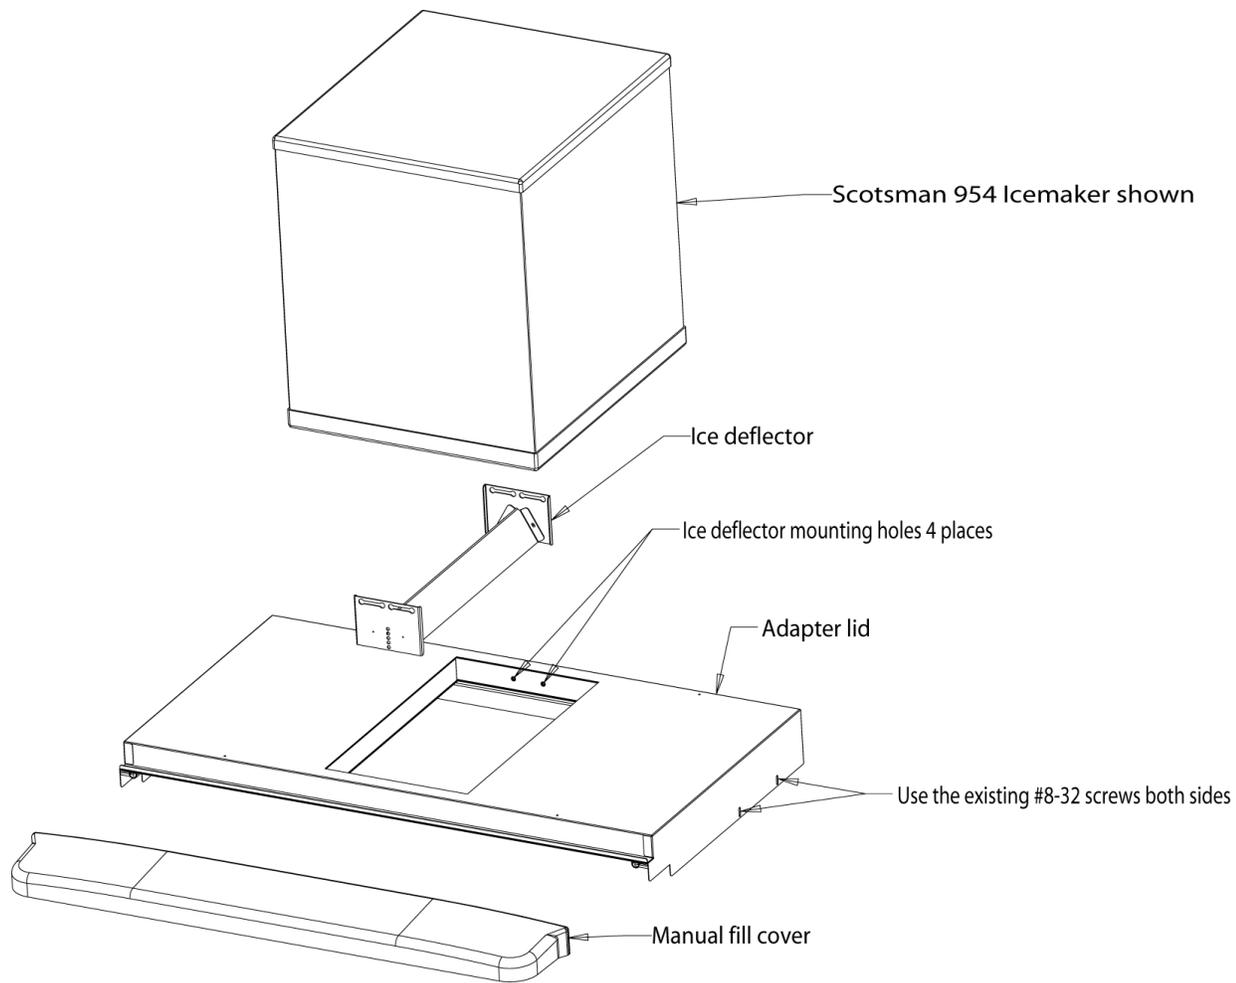


Figure 1.

4. Fasten lid to the dispenser with (4) #8-32 machine screws, (two on each side).
5. Install ice deflector in adapter opening using four #8-32 screws, see Figure 1. Do not completely tighten screws at this time.
6. Set ice maker onto the adapter kit. See Figure 2 for typical installation.

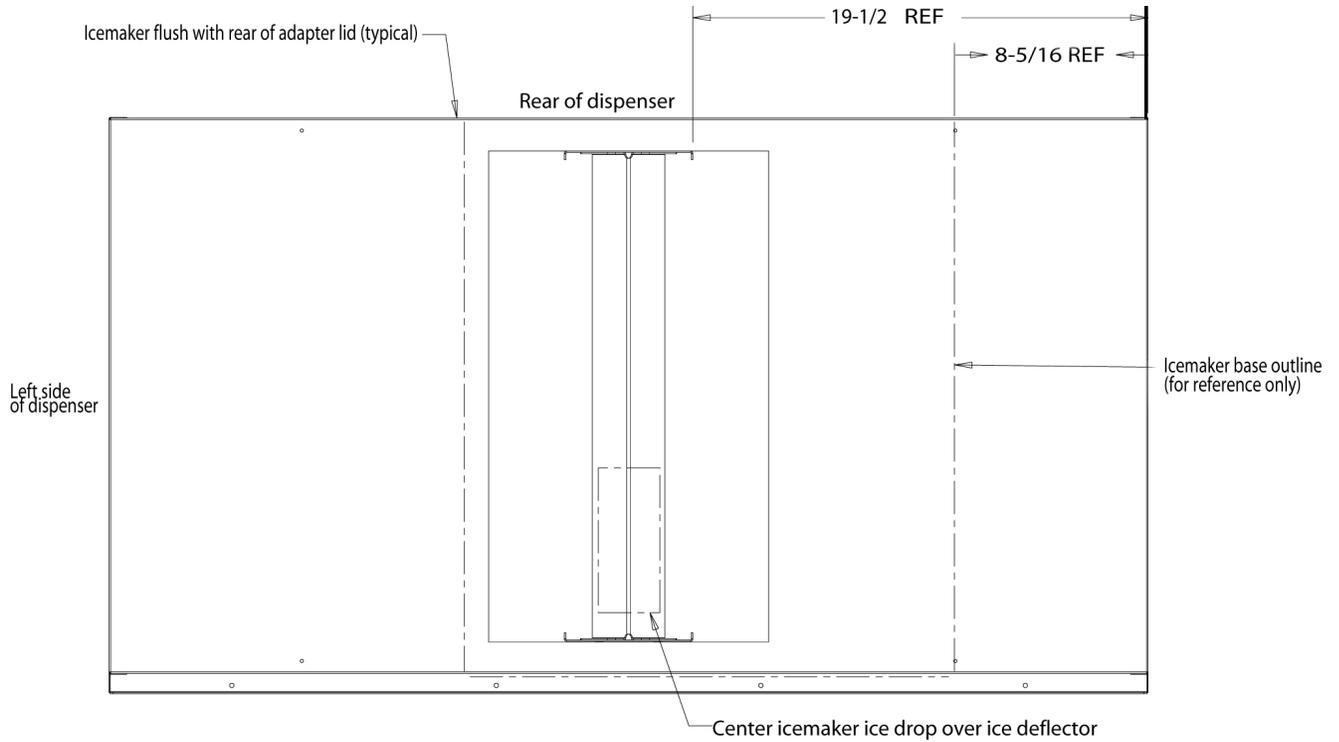

TOP VIEW
Figure 2.

NOTE: Be sure to center the ice drop opening of the icemaker directly over the deflector plate. Failure to do so may result in un-even hopper fill.

7. Tighten the four ice deflector mounting screws.
8. Follow the ice maker manufacturing instructions to complete the installation of the ice maker.
9. Install icemaker bin thermostat just underneath ice deflector. See Figure 3 for location area.

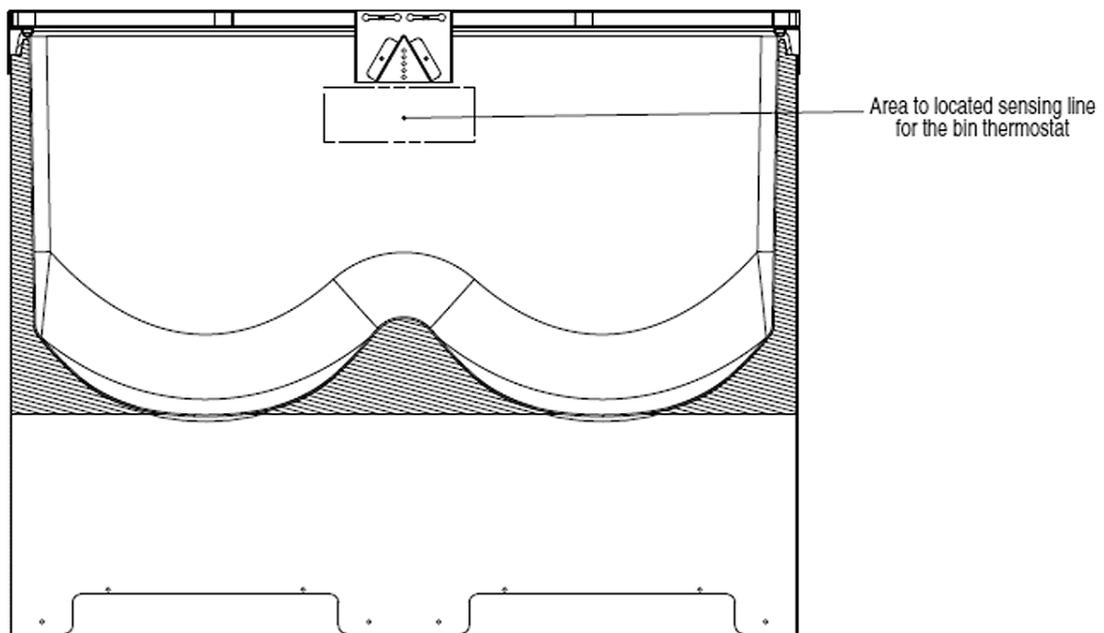


Figure 3.



NOTE: Failure to install a bin thermostat correctly may result in inadequate hopper fill, ice dispense issues, hopper “ice bridging”, and/or possible damage to the icemaker.

10. Apply a continuous bead of NSF International (NSF) listed silastic sealant (Dow 732 or equivalent) to seal the ice maker to the top of the adapter lid. All excess sealant *must* be wiped away immediately.
11. Place the manual fill cover in position over the flange on the lid assembly and the front access hopper opening.
12. Re-connect electrical power to the dispenser.
13. Verify function and operation of both icemaker and dispenser.