

INSTALLATION INSTRUCTION

FOR TETHERING LID TO DISPENSER

Table 1. Parts List

Item No.	Part No.	Description	Qty.
1	620051892	Tethering Cable	2

Tools Required:

Phillips Screwdriver



WARNING:

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.



WARNING:

Before starting installation, read and understand all safety label and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.


Failure to comply could result in serious injury, death or damage to the equipment.

Perform the following procedure to install the tethering strap to the unit.

- 1 Unpack and inspect the kit.
- 2 Remove the hinged lid and the merchandiser from the front of the unit by lifting and pulling the merchandiser toward you.
- 3 Remove the phillips screw from the left and right , top wrapper flange, as shown in Figure 1.



Left Side

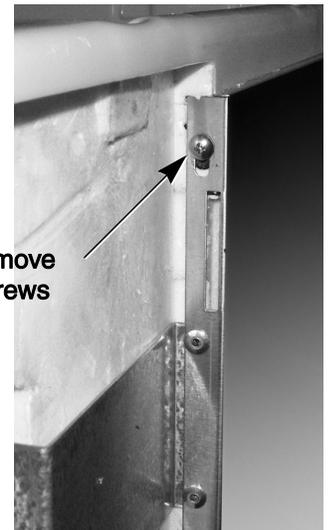

Right Side

Figure 1.

- 4 Attach the tether cable to the screw and reinsert the screw. Tighten the screw with the tether cable facing upward and inward, as shown in Figure 2. Refer to Figure 3 for details of the tether cable orientation.



Left Side



Right Side

Figure 2.

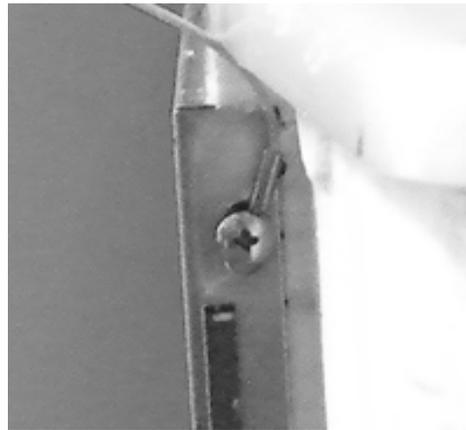


Figure 3.

- 5 Replace the merchandiser, making sure that both tether cables are free to move, as shown in Figure 4.



Figure 4.

- 6 Set the hinged lid back in place and make sure that both tether cables are securely attached to the lid.