

INSTALLATION INSTRUCTIONS

Kit Button Facia Asy CI2000 (P/N 569030114)

SAFETY INSTRUCTIONS

**WARNING:**

Before starting installation, read and understand all safety label and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.

Failure to comply could result in serious injury, death or damage to the equipment.

QUALIFIED SERVICE PERSONNEL

**WARNING:**

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit.

All wiring and plumbing must conform to national and local codes. Failure to comply could result in serious injury, death or equipment damage.

SAFETY PRECAUTIONS

This unit has been specifically designed to provide protection against personal injury. To ensure continued protection observe the following.

**WARNING:**

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.

**CAUTION:**

Always be sure to keep area around the unit clean and free of clutter.

Failure to keep this area clean may result in injury or equipment damage.

MANUAL INSTALLATION

1. Remove Button Facia from Unit.
2. Remove water and soda buttons from Facia.
3. Drill out water and soda holes of 0.625 diameter or 5/8".
4. To (1) 560007413 (item 1) switch push button add (1) 60680100 (item 2) Decal-FI CID soda per illustration.
5. To (1) 560007413 (item 1) switch push button add (1) 60680101 (item 4) Decal-FI CID soda per illustration.
6. Remove the locking nuts from the above switches and add switches to the drilled out 0.625 holes on Button Facia and secure with the previously removed locking nuts.
7. Now add (2) 560007412 item 3 lead wires to each of the above switches as per illustration.
8. Locate 21610031 wire harness soda and water on ID 90 unit, remove wires leading to (2) 60669004 air activated switches.
9. Re-wire black and red wires form harness to soda button.
10. Re-wire black and orange wires form harness to water button.
11. Add Button Facia to unit.

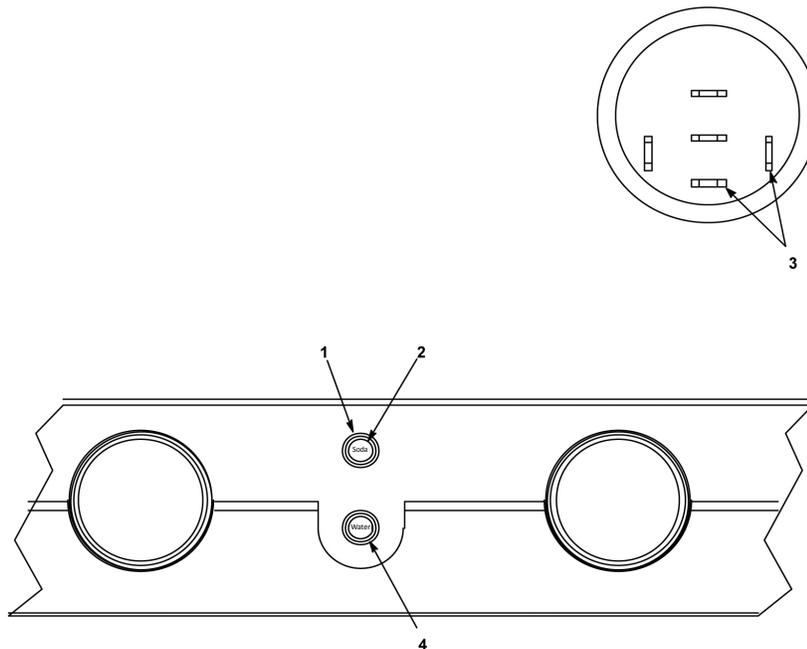


Figure 1.