




- Remove plastic bag and top cover
- Remove:
  - Manuals
  - Bag of parts
- Remove drip tray taped to splash panel and set aside.



- Bag contents:
  - (1) Clear plastic spray tube
  - (2) Pinch tubes (one pinch tube is a spare, store in a safe location for future replacement)




- Install plastic spray tube by placing the notched end into the top of the impeller housing then twist slightly clockwise to lock in place. Test by lifting gently on the tube to ensure it is locked in place. Finally, ensure the bend in the spray tube is facing the front of the bowl, as shown above.



- **Wet** pinch tube and insert into the outlet hole in front of the bowl. **Always wet the pinch tube before inserting.**



- Press dispense handle and push pinch tube through.

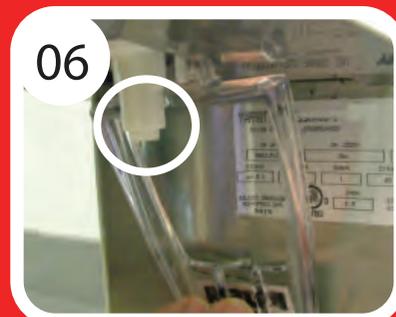

- Make sure tube is visible from bottom of the plastic pinch valve.



- Install drip tray by placing on metal arms.



- Fill bowl with approximately 2" of WATER to rinse and check for leaks. If water leaks out of evaporator gasket or pinch tube, drain and reinstall bowl and/or pinch tube.

- Repeat to ensure there are no leaks. Then drain water and fill with product.

**THIS COMPLETES THE INSTALLATION.**  
Plug unit in proper power outlet

**NOTE:** Unit will begin to spray and cool. Cooling time will depend on the product temperature.

For further assistance, please contact Customer Care at 800.238.3600