

INSTALLATION INSTRUCTIONS

ED300 ICE MAKER ADAPTER LID FOR KITS P/N 08027TE AND P/N 08030TE

Table 1. Loose Shipped Parts

Item No.	Part No.	Name	Qty.
1	29505	Lid Assembly	1
2	22127	Ice Maker Mounting Bracket	2
3	50904	RTV, 3 oz. Tube	1
4	620064177	Lid & Lanyard assembly ED300 Black (08027TE)	1
	620065192	Lid & Lanyard assembly ED300 Grey (08030TE)	
5	91957	Label, "Disconnect Power Before Cleaning"	1
6	620042919	ED300 Ice Baffle	1
7	620701601	Screw TF SM 10-16 PNP 16SS	12
8	620701902	#8-32 Nylon Acorn Nut	4
9	620701901	Sealing Washer	4
10	620701903	#8 Nylon Washer	4
11	08027TEINS	Installation Instructions	1
12	43164	Screw MA 08-32 TRPH 10 SS	2
13	70100	Nut HEX 08-32 SS Nylok	2

⚠ WARNING:

Disconnect power to the unit before installing the adaptor following all lockout/tag out procedures established by the user. Verify that all the power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.

⚠ WARNING:

All of the attachment screws and plates must be installed as directed in this manual.

Failure to comply could result in serious injury, death or damage to the equipment.

⚠ WARNING:

All ice baffle plates and bin stats, if included or recommended in this kit, must be installed as directed in this manual or the equipment manufacturer's instructions.

Failure to comply could result in serious injury, death or damage to the equipment.

⚠ WARNING:

The dispenser must be secured with 3/8 X16 bolts (6) to the counter before installing the ice maker adapter kit. Refer to the installation manual and for the counter mounting template.

NOTE: Adjust the automatic agitation timer located in the dispenser's electrical control box to 5 seconds on, 20 minutes off. Access to the timer is provided by removing the merchandiser/upper front panel.

1. Remove the top plastic bin covers (2) from the dispenser.
2. Place the Adapter lid assembly (item 1) on top of the dispenser and position it flush with the rear and sides of the dispenser as shown in Figure 1.
3. Install the ice baffle on the lid assembly as shown in .

IMPORTANT: The baffle prevents ice from over-filling the manual fill area during agitation/dispensing with a full storage bin and forcing the manual fill cover off.

4. Using the slotted holes in the lid as a template, drill (4) 0.147" diameter holes (#26 drill) at the bottom of the slots (see Figure 1. Detail A). **BE CAREFULLY NOT TO DRILL INTO THE ICE STORAGE BIN.** Secure the lid to the dispenser with (4) #10 sheet metal screws.
5. Seal the ice maker to the dispenser lid as follows (See Figure 1.).
 - A. Run beads of RTV around the opening in the lid and inside of the perimeter of the ice maker outline so that the ice maker will set on the RTV.
 - B. Set the ice maker onto the lid and position it as shown in Figure 1.
 - C. Wipe away the excess RTV.
6. Drill .147" diameter holes into the ice maker cabinet and the dispenser lid using the ice maker mounting brackets as templates. **USE CAUTION SO AS NOT TO DRILL INTO ANY ICE MAKER COMPONENTS (CONDENSER, TUBING, ETC.).** Secure the brackets using the #10 sheet metal screws provided.
7. Follow the ice maker manufacturers instruction to complete the installation of the ice maker including the bin thermostat if so equipped or required.

CAUTION:

The bin thermostat location must not interfere with agitator rotation.

8. Locate the cleaning caution label (item 5) on the manual ice fill cover (item 4) as shown in Figure 1. Place the manual fill cover in position over the flange on the lid assembly and the front access hopper opening.

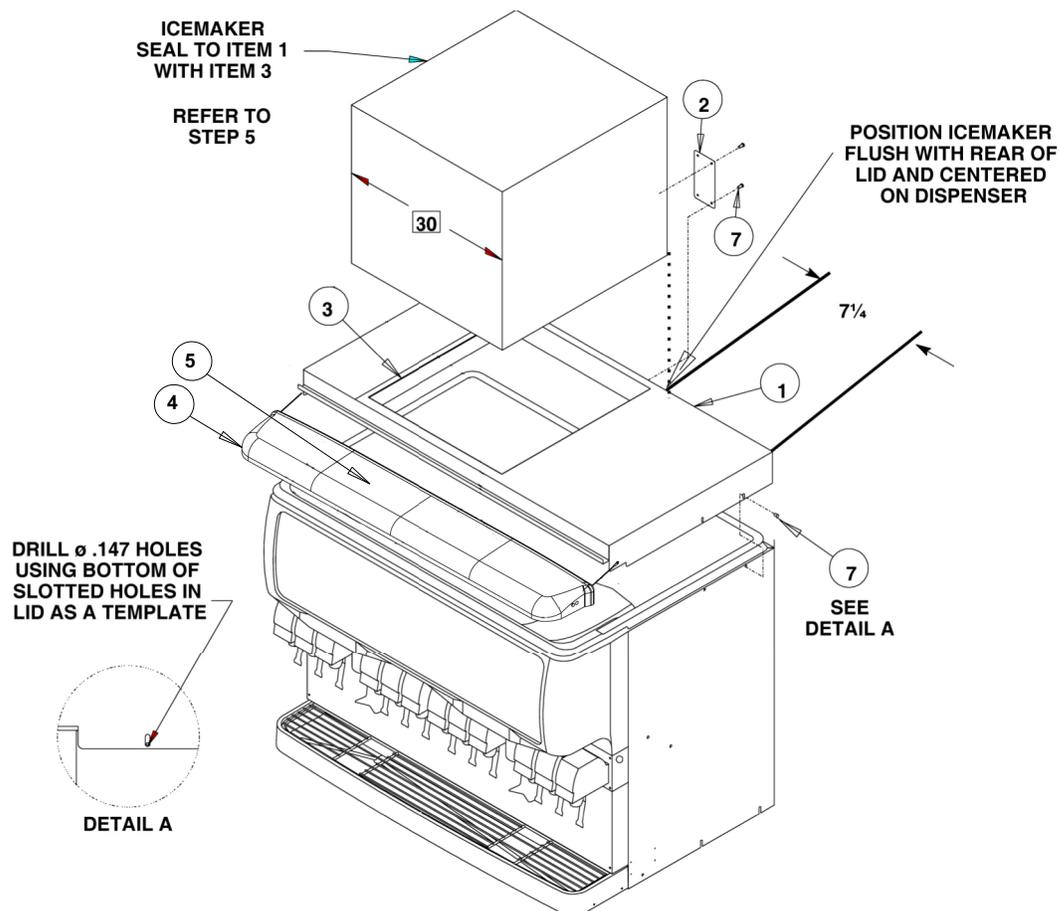


Figure 1. Dispenser

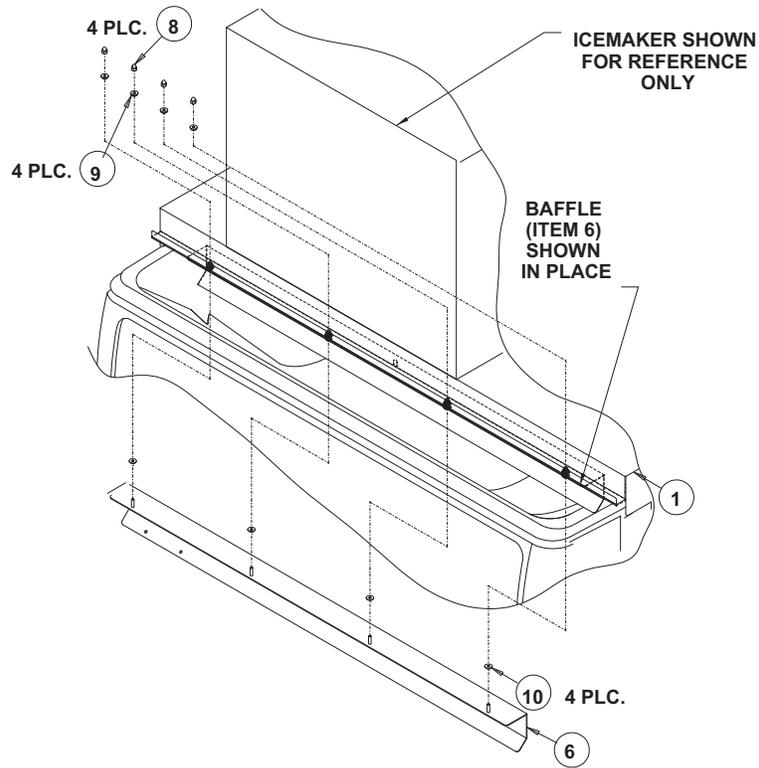


Figure 2. ED300 Baffle Kit

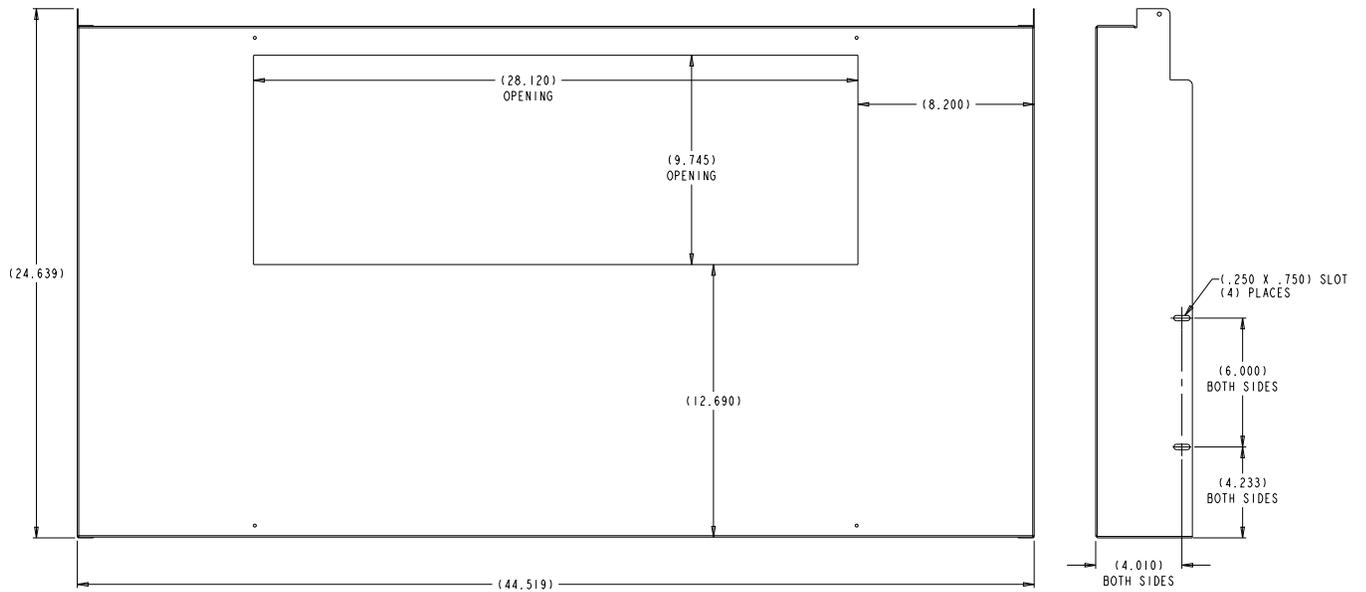


Figure 3. Reference Sheetmetal Cover Opening Dimensions for Mounting Ice Maker.