



INSTALLATION INSTRUCTIONS

Nordic B230, 322, 430-AP and B530-SS Plastic Storage Bins

SAFETY INSTRUCTIONS



WARNING:

Before starting installation, read and understand all safety label and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.

Failure to comply could result in serious injury, death or damage to the equipment.

QUALIFIED SERVICE PERSONNEL



WARNING:

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit.

All wiring and plumbing must conform to national and local codes. Failure to comply could result in serious injury, death or equipment damage.

SAFETY PRECAUTIONS

This unit has been specifically designed to provide protection against personal injury. To ensure continued protection observe the following:



WARNING:

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.



CAUTION:

Always be sure to keep area around the unit clean and free of clutter.

Failure to keep this area clean may result in injury or equipment damage.

INSTRUCTIONS

The following parts are separately packaged and shipped with the ice storage bin:

Description	Part Number	Qty.
Leg Set	08660	1
Strap Bin Tie	620204713	2
Drain Fitting	41710	1
Screw #14 x 1/2	28776	2
Screw #10 x 3/4	638007972-03	2
Ice Scoop	43651	1

1. After the carton has been removed, the accessory packages can be removed from the inside of the bin. Open them and check contents against the above list.
2. Lay the bin on its back on blocks at least 3" high. Remove the bolts holding the skid to the bin.
3. Unpack the legs and screw them into the tapped holes provided in the bin bottom. BE SURE that the legs are screwed in tight enough so that the leg "seats" against the bin bottom.
4. Set the bin upright. Move bin to permanent location. Adjust leg levelers so the bin is level in all planes.
5. Connect necessary piping to the 3/4 FPT in the back of the bin.

NOTE: All piping should slope downward to an open drain and must meet all plumbing codes.

6. Place the ice machine on top of the bin, making sure that the outside edge of the ice maker lines up with the outside edges of the bin. The ice maker must then be sealed, both on the outside and the inside bottom edges, with an approved NSF mastic such as Dow Silastic #732, #734 or General Electric #101 or #102. This is a NSF requirement and the responsibility of the installer.
7. Anchor the ice machine to the storage bin using two straps, two #14 x 1/2 screws, and two #10 x 3/4 screws provided in the accessory package. With the ice maker placed flush with the rear of the bin attach the straps to the pre-drilled holes in the icemaker using the #10 screws. Once these are attached to the icemaker use the brackets as a template to drill two 9/64" holes in the bin. Be careful not to drill through the inner liner.
8. Once the pilot holes are drilled attach using the #14 screws. Carefully drive the screws into the bin. Do not strip the holes. This is a U.L. requirement and the responsibility of the installer (See Figure 1).

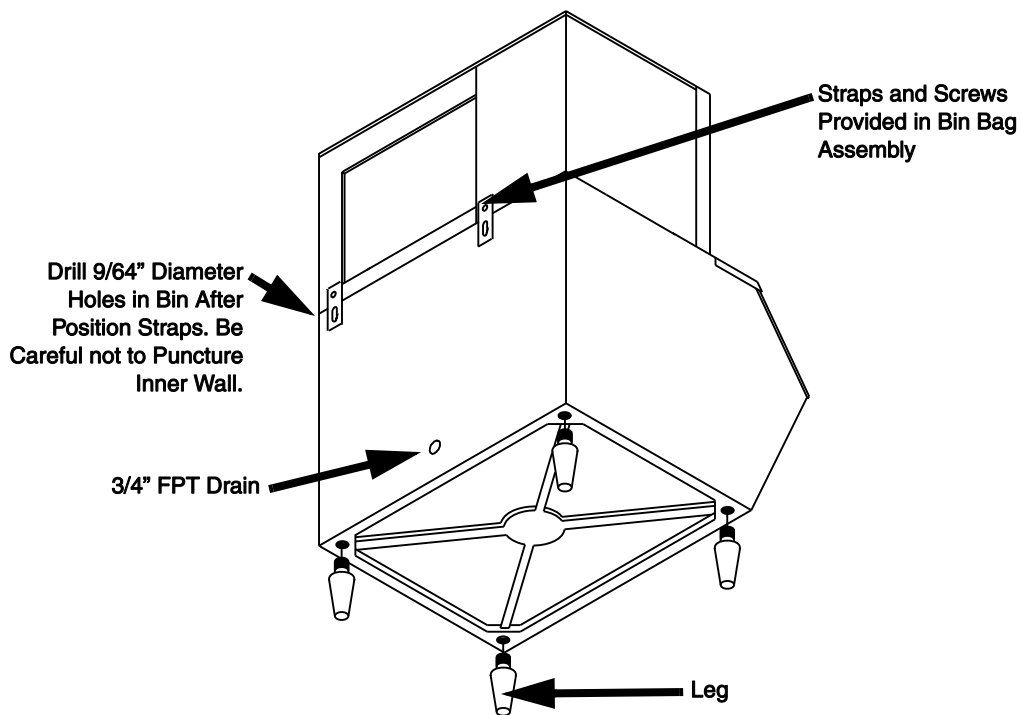


Figure 1

Cleaning and Sanitizing Procedure

1. To clean exterior plastic surfaces, use a mild household detergent and a plastic bristle brush, rinse with clean water.

**IMPORTANT:**

Never use an abrasive cleaner or steel wool.

2. To clean exterior stainless steel surfaces, use a commercial stainless steel cleaner and a soft cloth.

**IMPORTANT:**

Never use an abrasive cleaner or steel wool.

3. To clean the inside of the ice bin, use a mild liquid detergent. Using a plastic bristle brush, scrub the ice bin including both sides of the ice deflector, inside of door, around top and door trim, and the inside top cover of the bin. Rinse thoroughly with clean potable water.

**IMPORTANT:**

Never use an abrasive-type cleaner. It will damage the plastic liner.

4. Lime and scale deposits may be removed from ice bin walls by using a cleaner such as "Nu Calgon Liquid Ice Machine Cleaner." Follow the directions for use on the side of the bottle.
5. To sanitize, fill a mechanical spray bottle with a sanitizing solution of 1/4 ounce of liquid laundry bleach to one gallon of warm water. Spray all surfaces cleaned in step 3. Be sure to wet down completely. Allow to air dry, do not rinse. A commercial sanitizer may also be used following the directions on the container.