





CAUTION - Only trained and certified technicians should service this unit. ALL WIRING AND PLUMBING MUST CONFORM TO NATIONAL AND LOCAL CODES.




1. Remove Cover

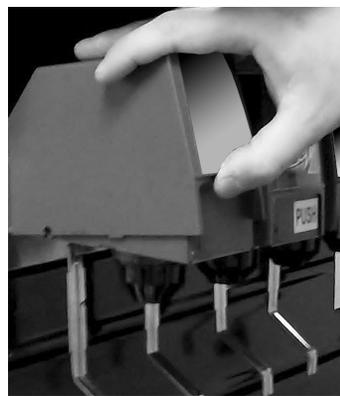


2. Unplug Power Connector

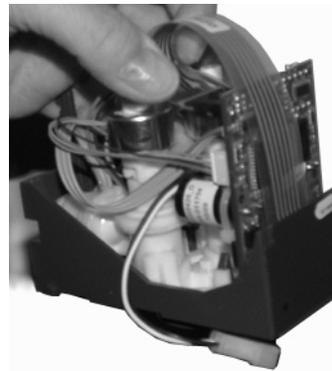

3. Disconnect keypad from PCB

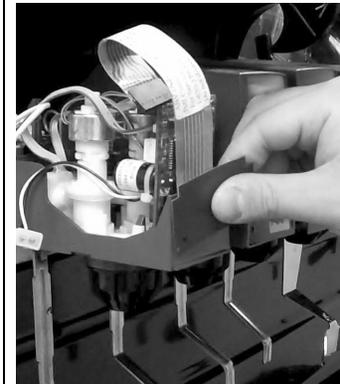

4. Carefully peel keypad off face of base

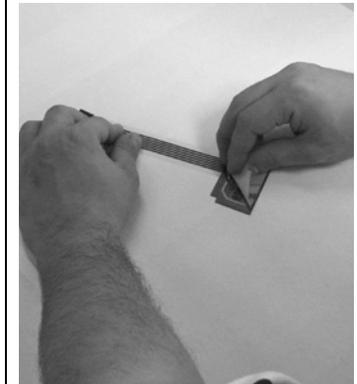

5. Remove paper backing from new keypad



6. Position keypad flush w/bottom of unit, center keypad & press in place.



7. Reconnect keypad connector to PCB



8. Reconnect power connector

9. For Portion Control Valves:

Check and verify that portion sizes are correct. If not, perform the manual portion procedure. (Refer to TomCat manual for details. Part No. 620920851INS)

For Lever or Pushbutton Valves:
Dispense product for 4 to 5 seconds.

If problems are encountered, contact Cornelius Technical Support at 1-800-238-3600.