

INSTALLATION INSTRUCTIONS

FOR "K" STYLE LID KIT, P/N 08032Q0531

This "K" style lid kit applies to the following ice makers and are for use with DF/ED 150 dispensers, no manual ice fill.

Table 1. Applicable Models

Ice Maker	Size
Hoshizaki KM250/450/500/630/650	22"

Table 2: Loose Shipped Parts

Item No.	Part No.	Name	Qty.
1	620011901Q0531	Lid Assembly, "K" Style	1
2	15303	Bracket	2
3	50904	RTV Sealant 3oz. Tube	1
4	602701601	#10 X 1/2" Sheet Metal Screw	6
5	620902101Q0531	Installation Instructions	1

 **WARNING:**

Disconnect power to the unit before installing the adaptor following all lockout/tag out procedures established by the user. Verify that all the power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.

 **WARNING:**

All ice baffle plates and bin stats, if included or recommended in this kit, must be installed as directed in this manual or the equipment manufacturer's instructions.

Failure to comply could result in serious injury, death or damage to the equipment.

 **WARNING:**

All of the attachment screws and plates must be installed as directed in this manual.

Failure to comply could result in serious injury, death or damage to the equipment.


1. Set Ice maker lid on the top of the dispenser and position it flush with the back and sides of the dispenser.
2. Using the slotted holes in the lid as a template, drill four (4) 0.147" diameter holes at the bottom of the slots (see Detail A). **Use extreme care not to drill into the hopper.** Fasten the lid to the dispenser with four (4) #10 sheet metal screws, two on each side.
3. Seal the ice maker to the top of the dispenser as follows:
 - A. Apply beads of RTV around the opening in the lid and inside the perimeter of the ice maker outline so that the ice maker sets on the RTV.
 - B. Set the ice maker onto the lid and position it as required.
 - C. Wipe away any excess RTV.
4. Remove the two rear screws (only) installed in Step 2. Use those screws to install the mounting brackets (item 2). Drill 9/64" diameter holes into the ice maker cabinet using the bracket as a template. **Use extreme caution not to drill into any ice maker components (condenser, tubing, etc.).** Secure the brackets using the screws provided.
5. Follow the ice maker manufacturer's instructions to complete the installation of the ice maker including the bin thermostat, if so equipped or required.

NOTE: Bin thermostat must not interfere with the agitator rotation.



DRILL 9/64 (.140 DIA.) HOLES USING
BOTTOM OF SLOTTED HOLES AS
A TEMPLATE

DETAIL "A"
ENLARGED

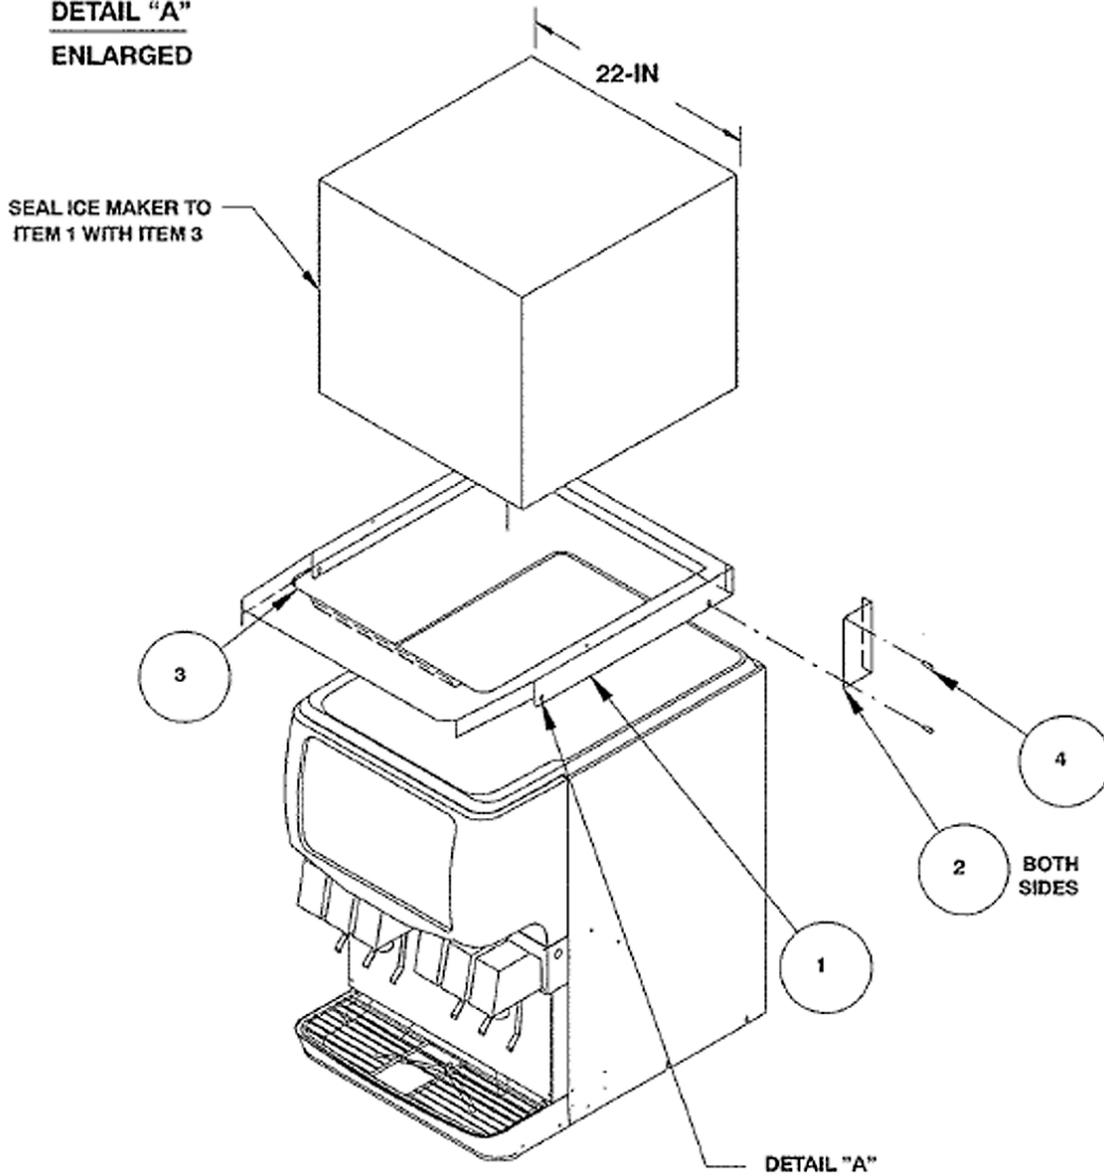

NOTE: Position ice maker flush with the right hand side for left side manual fill. Position ice maker flush with the left hand side for right side manual fill.

Figure 1.