

INSTALLATION INSTRUCTIONS

DB150 LIGHTED DISPLAY KIT #629081301



WARNING: Disconnect unit from electrical power source before installing the lighted display.

1. Remove service panel from upper front panel (2 screws).
2. Remove upper front panel from cabinet (2 screws). Reinstall these screws in the same location of the cabinet flange. Leave about a 1/8" gap between the head of the screw and the cabinet. The lighted display has (2) "key-slot" holes on the back for "hanging" on these screws.
3. Connect the lighted display power cord to the unit electrical control box as shown in Figure 1. Using the wire ties provided in the kit. Route the power cord over the top of the gate solenoid.
4. Remove the top cover and the front plastic panels (2) from the lighted display.
5. "Hang" the lighted display on the mounting screws (2) of step 2 as show in Figure 2. Tighten the screws to secure the lighted display to the cabinet.
6. Connect the lighted display harness to the power cord of step 3. Using the remaining wire ties, secure the electrical harness to prevent interference with the gate solenoid mechanism.
7. Install the service panel supplied in the kit to the lighted display as shown in Figure 2 with (2) knurled-head screws.
8. Replace the lighted display front panels and top cover.
9. Connect electrical power to the unit. Check that the display is illuminated.

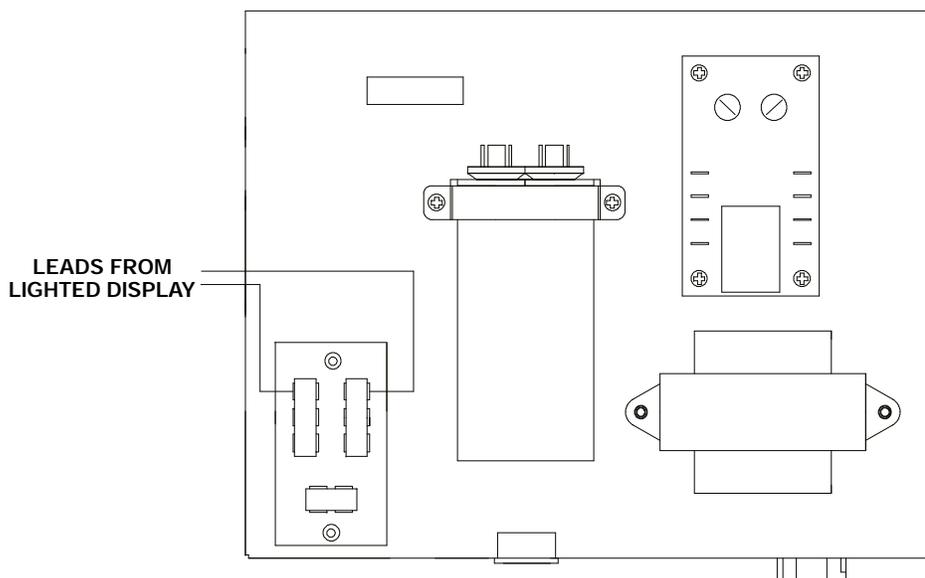


FIGURE 1.

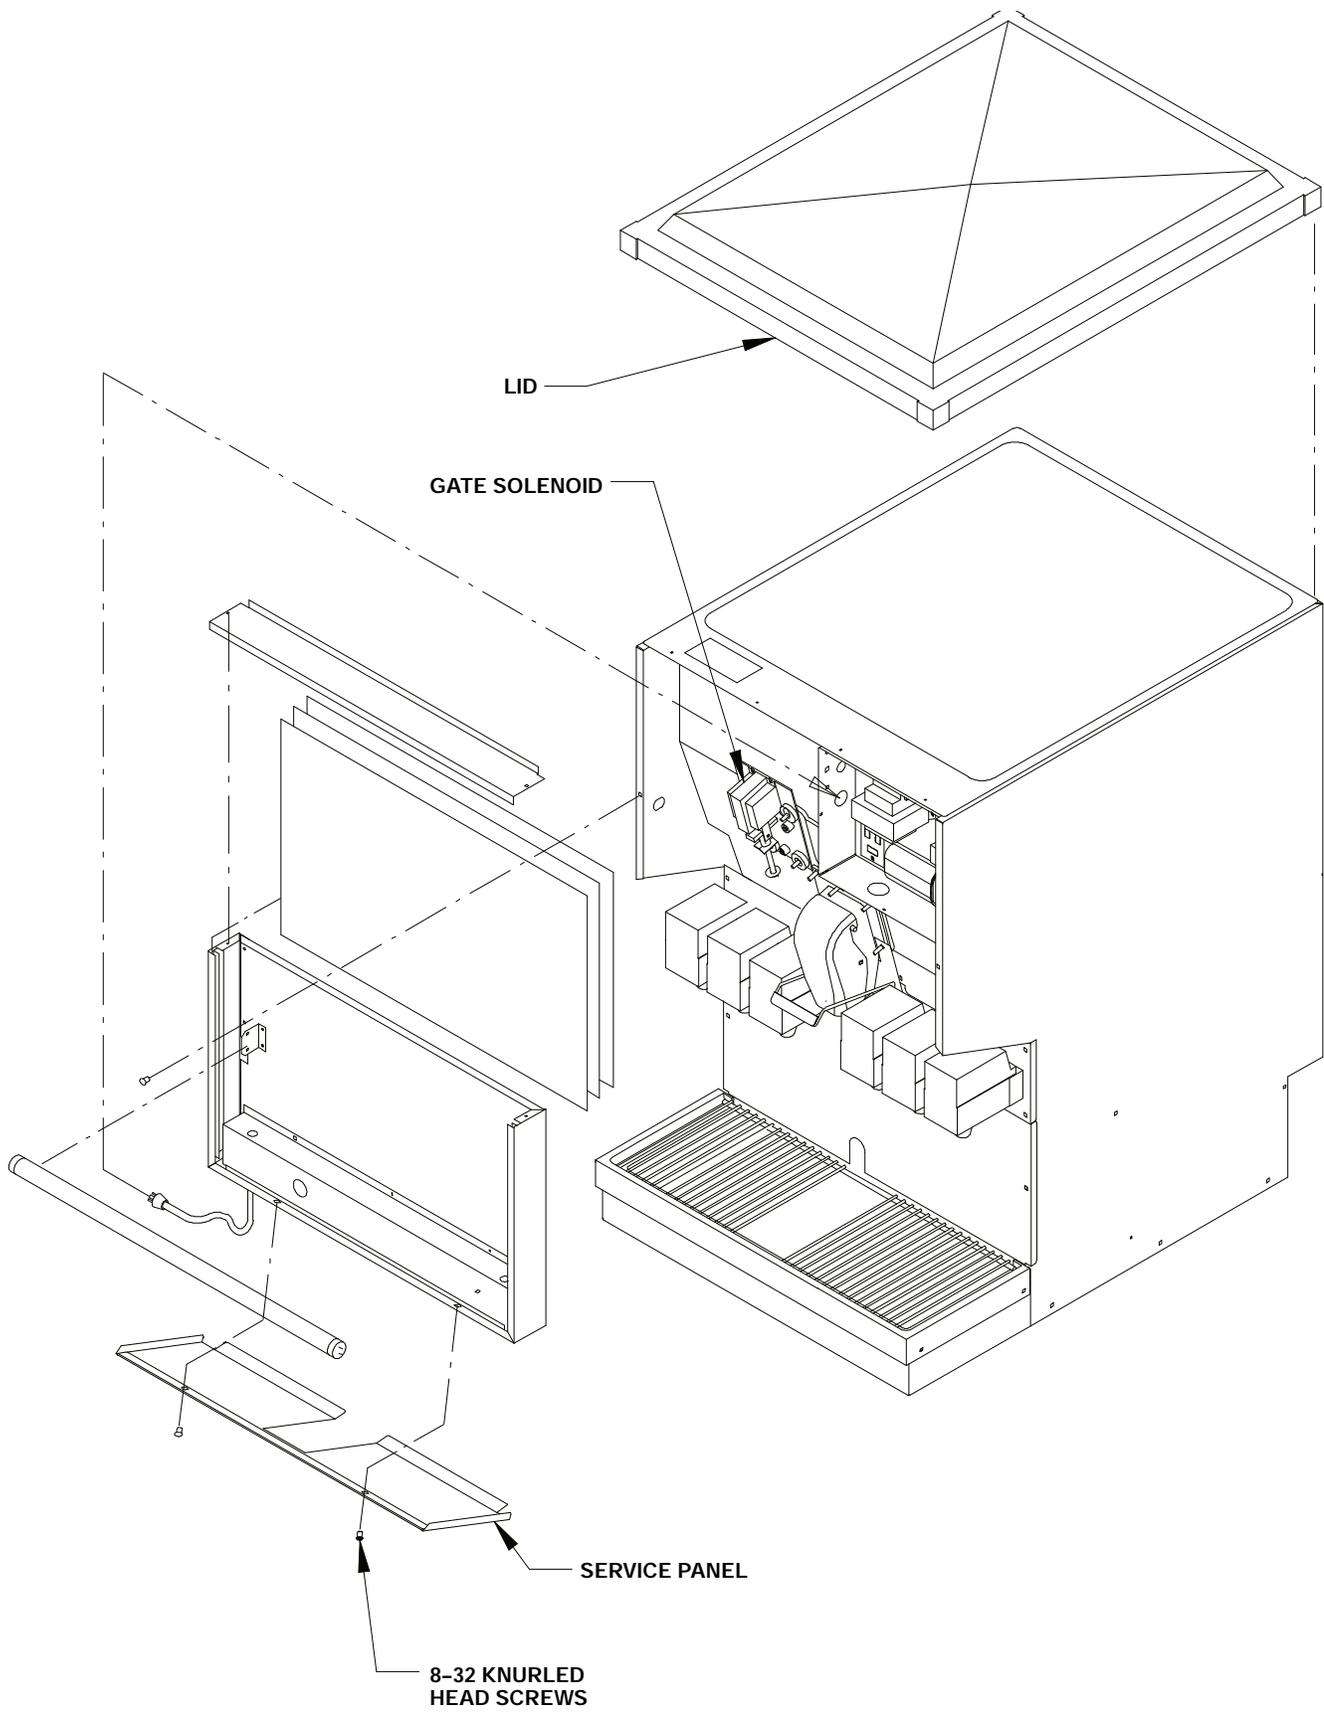


FIGURE 2.