



# INSTALLATION INSTRUCTIONS

---

## LIGHTED MERCHANDISER KITS P/N 629082601, 629082602, 629082603, 629082604, AND 629082605

1. Disconnect dispenser from power supply.
2. Remove manual ice fill cover from dispenser.
3. Remove merchandiser from dispenser.
4. Install right and left side main support. Hooks must be fully seated in slots in cabinet.
5. Secure main supports to dispenser lid with 8-32 x 1/2-inch sheet metal screws.
6. Install lift support rod with hand grabs facing toward main support.
7. Secure electric box assembly to main supports with two (2) 1/4 - 20 x 1/2-inch screws with lockwashers and flatwashers.
8. Secure capnut to ends of lift support rod.
9. Install left, right and center skirts with 8-32 x 1/2-inch sheet metal screws. See detail for proper installation. **Note: It may be necessary to remove the beverage valve to install the skirts.** Remove only the valve covers and valve body. *Do not* remove the valve block secured to the valve panel or leaking may occur.
10. Secure the merchandiser to the electric box assembly.
11. Install access cover to the inside of the merchandiser.
12. Using thumbscrews and captivated washer secure the merchandiser to left and right skirts.
13. Connect electric box of new merchandiser to wall outlet with cord.
14. Reconnect dispenser to power supply.



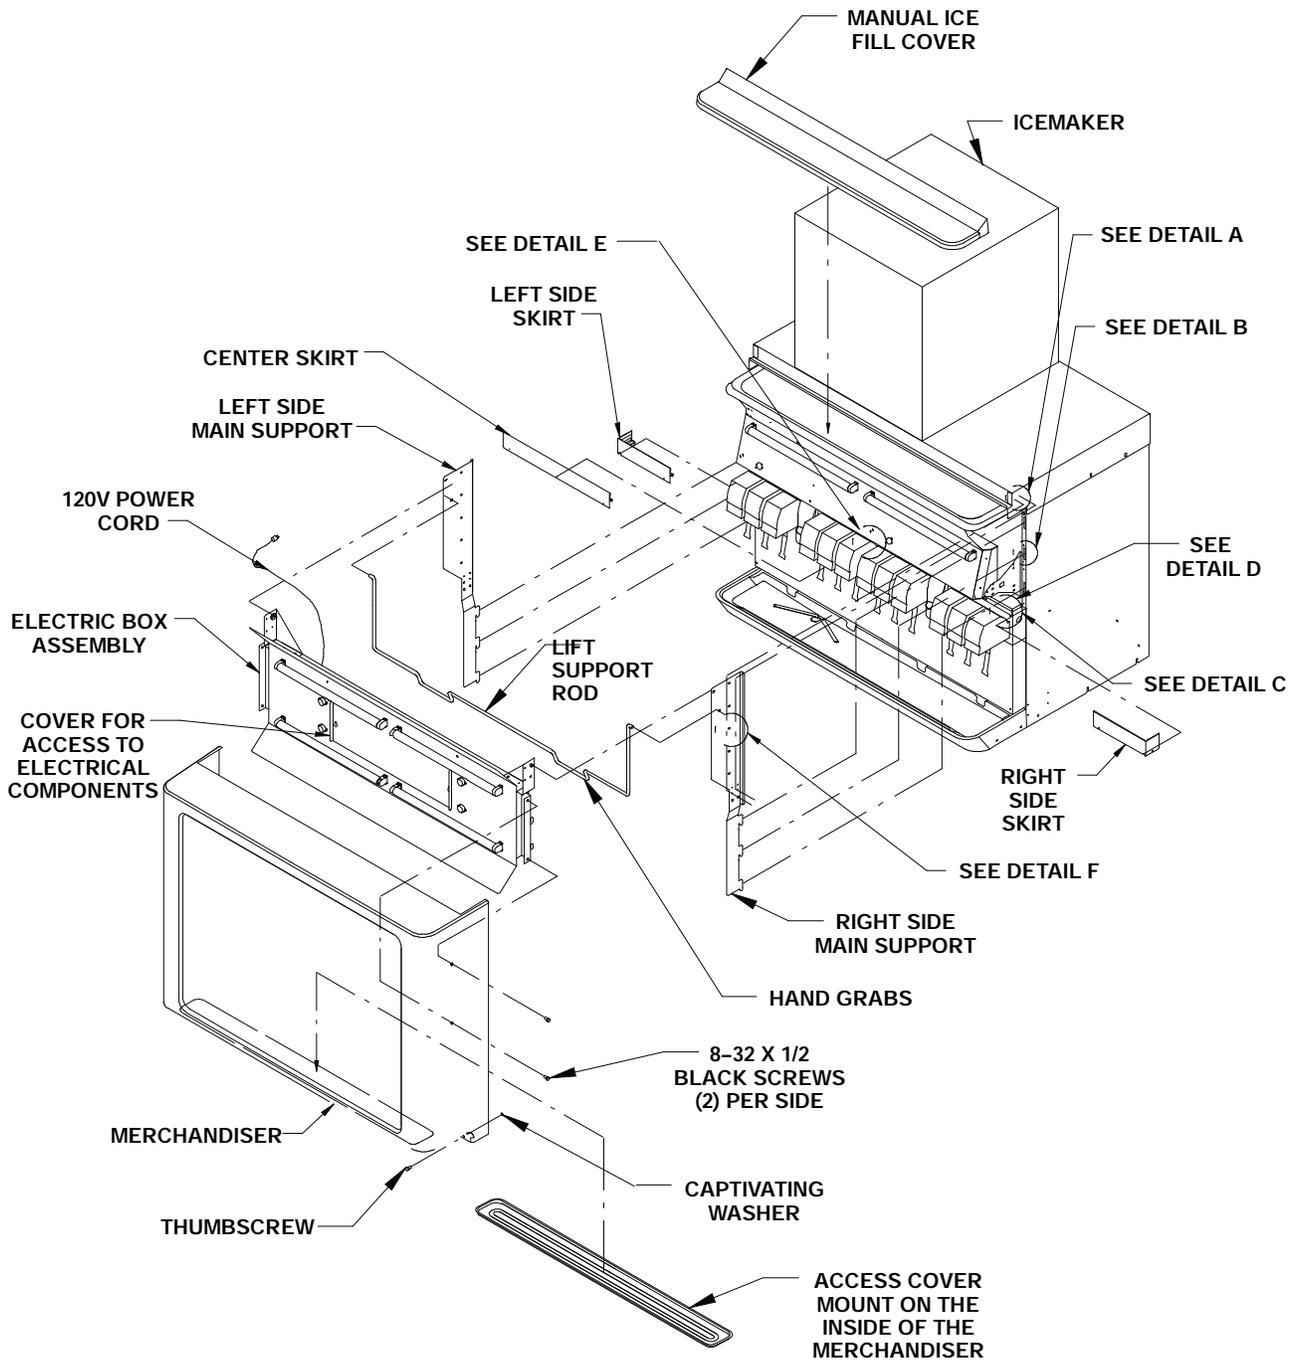



FIGURE 1.

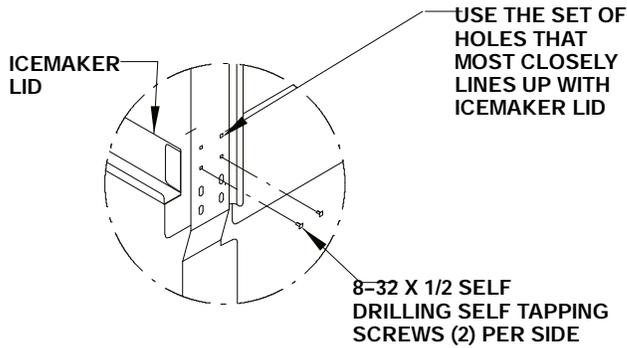


**DETAIL A**

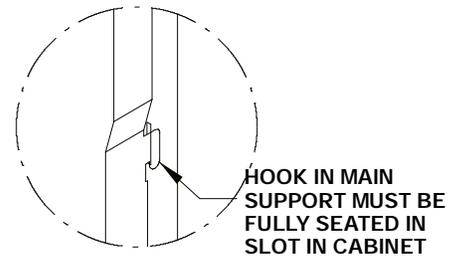


**DETAIL B**

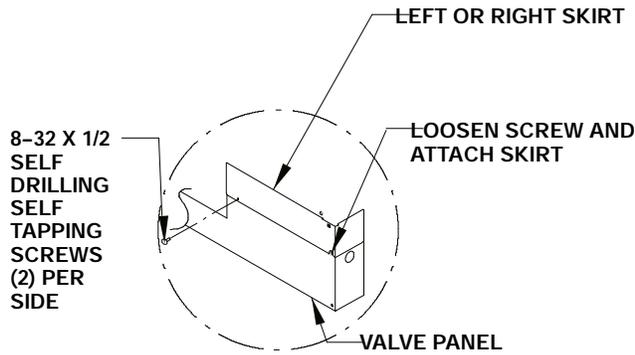

**DETAIL C**

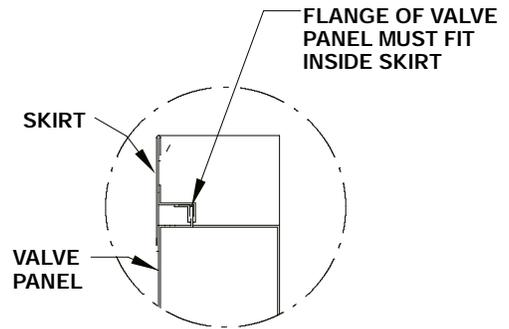


**DETAIL D**

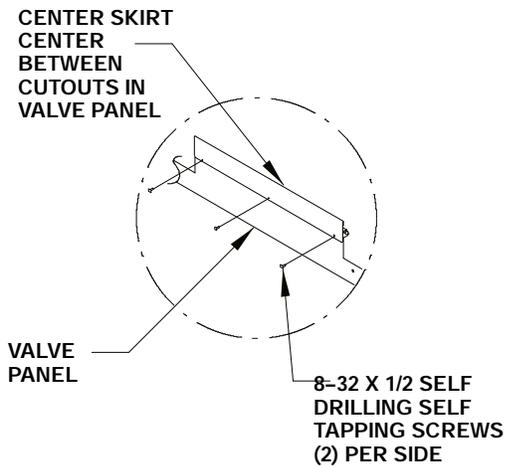


**DETAIL E**

ON ICEMAKERS FLUSH WITH THE EDGE OF THE DISPENSERS, SECURE THE MAIN SUPPORTS TO ICEMAKER AT UPPER MOST POINT WITHOUT INTERFERING WITH INTERNAL ICEMAKER COMPONENTS

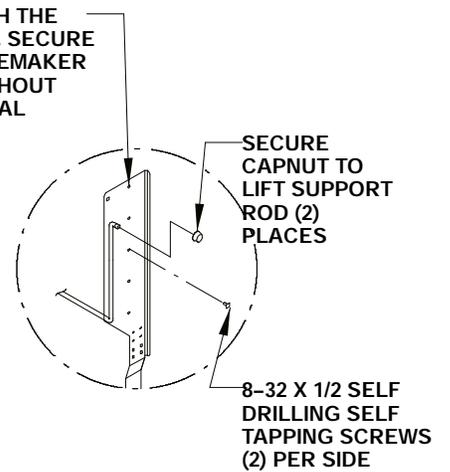


**DETAIL F**

**FIGURE 2.**

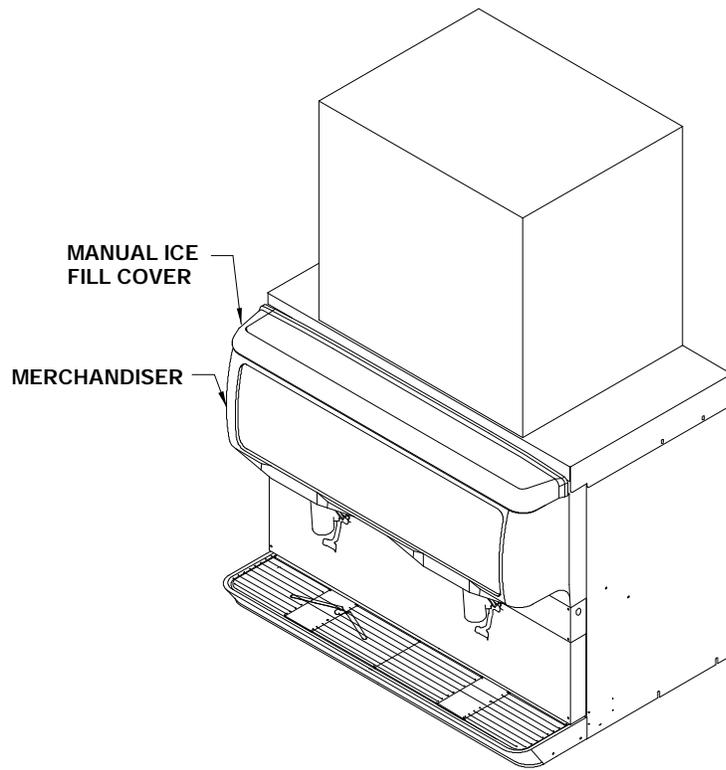

**FIGURE 3.**

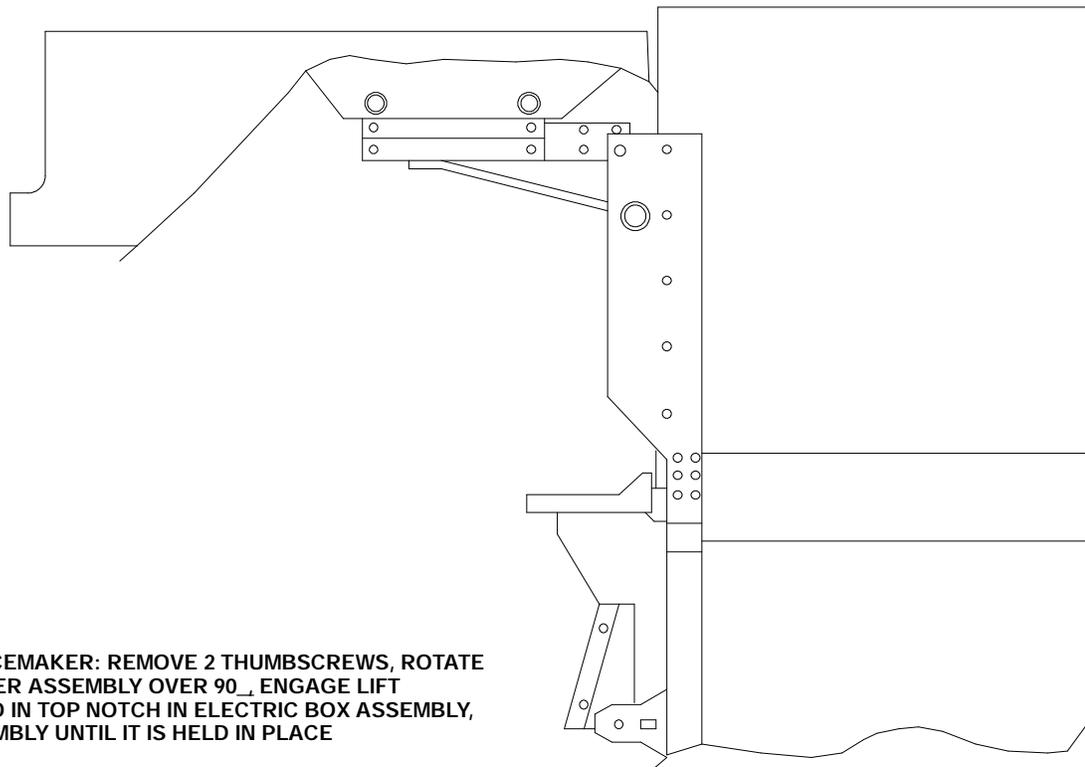

**TO SERVICE ICEMAKER: REMOVE 2 THUMBSCREWS, ROTATE MERCHANDISER ASSEMBLY OVER 90°, ENGAGE LIFT SUPPORT ROD IN TOP NOTCH IN ELECTRIC BOX ASSEMBLY, LOWER ASSEMBLY UNTIL IT IS HELD IN PLACE**

**FIGURE 4.**