



INSTALLATION INSTRUCTIONS

"K" STYLE LID KIT, P/N 629083301

These "K" style kits apply to the following ice makers:

Table 1. Applicable Models

Ice Maker	Size
Cornelius 330/530/630/830/1030/1230	30"

Table 2. Loose Shipped Parts

Item No.	Part No.	Name	Qty.
1	620027707	Lid Assembly, "K" Style	1
2	620027710	Lid, Gasket Ass'y	1
3	620027709	Bracket, Mounting.	2
4	70217	#8 x 1/2" Steel Hex Hd.	8
5	70188	Thumb Screw	3
6	50904	RTV, Clear, 732, 3 oz. Tube	1
7	90221	Label, <i>Disconnect Before Cleaning</i>	1
8	920909901	Installation Instruction	1



WARNING:

Disconnect power to the unit before installing the adaptor following all lockout/tag out procedures established by the user. Verify that all the power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.



WARNING:

All ice baffle plates and bin stats, if included or recommended in this kit, must be installed as directed in this manual or the equipment manufacturer's instructions.

Failure to comply could result in serious injury, death or damage to the equipment.



WARNING:

All of the attachment screws and plates must be installed as directed in this manual.

Failure to comply could result in serious injury, death or damage to the equipment.

1. Remove the plastic hopper covers (2) that were shipped with the unit.
2. Remove the two (2) screws from each side of the dispenser cabinet. Place the "K" style lid on the unit and use the four (4) screws that were removed to fasten the lid in place.
3. Seal the ice maker to the top of the dispenser after determining the correct location for the ice maker (see Figure 1). Using the mounting brackets as gauges to position the ice maker, left to right. Place the side of the ice maker flush with the soffit wall (approximately 5" from front of Stainless Steel Lid).
 - A. Run beads of RTV around the opening in the lid and inside of the perimeter of the ice maker outline so that the ice maker will set on the RTV.
 - B. Set the ice maker onto the lid and position it as required.
 - C. Wipe away the excess RTV.
4. Install mounting brackets by drilling 9/64" diameter holes into the dispenser cover and the ice maker cabinet using the bracket as a template. Use extreme care not to drill into any ice maker component (condenser, tubing, etc.) or into the dispenser hopper. Secure the brackets using the screws provided.
5. Follow the ice maker manufacturers instruction to complete the installation of the ice maker including the bin thermostat if so equipped or required.

CAUTION:
Bin Thermostat must not interfere with the agitator rotation.

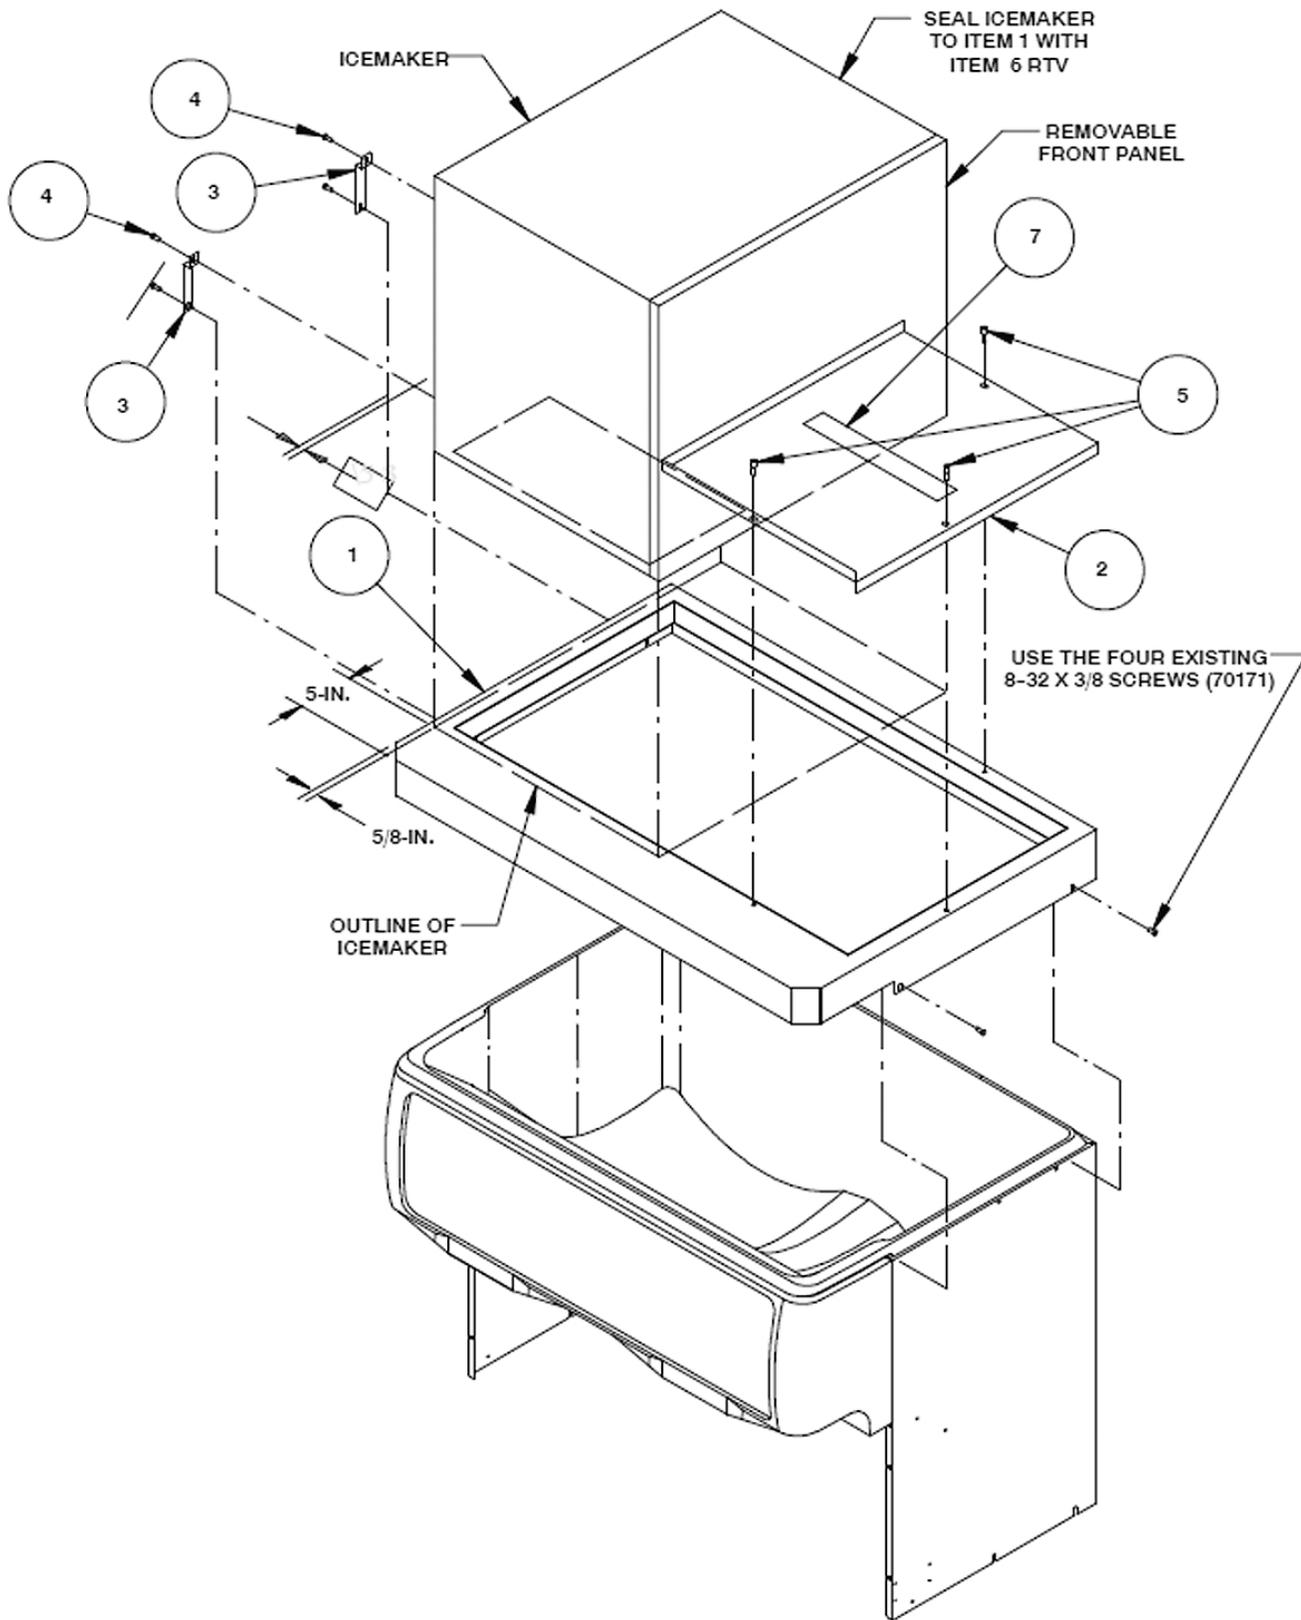


Figure 1.