

INSTALLATION INSTRUCTIONS

ED300 Integrated Lighted Merchandiser Kit

NOTE: Applicable for Kit P/N 629082605, P/N 629085701, P/N 629085702, P/N 629086601, P/N 629086602, P/N 629086603, P/N 620987485

SAFETY INSTRUCTIONS

 **WARNING:**

Before starting installation, read and understand all safety label and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.

Failure to comply could result in serious injury, death or damage to the equipment.

QUALIFIED SERVICE PERSONNEL

 **WARNING:**

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit.

All wiring and plumbing must conform to national and local codes. Failure to comply could result in serious injury, death or equipment damage.

SAFETY PRECAUTIONS

This unit has been specifically designed to provide protection against personal injury. To ensure continued protection observe the following:

 **WARNING:**

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.

 **CAUTION:**

Always be sure to keep area around the unit clean and free of clutter.

Failure to keep this area clean may result in injury or equipment damage.

KIT INSTALLATION

WARNING:

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.

1. Remove and discard the manual ice fill cover and merchandiser from the dispenser (see Figure 1).
2. Install the integrated merchandiser assembly on the dispenser cabinet (see Figure 2 and Figure 3, Detail B). Make sure that the (3) hooks on both the left and right main supports are fully seated in the corresponding slots in the cabinet.

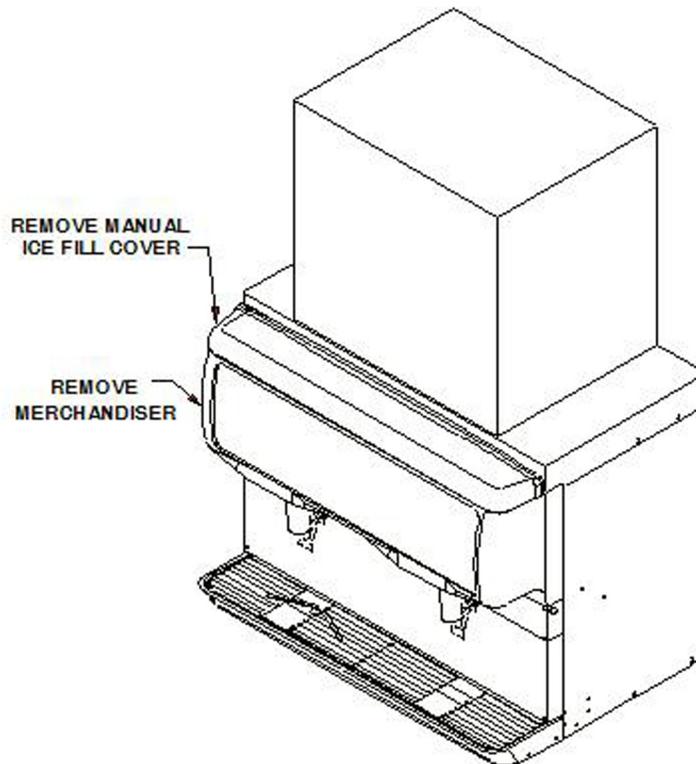


Figure 1.

3. Secure the left and right main supports of the integrated merchandiser to the ice maker adapter lid with No. 8 X1/2 in. long sheet metal screws (refer to Figure 3, detail A).
4. Refer to Figure 3, details C, D, and E to install the left, right, and center skirts on the beverage valve panel.

NOTE: It may be necessary to remove the beverage valves to install the skirts. Remove only the valve covers and valve bodies. Do not remove the valve blocks secured to the valve panel or leaking may occur.

5. Install the clear graphics access cover to the inside of the merchandiser with (2) No. 8-32 thumbscrews.
6. Using (2) No. 8-32 thumbscrews and captivating washers, secure the merchandiser to the left and right skirts (see Figure 2).

RESTORING DISPENSER TO OPERATION

1. Connect the power cord of the integrated merchandiser electric box to a wall outlet. Reconnect the power cord of the dispenser to its power supply. The dispenser is now ready for operation.
2. For service access to the dispenser electrical control box and to the ice maker, refer to Figure 4 for raising the integrated merchandiser assembly. Make sure that the lift support rod is engaged in both the left and right notches on the electric box.

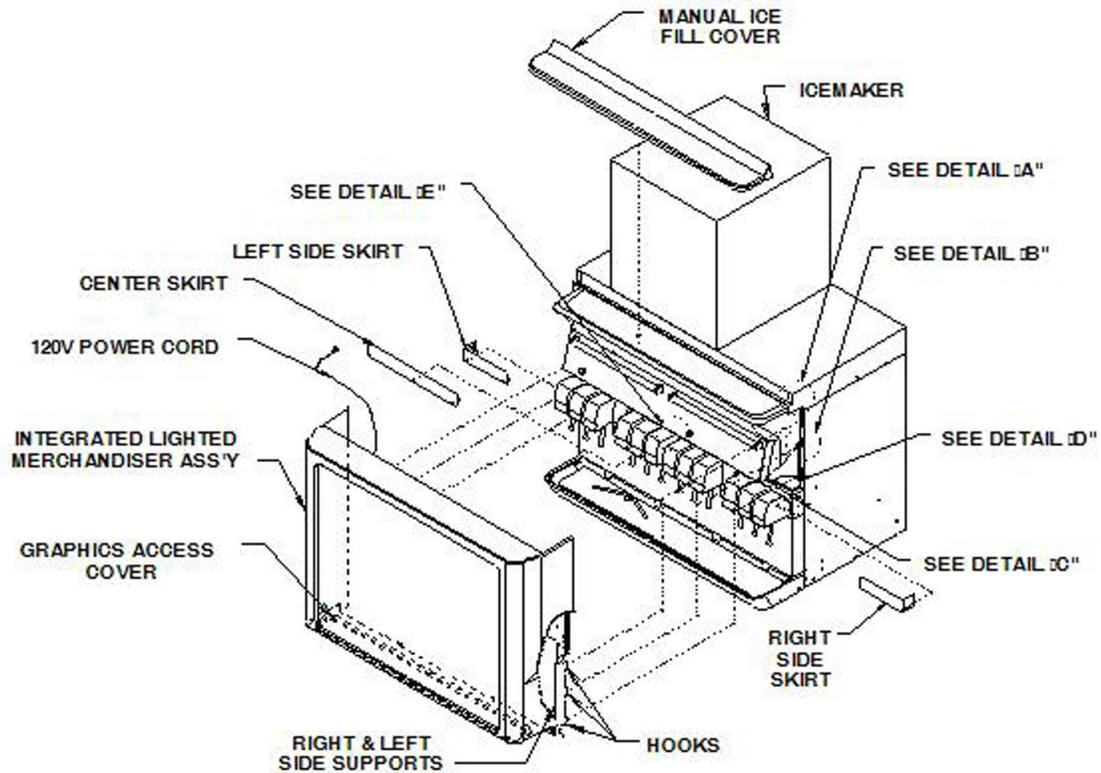


Figure 2.


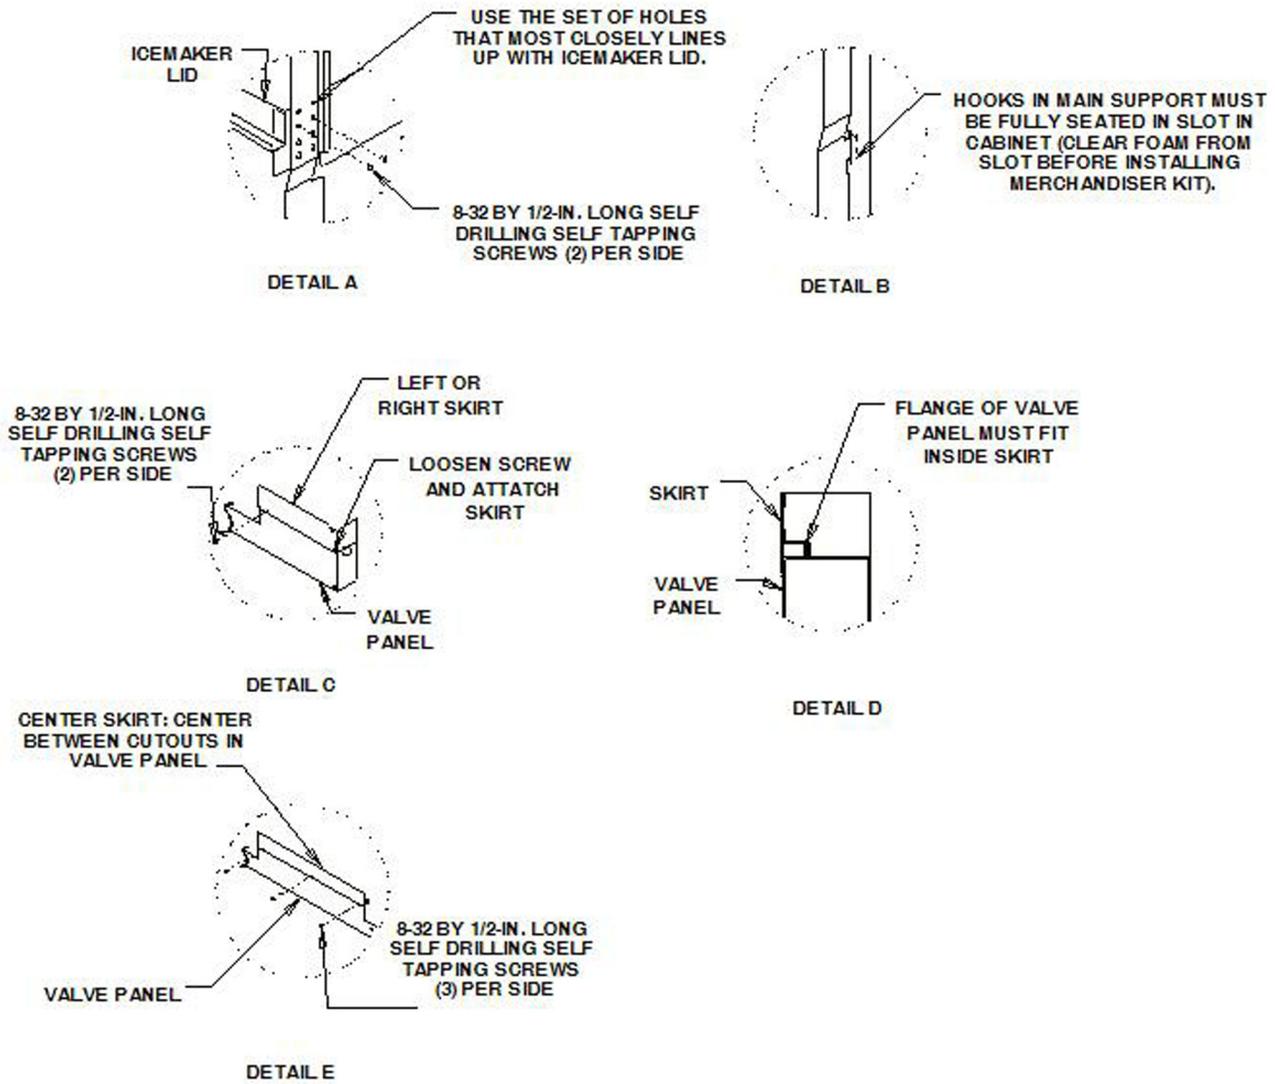


Figure 3. Details

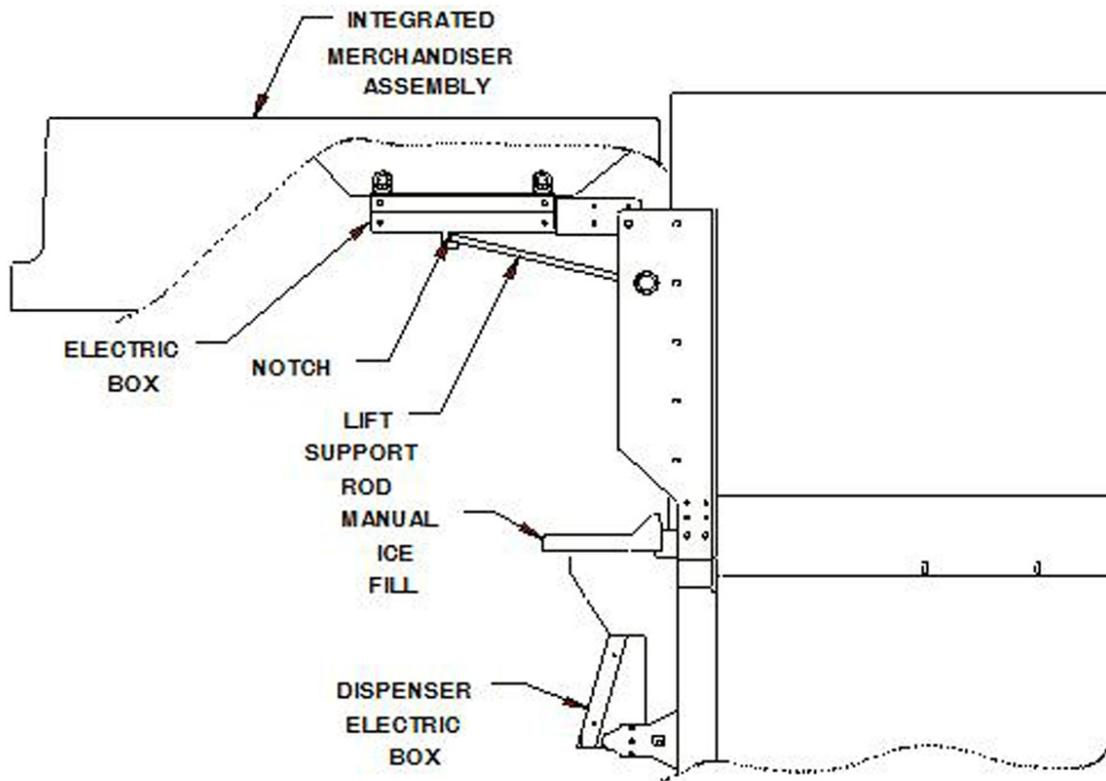

TO SERVICE ICEMAKER: REMOVE (2) THUMBSCREWS, ROTATE MERCHANDISER ASSEMBLY OVER 90°, ENGAGE LIFT SUPPORT ROD IN BOTH THE LEFT AND RIGHT SIDE NOTCH ON THE ELECTRIC BOX, LOWER ASSEMBLY UNTIL IT IS HELD IN PLACE.

Figure 4.