

# INSTALLATION INSTRUCTIONS

## IP150 Rear Ice Fill Cover Lock Kit

### SAFETY INSTRUCTIONS

**WARNING:**

Before starting installation, read and understand all safety label and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.

**Failure to comply could result in serious injury, death or damage to the equipment.**

### QUALIFIED SERVICE PERSONNEL

**WARNING:**

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit.

**All wiring and plumbing must conform to national and local codes. Failure to comply could result in serious injury, death or equipment damage.**

### SAFETY PRECAUTIONS

This unit has been specifically designed to provide protection against personal injury. To ensure continued protection observe the following:

**WARNING:**

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

**Failure to comply could result in serious injury, death or damage to the equipment.**

**CAUTION:**

Always be sure to keep area around the unit clean and free of clutter.

**Failure to keep this area clean may result in injury or equipment damage.**

## INSTRUCTIONS

### **⚠ WARNING:**

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

**Failure to comply could result in serious injury, death or damage to the equipment.**

1. Remove rear ice fill cover from unit (see Figure 1).

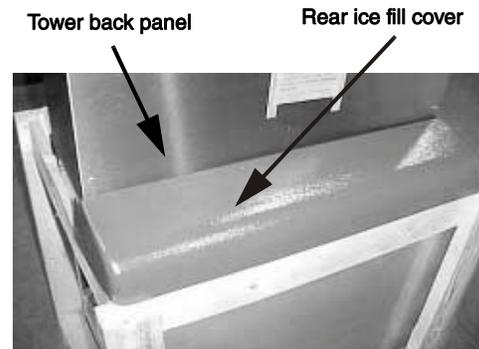


Figure 1.

2. Position side brackets by placing the bracket against the tower back panel, both sides. Be sure that brackets do not interfere with removal of the tower back panel (see Figure 2).
3. Drill 1/8" holes using the brackets as a template (see Figure 2).

### **⚠ IMPORTANT:**

**BE CAREFUL NOT TO DRILL TOO DEEP AS DAMAGE TO HOPPER MAY OCCUR.**

4. Use the screws provided in kit and a Phillips screwdriver, only, to mount brackets to hopper.

### **⚠ IMPORTANT:**

**BE CAREFUL NOT OVER TIGHTEN THE SCREWS.**

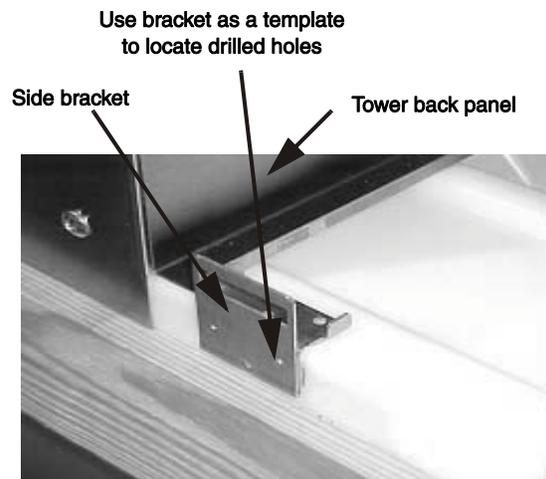


Figure 2.

5. Position key lock bracket on rear hopper lip, as shown in Figure 3 and Figure 4. The bracket is located 15-1/8" from the right side of dispenser.



Figure 3.

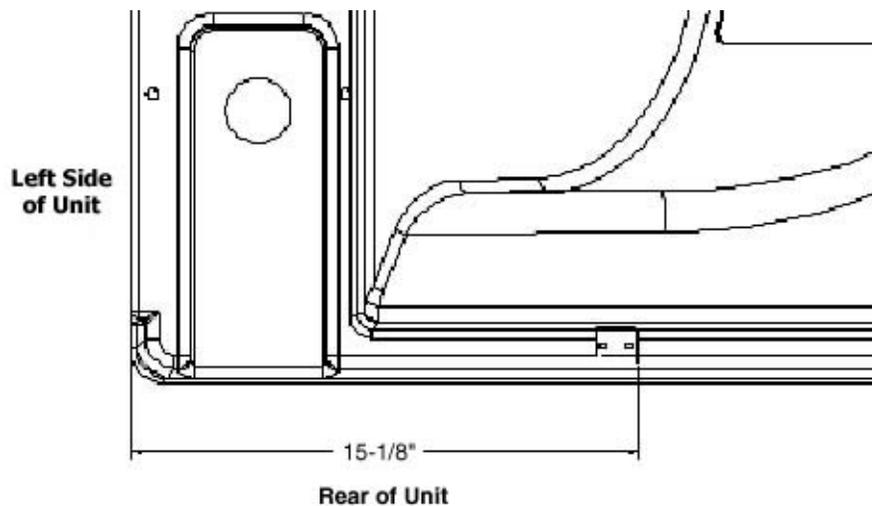


Figure 4. Top View of Dispenser

6. Drill 1/8" holes using the bracket as a template.



**IMPORTANT:**

**BE CAREFUL NOT TO DRILL TOO DEEP AS DAMAGE TO HOPPER MAY OCCUR.**

7. Using a Phillips screwdriver only, use screws provided in kit to mount bracket to hopper.



**IMPORTANT:**

**BE CAREFUL NOT OVER TIGHTEN SCREWS.**

8. Position new rear ice fill cover onto unit by holding the side latches in and placing the rear ice fill lid straight down onto the unit.
9. Be sure that the side latches engage into the side brackets.
10. Turn key lock to the 'locked' position to confirm that cover is locked to unit.
11. To remove rear ice fill cover, turn key to 'unlocked' position, push in side latches and pull up in cover.
12. Check and verify unit operation, beverage dispense, ice dispense, etc.