



INSTALLATION INSTRUCTIONS

Enduro 175, 2XX and 300 Merchandiser/Side Decal Change Out

SAFETY



WARNING:

Before starting installation, read and understand all safety label and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.

Failure to comply could result in serious injury, death or damage to the equipment.

QUALIFIED SERVICE PERSONNEL



WARNING:

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit.

All wiring and plumbing must conform to national and local codes. Failure to comply could result in serious injury, death or equipment damage.

SAFETY PRECAUTIONS

This unit has been specifically designed to provide protection against personal injury. To ensure continued protection observe the following:



WARNING:

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.



CAUTION:

Always be sure to keep area around the unit clean and free of clutter.

Failure to keep this area clean may result in injury or equipment damage.

INSTALLATION INSTRUCTIONS

1. Remove plastic lid from top of unit.
2. Push up on bottom of the merchandiser to disengage retaining hooks from the cabinet on both sides (see Figure 1.)
3. Pull bottom of the merchandiser forward until the top of the merchandiser clears the hopper flange (see Figure 2.)
4. Install new merchandiser in the reverse order. The hooks must be fully engaged in the cabinet and the bottom locating tabs (if applicable) must be seated in the beverage panel.
5. Re-install the lid.
6. Remove the side decals from the unit, as much as possible.
7. Install new side decals over what remains of the old decals.

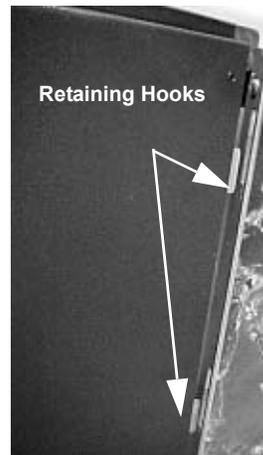


Figure 1.



Figure 2.