

# INSTALLATION INSTRUCTIONS

## ED300 Dual Kit Part No. 629088556

### SAFETY INSTRUCTIONS

 **WARNING:**

Before starting installation, read and understand all safety label and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.

**Failure to comply could result in serious injury, death or damage to the equipment.**

### QUALIFIED SERVICE PERSONNEL

 **WARNING:**

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit.

**All wiring and plumbing must conform to national and local codes. Failure to comply could result in serious injury, death or equipment damage.**

### SAFETY PRECAUTIONS

This unit has been specifically designed to provide protection against personal injury. To ensure continued protection observe the following:

 **WARNING:**

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

**Failure to comply could result in serious injury, death or damage to the equipment.**

 **CAUTION:**

Always be sure to keep area around the unit clean and free of clutter.

**Failure to keep this area clean may result in injury or equipment damage.**

# INSTALLATION

**Table 1: Parts List**


| Item No. | Part No.     | Description                           | Qty.    |
|----------|--------------|---------------------------------------|---------|
| 1        | 620500201    | Gasket, 3/8 in. thick x 1/2 in. width | 150 in. |
| 2        | 50904        | RTV Sealant, 3 Oz. tube               | 1       |
| 3        | 620517402    | Beverage Panel Spacer                 | 1       |
| 4        | 70555        | #8 x 2 5/8 in. Screw                  | 4       |
| 5        | 71010        | #8 Captivating Washer                 | 4       |
| 6        | 620052831    | Bracket Assy Dual Sink                | 1       |
| 7        | 629088556INS | Installation Instructions             | 1       |
| 8        | 620044582    | Panel, Lower Assembly                 | 1       |

**! WARNING:**

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.


**Failure to comply could result in serious injury, death or damage to the equipment.**

1. Apply the adhesive-backed gasket (item 1) to the side of one unit as shown in Figure 1. The ends of the gasket should fit tightly together.

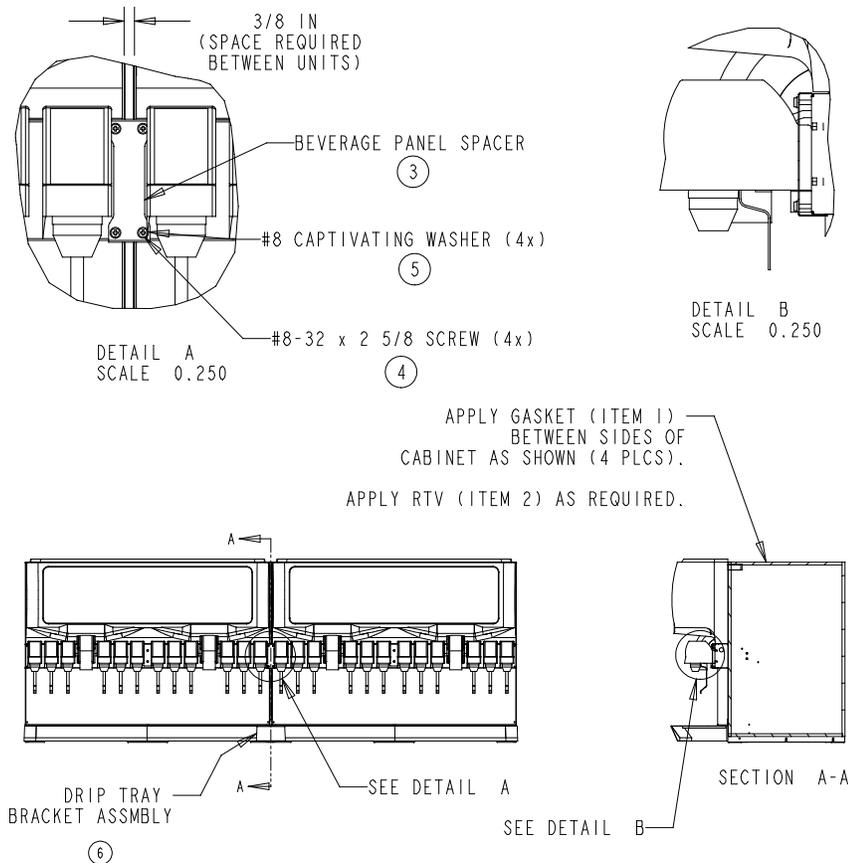

**Figure 1.**

- Position the two dispensers on the counter as shown in Figure 1. The outside-to-outside dimensions of the units should be 89 1/8 in with 3/8 in space between the units. The units must be at the same height and level for the drip tray and lower panel to fit properly. Refer to Figure 2. for bolting units to the counter.

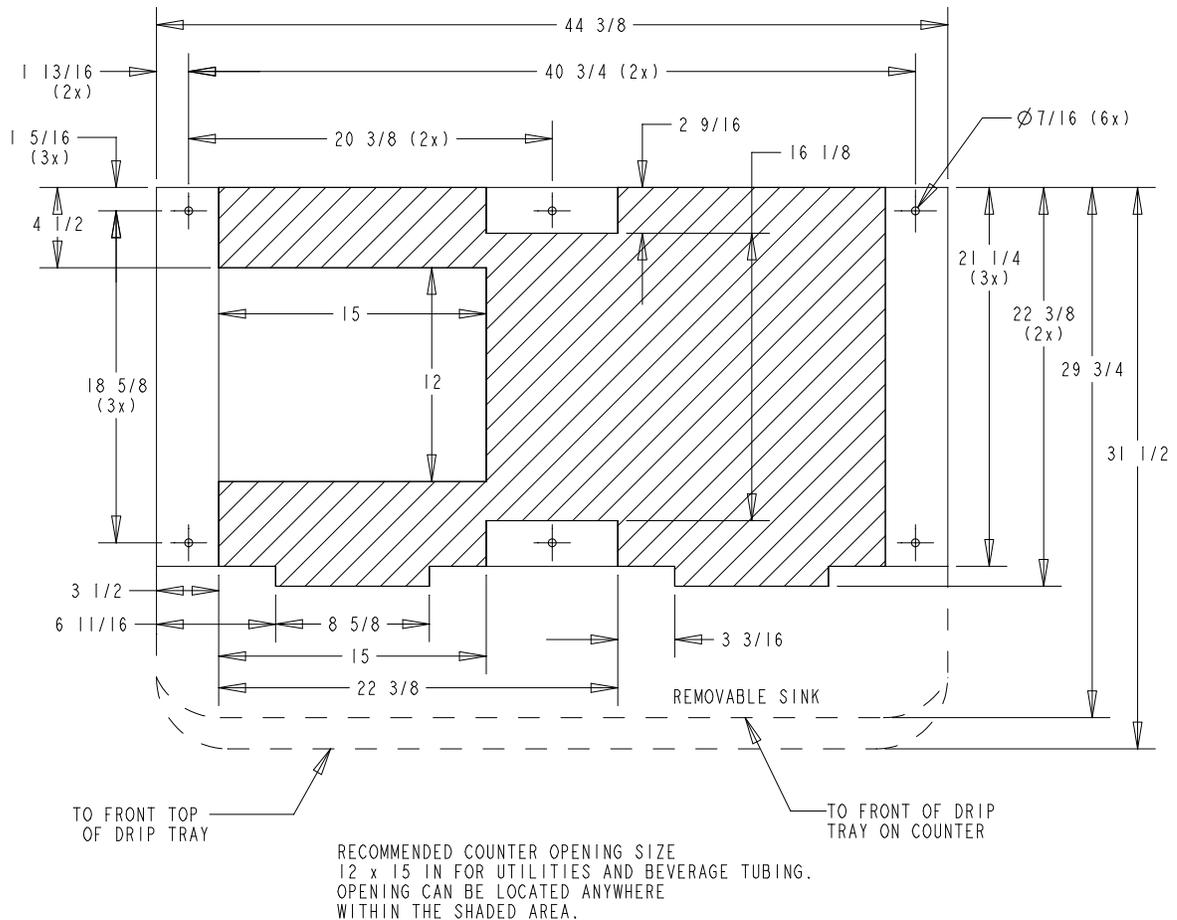

**Figure 2.**

- Install the beverage panel spacer (item 3) at the center of the units as shown in Figure 1. Use the four beverage panel screws (item 4) and washers (item 5) to secure the spacer. Apply the dual-sink bracket assembly (item 6) using the existing panel screws to secure
- Apply RTV (item 2) at the gasket-cabinet joint to seal any gaps between units.
- Route the drain tubing to an open drain with the ends of the tubing secured above the “flood” level of the drain. The drain tubing must pitch continuously downward and contain no “traps”, or improper drainage will result.