

REPLACEMENT INSTRUCTIONS

IDC/NGF Merchandiser

SAFETY

WARNING:

Before starting installation, read and understand all safety label and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.

Failure to comply could result in serious injury, death or damage to the equipment.

QUALIFIED SERVICE PERSONNEL

WARNING:

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit.

All wiring and plumbing must conform to national and local codes. Failure to comply could result in serious injury, death or equipment damage.

SAFETY PRECAUTIONS

This unit has been specifically designed to provide protection against personal injury. To ensure continued protection observe the following:

WARNING:

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.

CAUTION:

Always be sure to keep area around the unit clean and free of clutter. **Failure to keep this area clean may result in injury or equipment damage.**

INSTALLATION INSTRUCTIONS

1. Lift the plastic lid off the top of the dispenser and set aside.
2. Push up the bottom of the merchandiser to disengage the retaining hooks from the cabinet on both sides, See Figure 1.

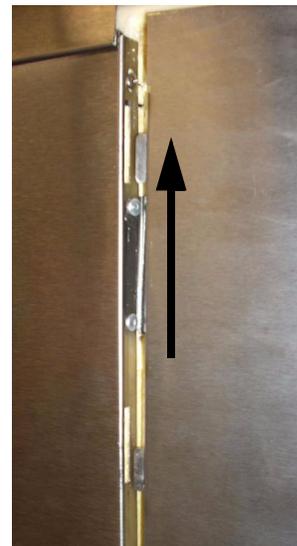


Figure 1.

3. Pull the top of the merchandiser forward until it clears the hopper flange, See Figure 2.
4. Install the new merchandiser. Place the bottom of the merchandiser on the unit and push the top into place. Once the top is in place slide it down to engage the retaining hooks.

NOTE: The retaining hooks must be fully engaged in the cabinet and the bottom locating tabs, if applicable, must be seated in the valve panel.

5. Replace the lid on top of the dispenser.



Figure 2.

6. Remove the translight (graphic) from the old merchandiser by releasing each of the 4 tabs from the corners of the merchandiser and install it on the new merchandiser.

NOTE: The translight is installed from the front of the installed merchandiser, see Figure 3. No tools are required to change the translight.

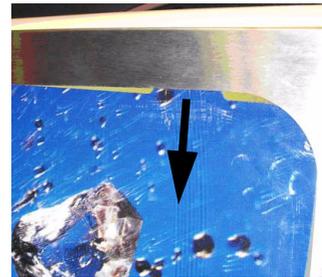


Figure 3.