

# ADA HANDLE INSTALLATION INSTRUCTIONS

**⚠ WARNING:**

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

**Failure to comply could result in serious injury, death or damage to the equipment.**


BILL OF MATERIAL			
ITEM	QTY.	PART NO.	DESCRIPTION
1	1	620055277	ADA Handle
2	1	620055973	Ball Pin
3	1	629097127INS	ADA Handle Installation Instructions
4	1	629097127	Kit Viper ADA SPH Handle Retrofit

1. This procedure may be performed while the unit is running, but spillage may occur when removing the old handle and attaching the new one. It is recommended that the barrel be depressurized before starting this procedure.

2. Use a pair of gas pliers to rotate and pull the old handle off of the valve stem.



3. Press the new ADA handle down onto the valve stem. Make sure the handle is properly seated all the way down on the valve stem.

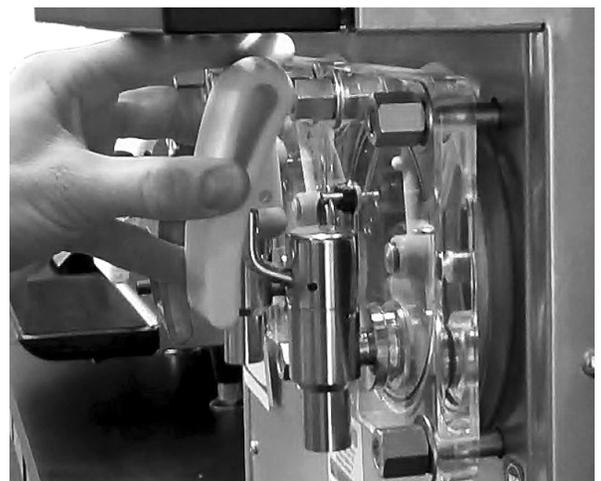

4. Insert the retainer pin into the side of the ADA handle until it snaps into place.



5. Verify that the pin is completely inserted into the handle.



6. The system is now ready for normal operation.  
If the pin needs to be removed, push on the spring ball end of the pin with a screwdriver.