

INSTALLATION INSTRUCTIONS

ELBOW / TRANSFER TUBE

WARNING:

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.

INSTALLATION



Figure 1. Install elbow and transfer tube.

1. Install elbow on icemaker, make sure the elbow engages the safety switch located on the icemaker.
2. Insert the ice transport tube into the bin.
3. Move icemaker into position and then press the tube into the elbow. Align the $\frac{1}{4}$ - 20 screw in the elbow with the locking hole on the transport tube.
4. Tighten screw to lock tube on elbow.

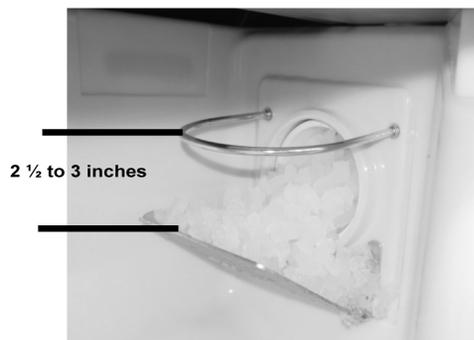


Figure 2. Bin Thermostat Well

The bin thermostat well should be 2 ½ to 3 inches above the ice deflector if either is bent during installation bend back too proper position (See Figure 2).

THERMOSTAT ADJUSTMENT

The bin thermostat is set at the factory and should not require adjustment. The icemaker should shut off when the ice is in contact with 4 to 6 inches of the thermostat well. If the thermostat requires adjustment, locate it in the dispenser electrical box. It can be accessed from the side of the bin between the icemaker and the bin.