


INSTALLATION INSTRUCTION

SOLENOID ASS'Y REBUILDING KIT

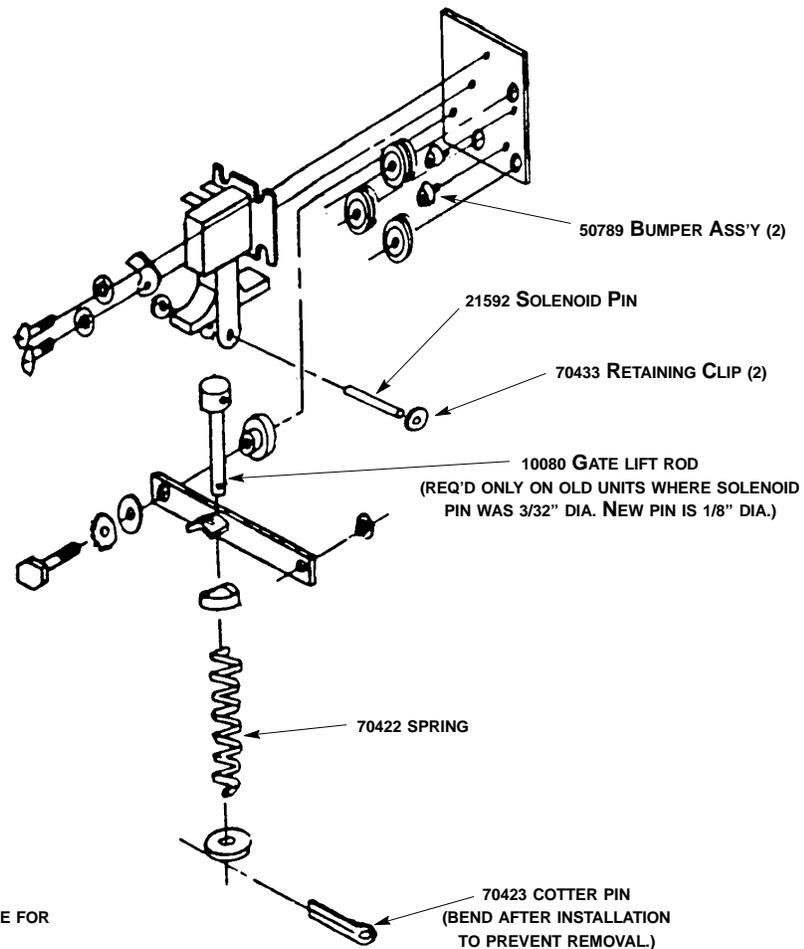

* LUBRICATE WITH GENERAL PURPOSE GREASE FOR MAXIMUM LIFE UNDER HEAVY USE.

1. Install parts as shown. DO NOT REMOVE SOLENOID.
2. If plunger is removed from solenoid body, reinstall in the same position. Reversing plunger may cause noisy operations.
3. If solenoid position is accidentally shifted, or if loose, realign as shown on unit wiring diagram and in instruction manual.
4. Check all fasteners for tightness, and test for proper operation.