

INSTALLATION INSTRUCTIONS

Sabre Style Front Cover Water or Soda Option FFV and SEV Valves

SAFETY INSTRUCTIONS

**WARNING:**

Before starting installation, read and understand all safety label and warnings on the machine. Also review and understand all safety instructions in the owners, installation and service manuals.

Failure to comply could result in serious injury, death or damage to the equipment.

QUALIFIED SERVICE PERSONNEL

**WARNING:**

Only trained and certified electrical, plumbing and refrigeration technicians should service this unit.

All wiring and plumbing must conform to national and local codes. Failure to comply could result in serious injury, death or equipment damage.

SAFETY PRECAUTIONS

This unit has been specifically designed to provide protection against personal injury. To ensure continued protection observe the following:

**WARNING:**

Disconnect power to the unit before servicing. Follow all lock out/tag out procedures established by the user. Verify all power is off to the unit before performing any work.

Failure to comply could result in serious injury, death or damage to the equipment.

**CAUTION:**

Always be sure to keep area around the unit clean and free of clutter.

Failure to keep this area clean may result in injury or equipment damage.

KIT NUMBERS 82606-012 AND 82606-013

1. Turn off the power to the dispenser valves.
2. Remove the front cover from the valve.
3. Remove the rear cover by loosening the screw at the front top portion of the rear cover and lifting up on the rear cover.
4. If the valve has a water only wiring harness, proceed to Step 6.
5. Remove the wiring harness and install the new wiring harness (provided in kit) on the solenoids as shown in the figure on Page 2.
6. Connect the wires from the wiring harness to the front cover switch as shown in the figure on Page 2.
7. Fasten tywrap (provided in kit) around switch wires and mounting base as shown in figure on Page 2.
8. Place the rear cover on the valve and tighten the screw at the front of the rear cover.
9. Place the front cover on the valve being careful not to crimp any wires between covers.
10. Reconnect the power to the dispenser.

NOTE: Press the buttons and check the operation of both switches on the valve. If the valve fails to operate, check the switch and the valve wiring connections for any errors. If the valve turns on without pushing the button, then one of the switches is wired wrong and the connections must be checked for errors.

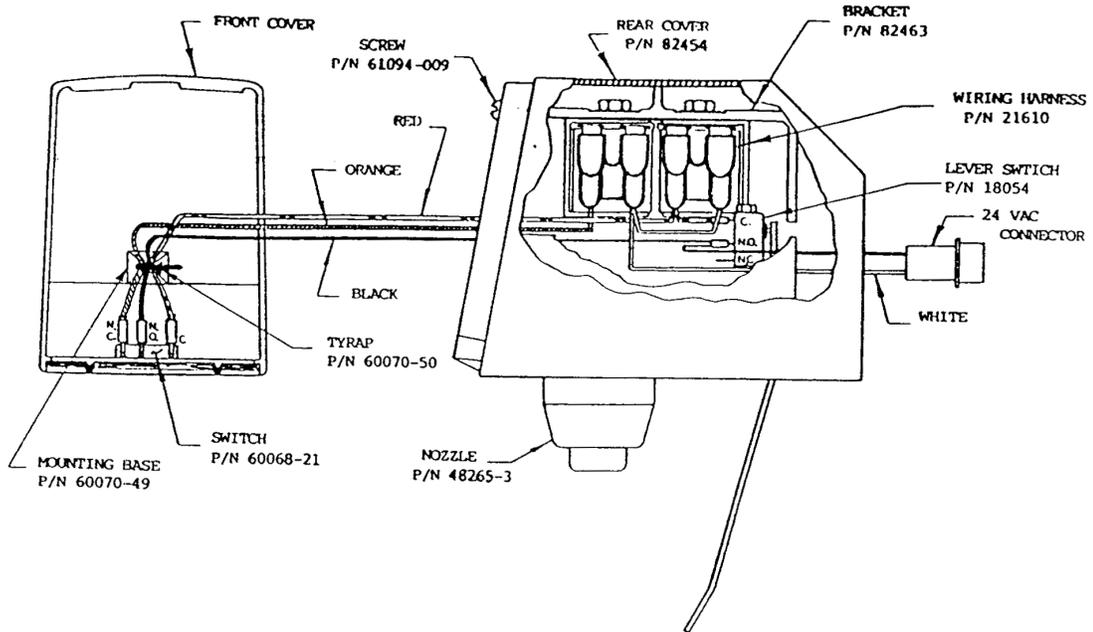


Figure 1. FFV Valve Assembly

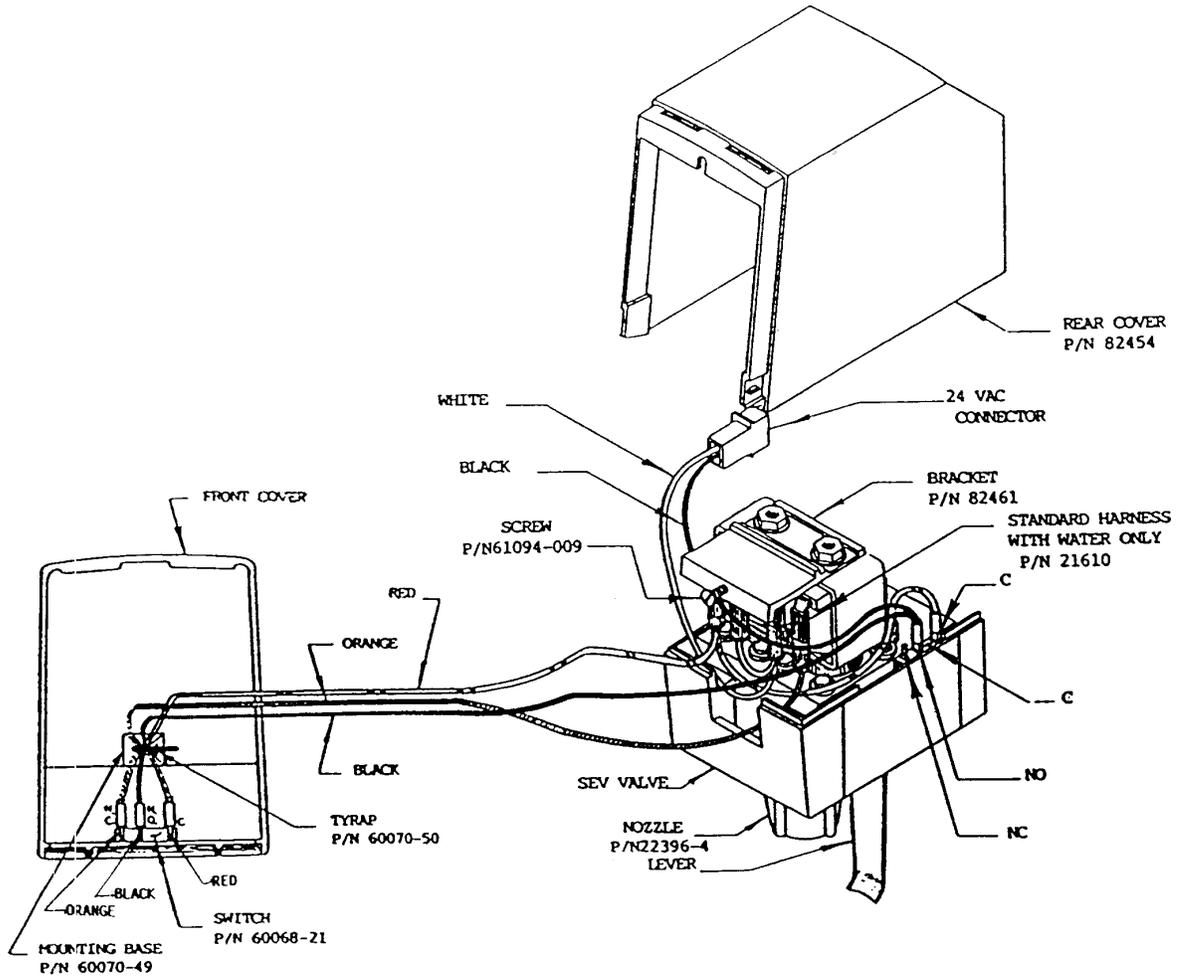


Figure 2. SEV Valve Assembly