
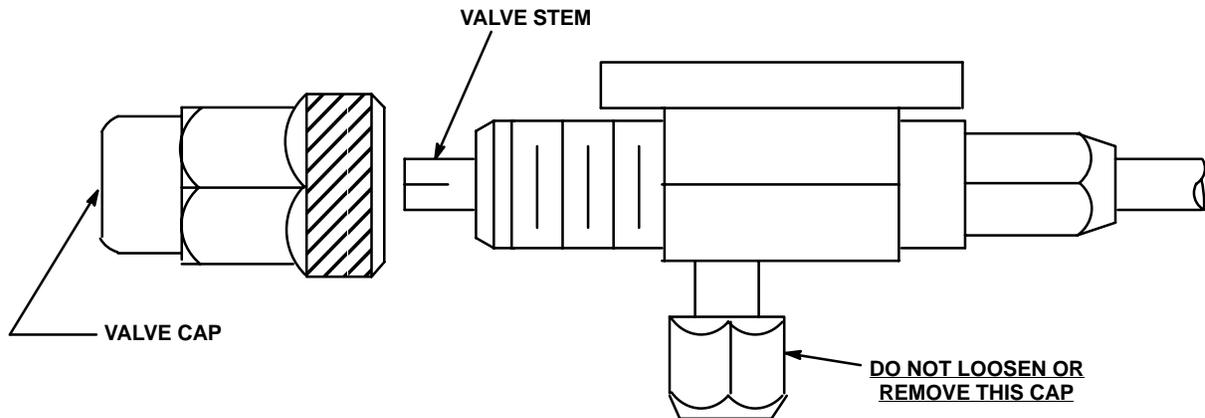


INSTALLATION INSTRUCTION

FOR COMPRESSOR START-UP PROCEDURE

MODELS:
B4000-72
DC10-72
R11-72
R25-72

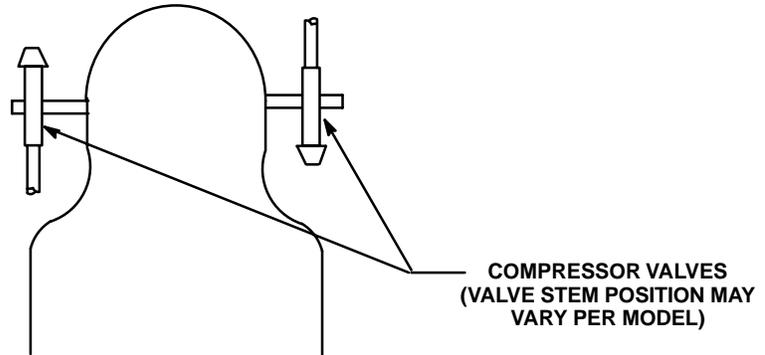

PROCEDURE

1. Remove valve caps from taggd discharge and suction valves on compressor.
2. Turn valve stem counterclockwise until it stops snugly.
3. Replace valve cap securely. Unit is now ready for operation. Be sure power supply is same as shown on name plate.