



IMI CORNELIUS INC.
One Cornelius Place
Anoka, MN 55303-6234
Telephone (800) 238-3600
Facsimile (612) 422-3246


INSTALLATION INSTRUCTIONS

KIT, P/N 2318

For installing Hoshizaki Model KM450, 500, & 630 Series Ice Makers on Remcor™ Model DB200 Series Ice/Drink dispenser.

Note: Ice maker can be installed on the right or left side of the dispenser for manual fill requirements.

1. Seal the ice maker to the top of the dispenser as follows;
 - A. Apply a bead of RTV on the dispenser cover around the outline of the ice maker and inside edge of the cover opening. (Front, rear & side).
 - B. Set the ice maker onto the cover and position as shown (see note).
 - C. Wipe away excess RTV.
2. Secure the ice maker to the dispenser with the mounting brackets as shown. Drill holes and install sheet metal screws provided into the ice maker cabinet and the dispenser cover. Screws must not interfere with any ice maker components.
3. Install adhesive backed gasket strip to the removable lid.
4. Follow the manufacturers directions to complete the installation of the ice maker.

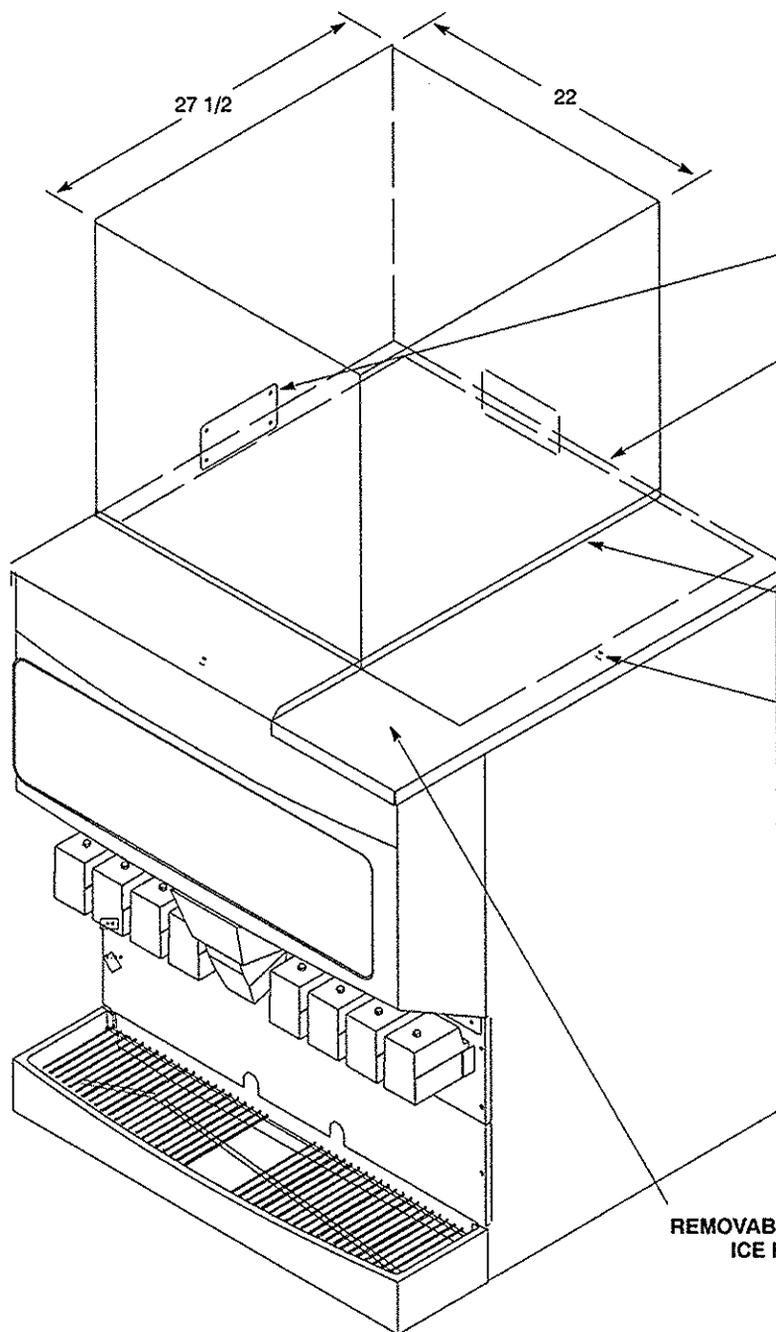

NOTE: ICEMAKER CAN BE INSTALLED ON OPPOSITE SIDE, IF LEFT SIDE MANUAL FILL IS REQUIRED.

FLAT MOUNTING BRACKETS (SEE NOTES)

APPLY RTV AROUND INSIDE OF ICEMAKER OUTLINE ON DISPENSER COVER TO FORM A SEAL.

ADD ADHESIVE BACKED GASKET STRIPS TO REMOVABLE LID.

NO. 8-32 THUMB SCREW

NOTE: USE MOUNTING BRACKET AS TEMPLATE, DRILL (4) .136 DIA. HOLES INTO ICEMAKER CABINET FOR SHEET METAL SCREWS PROVIDED. DRILLING IS NOT TO INTERFERE WITH ICEMAKER COMPONENTS. (2 PLCS.)

REMOVABLE SIDE LID FOR MANUAL ICE FILLING. (SEE NOTE)