



IMPULSE™ 1

POST-MIX COUNTER ELECTRIC DISPENSER



FEATURES



Consistency - Built-in cold carbonator produces bottle-quality drinks every time

Low maintenance - No seasonal CO₂ adjustment required for changes in water temperature

Easy Install - A complete system for simplified installation

Value - Reduces service frequency and lowers equipment life cost

Quality - Generates increased beverage sales and greater consumer satisfaction

Merchandising - Large, bold graphic panels convey a powerful Pepsi merchandising message


Reliability - Designed for performance, reliability and easy serviceability

Service - For ease of service the Impulse™ line has common components across all units around the world

Accessibility - Critical components such as the valves, pump and motor, carbonator tank and ice bank control are easily accessible for service

Flexibility - Easy carb non-carb flexibility with new manifold



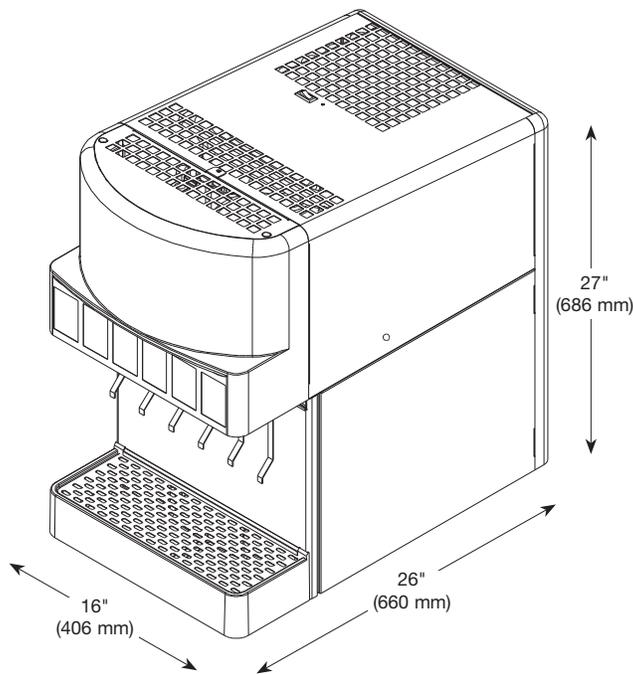

PART NUMBER	DESCRIPTION
851000113	Impulse™ 1, IntelliCarb, 6 UF-1 Valves, 3.0 oz., Lever, Carb/Non-Carb Manifold: 3-2-1, 115V / 60Hz
851000133	Impulse™ 1, IntelliCarb, 6 UF-1 Valves, 3.0 oz., Lever, Lighted Merchandiser, Carb/Non-Carb Manifold: 3-2-1, 115 V / 60 Hz
851000153	Impulse™ 1, IntelliCarb, 6 UF-1 Valves, 3.0 oz., Optifill, Carb/Non-Carb Manifold: 3-2-1, 115V / 60Hz
851000173	Impulse™ 1, IntelliCarb, 6 UF-1 Valves, 3.0 oz., Optifill, Lighted Merchandiser, Carb/Non-Carb Manifold: 3-2-1, 115 V / 60 Hz
851000193	Impulse™ 1, IntelliCarb, 6 UF-1 Valves, 3.0 oz., Push Button, Carb/Non-Carb Manifold: 3-2-1, 115 V / 60 Hz
851000213	Impulse™ 1, IntelliCarb, 6 UF-1 Valves, 3.0 oz., Push Button, Lighted Merchandiser, Carb/Non-Carb Manifold: 3-2-1, 115 V / 60 Hz
851000233	Impulse™ 1, IntelliCarb, 6 UF-1 Valves, 3.0 oz., Portion Control, Carb/Non-Carb Manifold: 3-2-1, 115 V / 60 Hz
851000132	Impulse™ 1, IntelliCarb, 5 UF-1 Valves, 3.0 oz., Lever, Lighted Merchandiser, Carb/Non-Carb Manifold: 3-2-1, 230 V / 50 Hz
851000114	Impulse™ 1, IntelliCarb, 6 UF-1 Valves, 3.0 oz., Lever, Carb/Non-Carb Manifold: 3-2-1, 230 V / 50 Hz
314744000	Impulse™ Legs (1 each)
850000186	Back Decal

TECHNICAL SPECIFICATIONS

TYPE OF VALVES UF-1 3 oz
 (88.8 mL)/sec post-mix
NUMBER OF VALVES 5 or 6
REFRIGERANT R-134a
ELECTRICAL REQUIREMENTS .. 120 V / 60 Hz
 240 V / 50 Hz / 60 Hz
CONTINUOUS DRINK CAPACITY 2.5–12 oz (355mL)
 drinks/min @ 75°F (24°C)
 ambient

PEAK DRINK CAPACITY 217 12 oz (355 mL)
 drinks/min @ 75°F (24°C)
 ambient
CUP CLEARANCE 10.75" (260 mm)
COMPRESSOR 1/3 HP / 248 W
WATER BATH SIZE 17 gal (64.4 L)
ICE BANK SIZE 30 lb (13.6 kg)
SHIPPING WEIGHT 136 lb (61 kg)
 6 UF-1, integral carb

AGENCY LISTINGS   

Pepsi and IntelliCarb are registered trademarks of Pepsi Co, Inc.



© 2014 CORNELIUS CATP8659-0314

IN THE U.S.A.
 Ph: 800.238.3600
 Fax: 800.258.0255

OUTSIDE THE U.S.A.
 Ph: 763.488.8200
 Email: webmaster@cornelius.com

101 Broadway Street West
 Osseo, MN 55369
 www.cornelius.com

For more information or to place an order, contact your sales representative or authorized distributor.