

200H LIFT SERIES

Lightweight
tactical mast with fast
mechanical lift system

HEAVY PAYLOADS

FAST MECHANICAL LIFT SYSTEM

PRIMARY USE

Tactical RF Communications
UAS / cUAS
Wireless Data
Video Surveillance



BLUESKYMAST.COM

sales@blueskymast.com

Call: 877-411-6278 | Fax: 866-411-6278

2080 Wild Acres Road, Largo, FL 33771

SPECIFICATIONS

Model Heights Available
2 to 15 meters (7.5ft to 46.5 ft)

Payload Capacity
See Capabilities Chart*

Wind Loading
70 mph

Deployment Time
1 to 2 people, 2 to 30 minutes*

Outside Diameter
2.0 inches

Testing
MIL-STD-810H

CAPABILITIES CHART

The payload is the total weight of all devices, accessories and cabling being mounted on the mast.

SYSTEM P/N	SYSTEM HEIGHT		PAYLOAD	
	FEET	METERS	LBS	KG
200H-W-L215-BSM-HRD	46.5	(15M)	20	(9.1)
200H-W-L214-BSM-HRD	43.5	(14M)	25	(11.3)
200H-W-L213-BSM-HRD	40.5	(13M)	30	(13.6)
200H-W-L212-BSM-HRD	37.5	(12M)	35	(15.9)
200H-W-L211-BSM-HRD	34.5	(11M)	40	(18.1)
200H-W-L210-BSM-000	31.5	(10M)	50	(22.7)
200H-W-L209-BSM-000	28.5	(9M)	52.5	(23.8)
200H-W-L208-BSM-000	25.5	(8M)	55	(24.9)
200H-W-L207-BSM-000	22.5	(7M)	57.5	(26.1)
200H-W-L206-BSM-000	19.5	(6M)	60	(27.3)
200H-W-L205-BSM-000	16.5	(5M)	65	(29.5)
200H-W-L204-BSM-000	13.5	(4M)	70	(31.8)
200H-W-L203-BSM-000	10.5	(3M)	85	(38.6)
200H-W-L202-BSM-000	7.5	(2M)	100	(45.4)

FEATURES



Patented tripod design with
cam lock system




Self-breaking winch for easy
deployment and recovery of the
mast



Lightweight 2in. OD
interlocking mast sections



Color coded, free spinning guy
rings for directional control

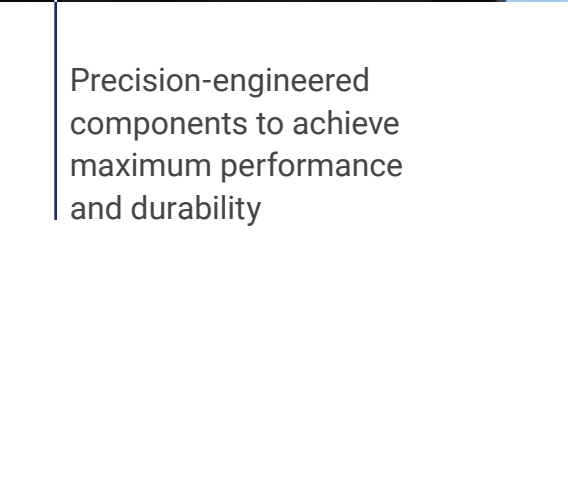

Precision-engineered
components to achieve
maximum performance
and durability



Three bubble levels

Telescoping tripod legs

TRANSPORT

(Included)

The 200H Lift Series system packs down into one custom 54 x 14 x 14 inch wheeling carry bag.



(Optional)

Hard Case Upgrade

62 x 21 x 14 inches

