



SD-10031/32/35

EMERGENCY BACKUP UNIT - STEEL

DESCRIPTION

- White powder coated steel housing
- Super bright and long lasting LEDs
- Universal AC input voltage 120V/277V /347V
- Test switch and AC-ON indicator
- Universal Mounting: Wall/Ceiling/Side Mounting
- Combo heads adjustable 2 * 2W
- 120 Mins. battery backup time
- Suitable for damp locations
- Overcharge and over-discharge protection
- Operating temperature: 10°C ~ 40°C/50°F ~ 104°F
- Remote heads compatible*
- Wire connexions provided for remote load (10031)
- 1-Year Warranty
- ULc Certified to C22.2-NO141-10

Comes standard with 3 pictogram legends for direction selection (single / double face)



*Remote Add-ons



SD-10195
SD-10029



SD-10196
SD-10030

BACKUP TIME

120

MINUTES APPROX.

RECHARGE TIME

36/72/150


HOURS

KEY FEATURES

Product Code	SD-10031	SD-10032	SD-10035
Description	Battery unit 36W	Battery unit 72W	Battery unit 150W
Light Source	SMD 2835 (6pcs)	SMD 2835 (6pcs)	SMD 2835 (6pcs)
Input Voltage	AC120/277/347V, 50/60Hz, 100mA	AC120/277/347V, 50/60Hz, 160mA	AC120/277/347V, 50/60Hz, 200mA
Input Power	9W	15W	21W
Emergency Power	4W - 10W	4W - 10W	4W - 10W
LED Heads	2*2W / 2*5W	2*2W / 2*5W	2*2W / 2*5W
Luminance Flux	≥260lm / ≥700lm	≥260lm / ≥700lm	≥260lm / ≥700lm
Emergency Duration	Up to 120 Minutes	Up to 120 Minutes	Up to 120 Minutes
Battery	Lead Acid Battery 6V, 7Ah	Lead Acid Battery 12V, 7Ah	2pcs * Lead Acid Battery 6V, 12Ah
DC Volts	6V	12V	12V
Recharge Times	24 Hrs	24 Hrs	24 Hrs
Remote Capable	10W(120Mins) 12W(90Mins) 36W(30Mins)	10W(120Mins) 12W(90Mins) 36W(30Mins)	10W(120Mins) 12W(90Mins) 36W(30Mins)
Max. Mounting Height	16.1 ft (4.8m)	16.1 ft (4.8m)	15.1 ft (4.7m)
Instruction Sheet	VIEW	VIEW	VIEW



SD-10031

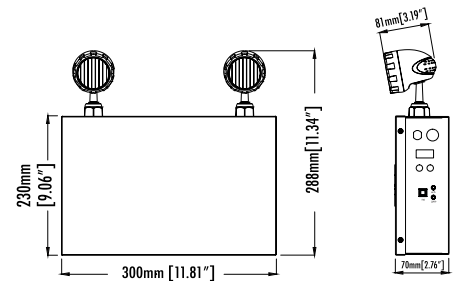

SD- 10032
SD- 10035

