


PDB SPECIFICATIONS

| | |
|-------------------------|---|
| Maximum Peak Current | 300 A |
| Voltage Range | 6 s -14 s |
| External Voltage Levels | 12 V - 5 V |
| Connector 1 | 4 - " XT 60 Connectors [Female] |
| Connector 2 | 6 - " XT 60 Connectors [Right Angle Male] |
| Connector 3 | 2 - " XT 30 Connectors [Right Angle Female] |
| Voltage Measurement | [0 - 100 V] Analogue Output x mV/V |
| Current Measurement | [0 - 100 V] Analogue Output y mV/V |
| BEC 1 | DC - DC 5 V - 2 A Continuous |
| BEC 2 | DC - DC 12 V - 2 A Continuous |
| Max Temperature | 180 ° C |
| Weight | 160 ± 2 grams |
| Mounting | 102 mm x 49 mm |
| Size | 110 mm x 116 mm x 20 mm [L x B x H] |
| Input Connectors | Customisable [Lugs or Wires] |

2D Drawings

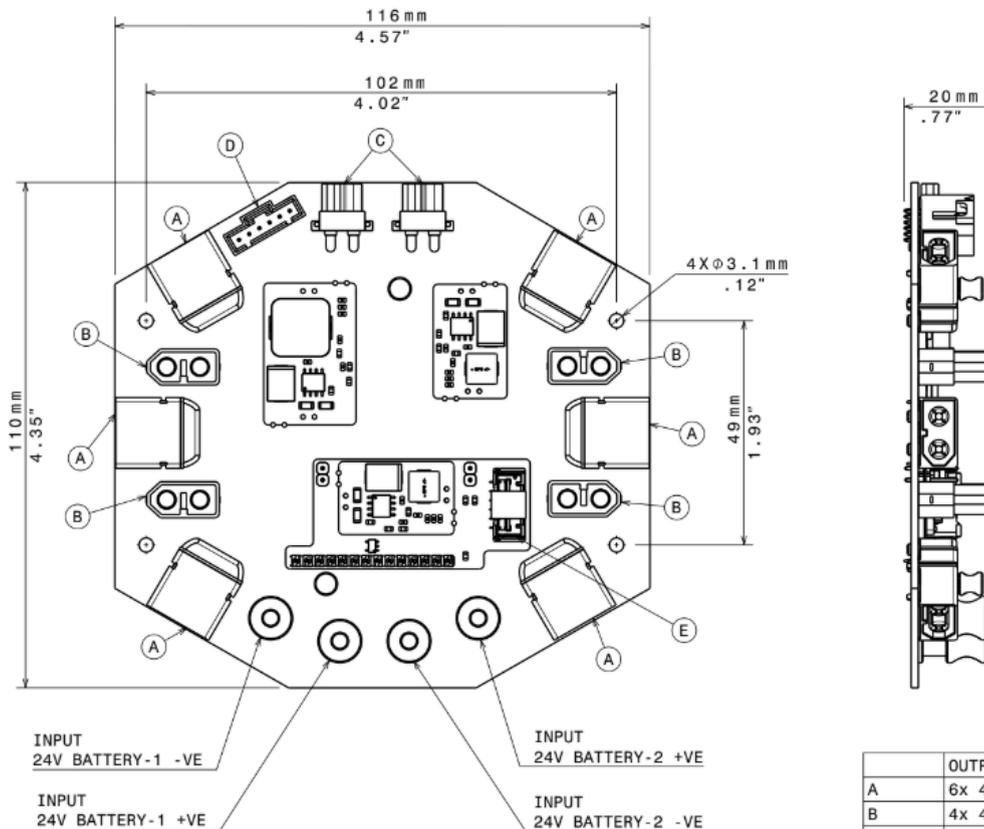

| | OUTPUT |
|---|------------------------------|
| A | 6x 48V DC XT-60 MALE |
| B | 4x 48V DC XT-60 FEMALE |
| C | 2x 24V DC XT-30 FEMALE |
| D | 5V & 12V |
| E | 5V / VOLTAGE & CURRENT SENSE |

Note: Specifications and drawings may be revised without notice. Vector Technics assumes no liability for reliance on unverified data.
 All Dimensions in millimeters [mm]