IPGS-0101T (12V/48V)

Industrial Gigabit Injector with PoE 802.3at/af up to 30W



OVERVIEW

The Lantech IPGS-0101T is an Industrial high power PoE Gigabit Injector that can feed up to 30W under 802.3at/af standard.

Lantech IPGS-0101T is fully compliant with IEEE 802.3at/af standard. The 12V model can take 9.5~56VDC input voltage for PoE feeding up to 30W which is suitable for vehicle application.
Lantech IPGS-0101T is the best industrial PoE Gigabit Injector for outdoor IP CAM, PTZ, heater, wireless AP etc.

Hardened industrial design with extended temperature range; CE, FCC, LVD, AREMA** part 11.5.1 compliance
It provides ±2000V EFT and ±6000V ESD protection, which can reduce unstable situation caused by power line and Ethernet. It has high reliability and robustness coping with extensive EMI/RFI phenomenon, environmental vibration and shocks usually found in Automation, transportation, surveillance, Wireless backhaul, Semi-conductor factory and assembly lines.

With CE, FCC, LVD and AREMA** part 11.5.1 verification, Lantech IPGS-0101T is best for outdoor community, vehicle, railway, process control automation etc. For more usage flexibilities, IPGS-0101T-E supports wide operating temperature from -40°C to 75°C.

DIMENSIONS (unit=mm)

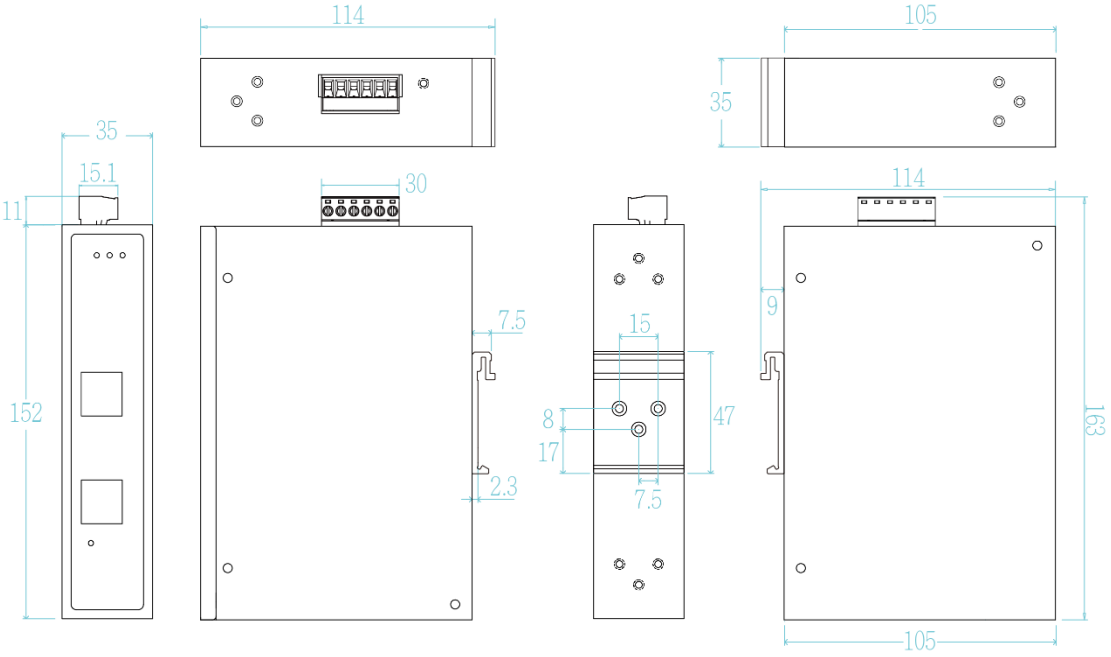

SPECIFICATION

Standards	IEEE802.3 10Base-T IEEE802.3u 100Base-TX/100Base-FX IEEE802.3ab 1000Base-T IEEE802.3x Flow Control and Back pressure IEEE802.3at/af PoE/PSE
Switch Architecture	Store and Forward
Connectors	RJ-45 socket x 2 Power & Relay** connector: 1 x 6-pole terminal block
Network Cable	10Base-T: UTP/STP Cat. 3, 4, 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: UTP/STP Cat. 5/ 5E/ 6 cable EIA/TIA-568 100-ohm (100m)
PoE pin assignment	Positive (VCC+): RJ-45 pin 1,2. Negative (VCC-): RJ-45 pin 3,6.
LED	PW1 (Green); PW2 (Green); FAULT (Red)
Power Supply	Input Voltage: 44V ~ 56VDC (48V model) Input Voltage : 9.5V ~56VDC (12V model)
Power Consumption	5 Watts max.
PoE Budget	30W (50-57VDC input is recommended for 802.3at 30W applications) Higher PoE budget can be applied upon request. **

Polarity protection	Power polarity protection
Relay Alarm**	Provides one relay output for power fail alarm. Alarm Relay current carry ability: 1A @ DC24V
Operating Humidity	5% ~ 95% (Non-condensing)
Operating Temperature	-20°C~60°C /-4°F~140°F (standard model) -40°C~75°C / -40°F~167°F (E model)
Storage Temperature	-40°C~85°C / -40°F~185°F
Case Dimension	Metal case. 35 (W) x 105 (D) x 152 (H) mm
Installation	DIN Rail and Wall Mount* Design
EMI & EMS	FCC Part 15 Class A IEC/EN61000-6-2 CE EN55032 Class A CE EN55024: CE EN61000-4-2 (ESD) Level 3 CE EN61000-4-3 (RS) Level 3 CE EN61000-4-4 (EFT) Level 3 CE EN61000-4-5 ED3 (Surge) Level 3 CE EN61000-4-6 (CS) Level 3 CE N61000-4-8 (Magnetic field) Level 3 AREMA** part 11.5.1 compliance
Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
MTBF	TBC (standards: IEC 62380)
Warranty	5 years

**Optional

ORDERING INFORMATION

Optional AREMA certified models are available with –AMA model names.

- **IPGS-0101T-12V……P/N: 8350-046**
  1x 10/100/1000T PoE Injector up to 30W, 9.5V~56VDC dual input; Operating Temperature -20°C to 60°C
- **IPGS-0101T-12V-E……P/N: 8350-047**
  1x 10/100/1000T PoE Injector up to 30W, 9.5V~56VDC dual input; Operating Temperature -40°C to 75°C
- **IPGS-0101T-48V……P/N: 8350-048**
  1x 10/100/1000T PoE Injector up to 30W, 44V~56VDC dual input; Operating Temperature -20°C to 60°C
- **IPGS-0101T-48V-E……P/N: 8350-049**
  1x 10/100/1000T PoE Injector up to 30W, 44V~56VDC dual input; Operating Temperature -40°C to 75°C

OPTIONAL ACCESSORIES

DIN Rail Power

NDR-75 Series	75W Single Output Industrial Din Rail Power; 90-264VAC / 127-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 2.5% per degree from 50°C ~ 70°C; For 115VAC, please refer to derating curve on NDR-120 Series datasheet)
MDR-40 Series	40W Single Output Industrial Din Rail Power; 85-264VAC / 120-370VDC Input Range; Cooling by free air convection; RoHS2 ; Operating Temp. -20°C~70°C (ambient, derating each output at 4% per degree from 60°C ~ 70°C)

Lantech Communications Global Inc.

www.lantechcom.tw
info@lantechcom.tw

© 2022 Copyright Lantech Communications Global Inc. all rights reserved. Updated on 16 APR 2026
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.