

APP Control



Voice Function



Timing Function



Share Device

# SMART HOME 2025



CHIMANLAL VADILAL AND COMPANY

[www.cvclumilife.com](http://www.cvclumilife.com)



# CONTENTS



Smart Door Lock	01 - 16
Smart Module Switch	17 - 20
Smart Thermostat Valve	21 - 30
Smart Control Panel	31 - 34
Smart Sensor	35 - 48
Smart Gateway	49 - 50
Smart Camera	51 - 72
Smart Power Strip	73 - 86
Smart Plug	87 - 100
Wifi Smart Switch	101 - 118



# S1

Quick access with fingerprint with low false recognition rate, good for old man or kids



## Keyless Smart Cylinder

No breaking the door or change the door body.

### MSL-S1



#### Product Parameters

Reader Dimension:	42x42mm
Power Source:	1 x CR123A(Alkaline)
Material:	Aluminum Alloy/Brass
Installation:	Intermediate,Tools required(Included)
Unlock Way:	App,Fingerprint,Keycard,Manual key
IP Class:	IP5x(Dust and Splash Proof)
Emergency Power:	1x Micro Type-C charging port
Door Thickness:	35-45mm

#### Dimension



#### 4 Ways to unlock



Fingerprint


IC Card

Tuya APP

Key



Show the situation outside the door




# Camera Smart Lock

ME-098


### CAMERA SMART LOCK

- Infrared camera**  
Hd electronic eye
- Indicator light**
- Doorbell function**  
Door bell rings, inside owner can check outside visitors by camera
- Key unlock and power charge for any emergency use**  
The cylinder will unlock the lock mortise directly. If it is power failure problem, use the emergency power recharge port to start the lock again.



### PRODUCT PARAMETERS

Model:	E908
Material:	Curved tempered glass aluminum alloy
Color:	● Black
Unlock Way:	Fingerprint/Password/card//APP/key
Cylinder:	C Level
Power Supply:	8 AA batteries
Available Door:	Wood door/Security door /Bronze door/Iron door
Available Thickness:	40MM-80MM
Unlock Direction:	Universal for left/right
Lock Size/with rubber:	370*75mm/373x78mm

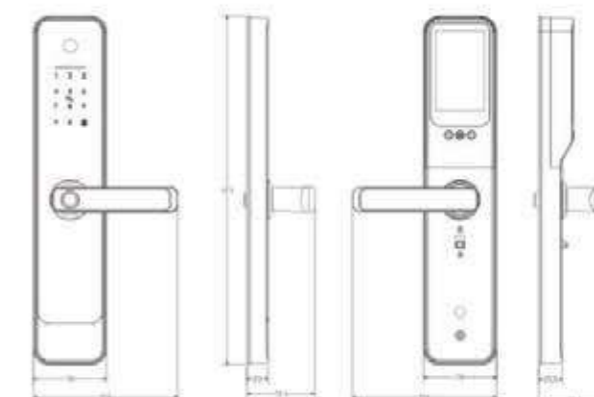



# Smart Lock

M-HY03

### Features:



- \* Front panel size: 420mm × 76mm × 65mm
- \* Rear panel size: 420mm × 76mm × 65mm
- \* Suitable door thickness: 40-120mm
- \* Material: carbon steel+aluminum alloy
- \* Process: Electric spray
- \* Painting Color: matte black
- \* Key type: capacitive touch screen
- \* Key material: tempered glass





# Smart Lock

M-H168

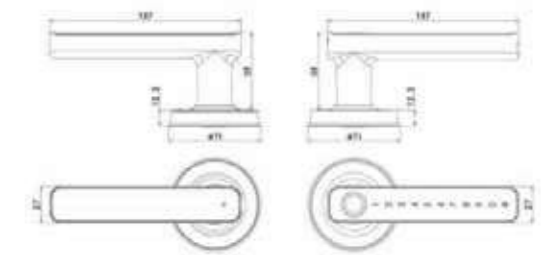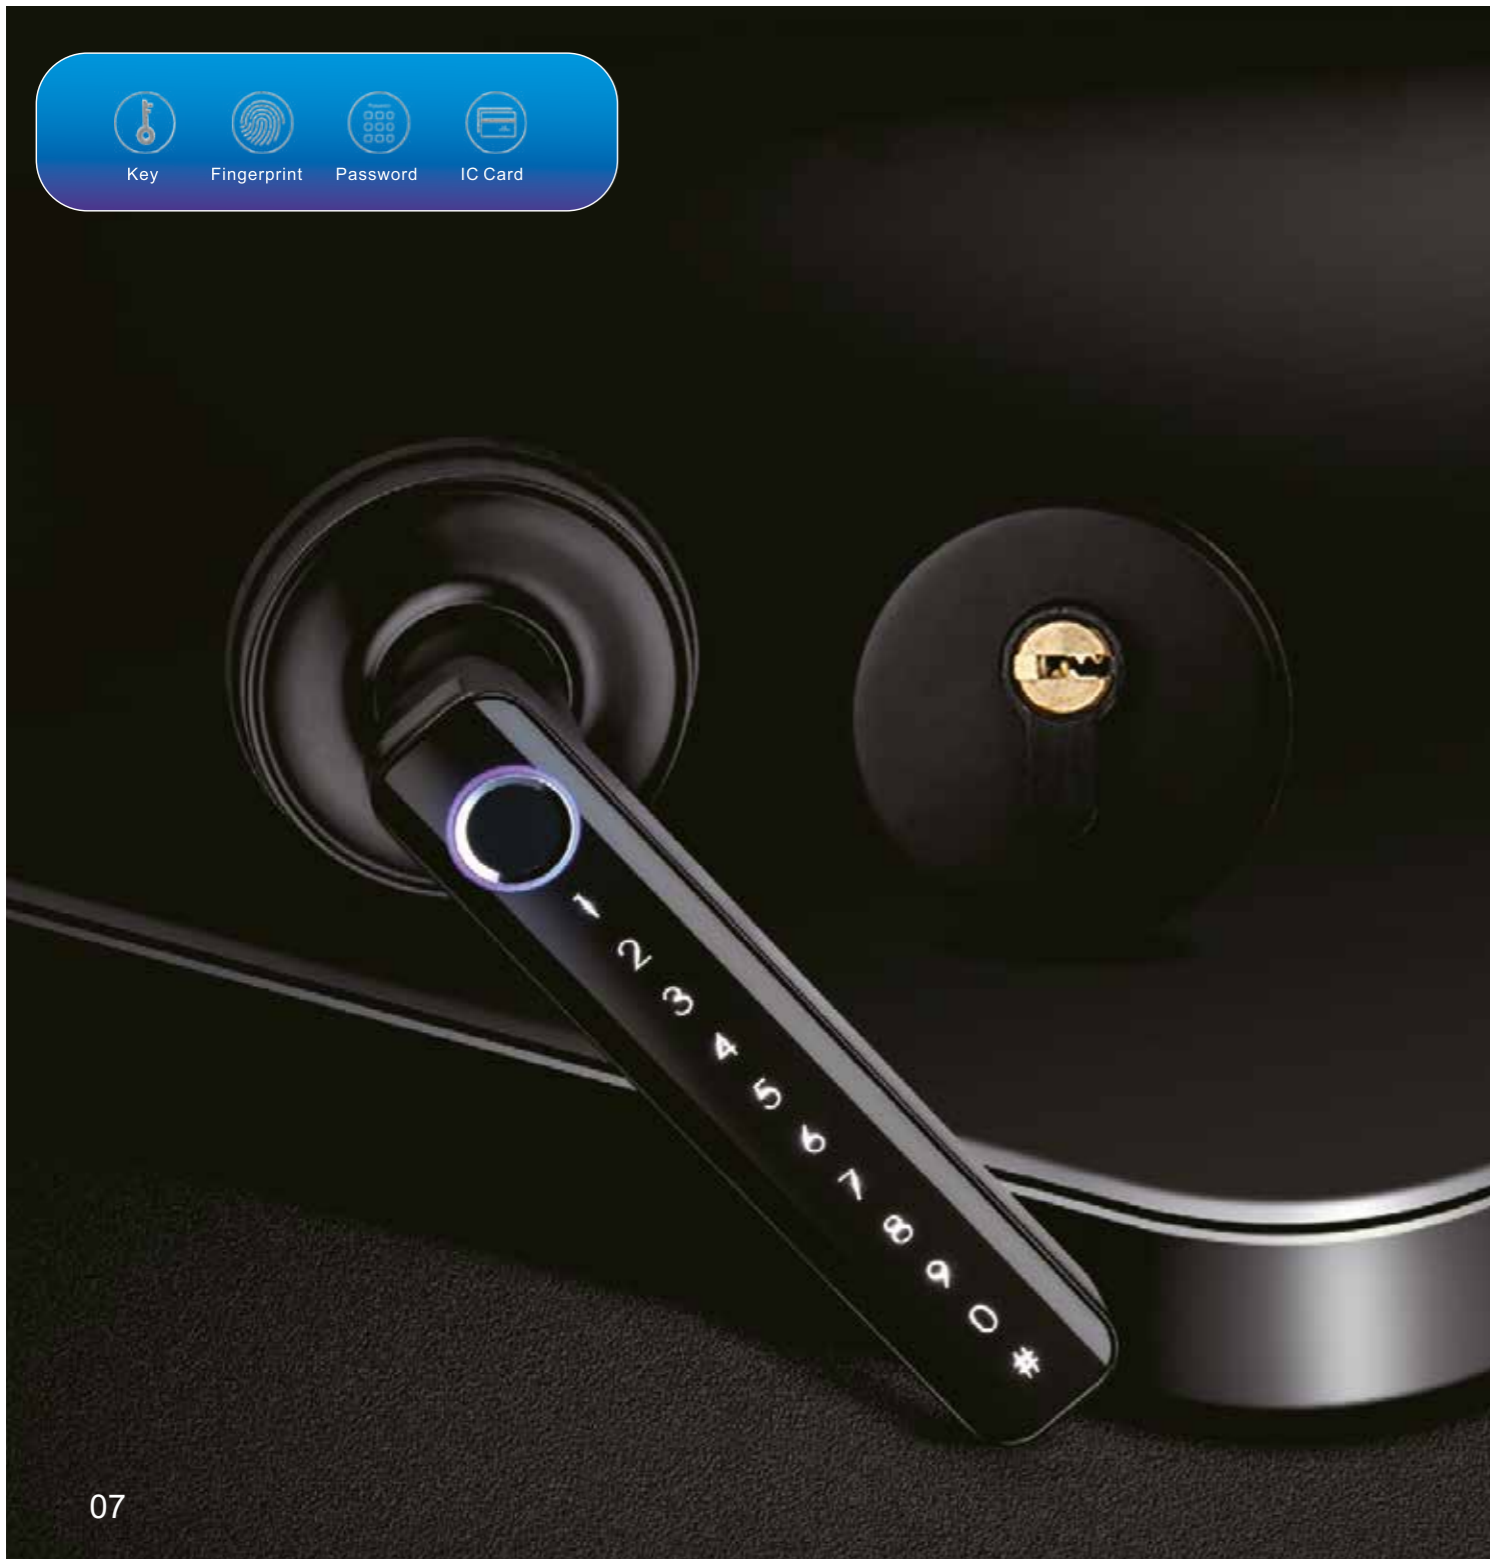

Model:	H168	Material:	Aluminum Alloy+PC+Acrylic
Color:	● Black	Unlock Way:	Fingerprint/App/Password
Cylinder:	C Level	Power Supply:	4 pcs AAA Batteries
Fingerprint capacity:	50	Passcode:	No limit cyclic
Available Door:	Wood/Steel	Available Thickness:	35mm-55mm
Unlock Direction:	Universal for left/right	Emergency Power:	MicroUSB
Product Dimension:	147x71x31mm		

**Semi-conductor Fingerprint Sensor 360 Degree Recognition**


Quick access with fingerprint with low false recognition rate, good for old man or kids

**0.3s** Quick Recognition

**50** USERS Large capacity user

//

## Technical parameters

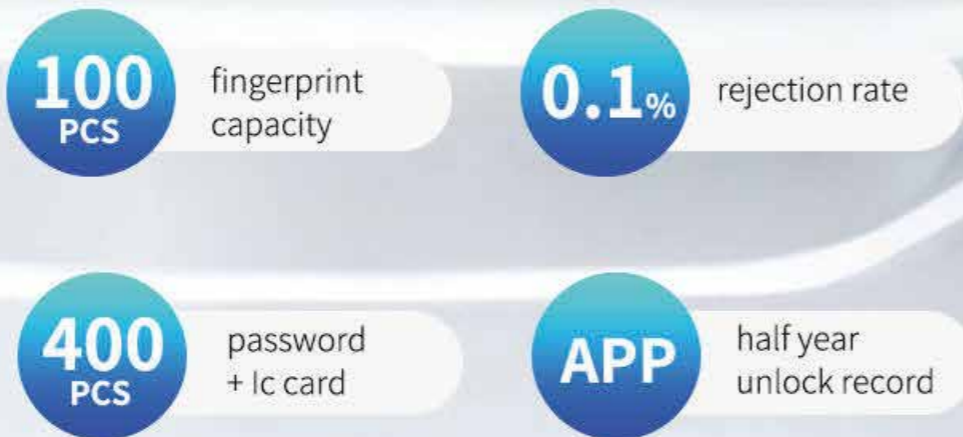

### R5

**Features:**

- \*Smart Bluetooth Rim Lock,
- \*Work with App/Passcode/Fingerprint
- \*Aluminum alloy material
- \*Black nickel treatment
- \*Work with alkaline battery
- \*Emergency key for backup use
- \*200,000 times life test
- \*Work with tuya wifi technology

### D6F-BN

**Features:**

- \*Smart Bluetooth Knob Lock
- \*Work with bluetooth App/Passcode/Fingerprint
- \*Aluminum alloy material
- \*Black nickel treatment
- \*Work with 60 single latch/5572 mortise
- \*Work with alkaline battery
- \*Emergency key for backup use
- \*200,000 times life test
- \*Work with bluetooth technology
- \*Support remote passcode change
- \*Available for WIFI hub for remote management(optional)





# Smart Lock



 **WATERPROOF DESIGN**

 works with **Tuya**



## K3

### Features:

- \*Smart tuya Bluetooth Key box
- \*Zinc alloy housing
- \*Black nickel treatment
- \*Patent structure for the motor mechanism
- \*Work with 4pcs AAA alkaline battery
- \*Micro USB port for emergency charging
- \*Work with bluetooth technology
- \*Support remote passcode change
- \*Available for remote unlock with gatewa



## JD-S1

### Features:

- \*Smart Bluetooth Glass Lock
- \*Work with bluetooth App/Passcode/Fingerprint
- \*Zinc alloy material
- \*Black nickel treatment
- \*Work for glass door 10-15mm
- \*Work with alkaline battery
- \*200,000 times life test
- \*Work with bluetooth technology
- \*Support remote passcode change
- \*Available for WIFI hub for remote management(optional)

# FACE RECOGNITION SMART LOCK

Soft Touch Unlock Remote Management



3D Face



## Smart Lock

### i9

#### Features:

- \*Smart Tuya Camera Auto Lock
- \*3D Facial recognition technology
- \*With camera monitoring(1000,000 pixel)
- \*With fingerprint sensor
- \*Aluminum alloy panel and Japan IML technology
- \*Gray nickle treatment
- \*Work with 60-68 security gear mortise
- \*Support fingerprint/face/Password/IC card
- \*Work with super power lithium battery
- \*Emergency key for backup use
- \*200,000 times life test
- \*Work with tuya Wi-Fi technology
- \*Support dynamic password and remote unlock



### i10

#### Features:

- \*Smart Tuya Camera Auto Lock
- \*3D Facial recognition technology
- \*With camera monitoring(1000,000 pixel)
- \*With fingerprint sensor
- \*Aluminum alloy panel and IML technology
- \*Gray nickle treatment
- \*Work with 60-68 security gear mortise
- \*Support fingerprint/face/Password/IC card
- \*Work with super power lithium battery
- \*Emergency key for backup use
- \*200,000 times life test
- \*Work with tuya Wi-Fi technology
- \*Support dynamic password and remote unlock



# FACE RECOGNITION SMART LOCK



IP64  
waterproof



15



## Smart Lock



### i13

#### Features:

- \*Smart Tuya Camera Auto Lock
- \*3D Facial recognition technology
- \*With camera monitoring(1000,000 pixel)
- \*With fingerprint sensor
- \*Aluminum alloy panel and IML technology
- \*Gray nickle treatment
- \*Work with 60-68 security gear mortise
- \*Support fingerprint/face/Password/IC card
- \*Work with super power lithium battery
- \*Emergency key for backup use
- \*200,000 times life test
- \*Work with tuya Wi-Fi technology
- \*Support dynamic password and remote unlock



### A216-BN

#### Features:

- \*Smart Tuya Camera Auto Lock,IP64 waterproof
- \*3D Facial recognition technology
- \*With digital door viewer, support photo capture and video talking
- \*With fingerprint sensor
- \*Aluminum alloy panel
- \*Black nickle treatment
- \*Work with 60-68 security gear mortise
- \*Support face recognition/ fingerprint/face/Password/IC card
- \*Work with super power lithium battery
- \*Emergency key for backup use
- \*200,000 times life test
- \*Work with tuya Wi-Fi technology
- \*Support dynamic password and remote unlock

# Model M/wi-Fi

## Smart Module Switch

Remote Control Voice Control  
Set Schedule Electricity Monitoring



Alexa, turn off the living room 🗨️

compatible with **Amazon alexa**

compatible with **Google Assistant**

OK 😊

**1CH Wi-Fi Switch Module-L**  
Voltage : AC200-240V 50/60Hz  
Max.load : 10-100W

**1G Wi-Fi Switch Module NO Neutral**  
Voltage : AC200-240V 50/60Hz  
Max.load : 10-100W 10A  
Size:39.2x39.2x18mm  
Wifi + Bluetooth



**M-1CH**  
1 Gang Switch



**M-2CH**  
2 Gang Switch



**M-3CH**  
3 Gang Switch



**M-4CH**  
1 Gang Switch



**M-1CM**  
1 Gang Curtain Switch



**M-2CM**  
2 Gang Curtain Switch



**M-1DM**  
1 Gang Dimmer



**M-2DM**  
2 Gang Dimmer





ios



Android



# Smart Module Switch

# Model MZ/Zigbee

Remote Control Voice Control  
Set Schedule Electricity Monitoring



**MZ-1CH**  
1 Gang Switch



**MZ-2CH**  
2 Gang Switch



**MZ-3CH**  
3 Gang Switch



**MZ-4CH**  
4 Gang Switch



**MZ-1DM**  
1 Gang Dimmer



**MZ-2DM**  
2 Gang Dimmer



**MZ-1CM**  
1 Gang Curtain



**MZ-2CM**  
2 Gang Curtain



**MZ-1CH-L**  
1 Gang Switch Single Live



**MZ-2CH-L**  
2 Gang Switch Single Live



**MZ-3CH-L**  
3 Gang Switch Single Live



## Smart Module Switch

Model MZ/Zigbee

Remote Control Voice Control  
Set Schedule Electricity Monitoring



1Gang - Grey



2Gang - Grey



3Gang - Grey



4Gang - Grey



1Gang - White



2Gang - White



3Gang - White



4Gang - White



1Gang - Gold



2Gang - Gold



3Gang - Gold



4Gang - Gold



1Gang - Black



2Gang - Black



3Gang - Black



4Gang - Black



# Smart Thermostat Valve

# MTV03



MTV01



MTV02



MTV05



MTV04




# Smart Thermostat

M8000C



## Efficient Customization One-stop Procurement

Temperature controller manufacturer

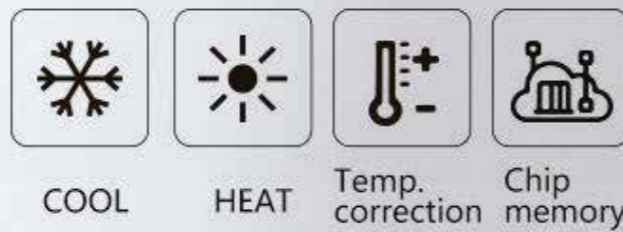

White



Black



Grey

4.8" Screen  
Remote Control

Screen size	Visible thickness	Heat emission hole
4.8"	2cm	54pc
	<b>Power Supply</b>	• 24VDCAC ±10%
	<b>Current Load</b>	• 1A (Inductive) 3A (Resistance)
	<b>Sensor</b>	• NTC3950 10K
	<b>Set Temp. Range</b>	• 40-122 °F (5-50°C)
	<b>Accuracy</b>	• ±1°F
	<b>Display Temp. Range</b>	• 41-210 °F (5-99°C)
	<b>Ambient Temp.</b>	• 32-113 °F (0-45°C)
	<b>Ambient Humidity</b>	• 5-99%RH (Non-Condensing)
	<b>Storage Temp.</b>	• 23-113°F (-5-45°C)
	<b>Timing Error</b>	• ±1%
	<b>Power Consumption</b>	• <1.5W
	<b>Shell Material</b>	• PC+ABS (V0 grade)
	<b>Available Installation 1</b>	• Wall mounted
	<b>Available Installation 2</b>	• Distance of 62±1mm (Europe, China and Japan)
	<b>Available Installation 3</b>	• Hole Distance of 86±1mm (USA and Italy etc.)
	<b>Wire Terminals</b>	• Wire 2x1.5mm <sup>2</sup> or 1x2.5mm <sup>2</sup>
	<b>Protection Class</b>	• IP20
	<b>Buttons</b>	• Capacitive Touch Buttons



## Smart Thermostat

# Thermostat



## MEMORY PROTECTION

### Heating Room Thermostat BHT-003Series

Preset adjustment of 5+1+1 mode in a week, programmable setting of 6 periods in a day, green energy saving and less costSpending, more intelligent environmental protection



MHT0006



White



Black

MHT0003



# Smart Thermostat

# Thermostat



**MLED-B12**



**MLCD-B2**





# Smart Knob Thermostat

**MBH7000**



## Smart Knob Thermostat

Suitable for water and electricity boiler heating system

TFT true color screen . Knob temperature control  
Nine categories of options control



Satin Silver



Stand By Screen



Master Control



Satin Gold



Satin Black



# Control Panel



F8 - background music and Tuya IOT



- Support and control TUYA intelligent ecological chain equipment
- Support TUYA application addition
- Personalized screen saver settings
- Timing switch
- Support customization



F6 - background music and Tuya IOT



F7 - background music and Tuya IOT



F10 - background music and Tuya IOT



# Control Panel



**F3 - PRO**

- 86 Into the wall type hidden installation structure, easy installation mode, no need to transform the wall, any collocation.
- Smart home interconnection, situational mode, device automation, remote APP control.
- It can easily realize the precise control of intelligent devices such as lights, curtains, air conditioners, etc., without hands, compatible with some TUYA ecological devices.
- You can customize a linkage scenario to quickly change the scenario mode.



**KG056-W**

- 3.5 inch 480\*320 IPS Screen
- BLE Mesh Gateway
- Camera Viewer
- Built-in IR
- Security Alarm



### Zigbee Combustible Gas Sensor



#### MV09270

- When detected gas leakage will alarming and send out signal to gateway.
- Working Voltage: AC85V-250V
- Average Consumption:  $\leq 1.5W$
- Alarm Sound: 70db (1meter)
- Alarm Density:  $7\%LEL \pm 3\%LEL$  (CH4)
- Zigbee standard :IEEE802.15.4
- Zigbee working frequency: 2.400GHz-2.484GHz



US



UK



EU

### Zigbee PIR Motion Sensor



#### MV09266

- USB Input voltage: DC5V/ 2A
- Battery Input voltage: DC3V Lr03
- Static Current:  $\leq 35\mu A$
- Working current:  $\leq 15mA$
- Low-voltage notification:  $\leq 2.4V$
- Zigbee operating frequency: 2.400GHz-2.484GHz
- Detecting Distance: 6M
- Detecting Angle: 360°Ceiling Mounted
- Working Temperature:  $-10 \sim +50^{\circ}C$



### Zigbee Water Leakage Detector



#### MV09271

- When detected water leakage will send out signal to gateway.
- Input Voltage: DC3V CR123A
- Standby Current:  $\leq 10\mu\text{A}$
- Alarm Current:  $\leq 75\text{mA}$
- Low-voltage:  $\leq 2.5\text{V}$
- Zigbee working frequency: 2.400GHz-2.484GHz
- Detection method: Water detection
- Working Temperature:  $-10- +50^\circ\text{C}$
- Working Humidity:  $\leq 95\%RH$

### Zigbee Smoke Detector



#### MV09269

- When detected smoke leakage will alarming and send outsignal to gateway.
- Input voltage: DC3V Lr03
- Quiescent current:  $\leq 35\mu\text{A}$
- Working current:  $\leq 100\text{mA}$
- Low voltage and under-voltage:  $\leq 2.4\text{V}$
- Alarm sound pressure: 85db/1m
- Zigbee standard: IEEE802.15.4
- Working frequency: 2.405 ~ 2.480GHZ
- Detection range: 20m<sup>2</sup>

# Zigbee Temperature Humidity Sensor



Intelligent linkage, taking care of one step faster  
APP intelligent control  
Give you a healthier room



**Mv09268**



- Product parameter: DC3V Lr03
- Quiescent current:  $\leq 10\mu A$
- Alarm current:  $\leq 15mA$
- Low voltage and undervoltage:  $\leq 2.6V$
- Zigbee working frequency: 2.400GHz-2.484GHz
- Detection temperature:  $-10^{\circ}C \sim +60^{\circ}C$
- Detection humidity: 0-100%RH
- Working temperature:  $-10-50^{\circ}C$
- Working humidity: maximum 95%RH



**MV09267**



- Product parameter: DC3V Cr2450
- Quiescent current:  $\leq 10\mu A$
- Alarm current:  $\leq 15mA$
- Low voltage and undervoltage:  $\leq 2.6V$
- Zigbee working frequency: 2.400GHz-2.484GHz
- Detection temperature:  $-10^{\circ}C \sim +60^{\circ}C$
- Detection humidity: 0-100%RH
- Working temperature:  $-10-50^{\circ}C$



MV08229

### Zigbee Human Motion Sensor

Detection distance : 7-10M  
 Detection angle : Wide angle 120°  
 Battery: 3V Cr2450  
 Operating Temperature : -10°C-55°C  
 Working humidity : 10%-90%RH ( Non-condensing )  
 Main function : Intelligent linkage  
 Wireless Standard : WIFI802.11b/g/n Zigbee802.15.4  
 Housing material : ABS



MV09272

### Wi-Fi Combustible Gas Sensor

Input voltage: AC 85V-250V  
 WiFi Standard: 802.11b/g/n  
 Alarm concentration: 6% LEL ± 3% LEL (Ch4)  
 Average Consumption: ≤1.5W  
 Alarm Sound: 70dB/m  
 Working Temperature: -10°C -- + 50°C  
 ●Working Humidity: ≤95%RH  
 ●Product Size: 55\*48\*30mm



CO400A

### WiFi Carbon Monoxide Detector

Input Voltage: DC3V LR6-AA\*2  
 Static Current: ≤55uA  
 Alarm Current: ≤160mA  
 Low Voltage: ≤2.4V  
 Wi-Fi: 802.11b/g/n  
 Detectable Gas: Carbon Monoxide(CO)  
 Alarm set value: 128ppm (±50ppm)  
 Alarm Sound: ≥70dB/1M  
 Alarm Mode: Sound and flash Alarm  
 Installation Method: Wall Mounting  
 Working Temperature: -10°C to 55°C  
 Working Humidity: Up to 95% RH



MV08917

### Wi-Fi Smoke Detector

Power supply : DC9V alkaline battery (6LR61)  
 Static current : <10uA  
 Alarm current: <100mA  
 Working temperature : 0°C ~ +50°C  
 Humidity : ≤95%RH , no freezing  
 Alarm sound : >80dB  
 Low battery alert : ≤7.0V±0.2V



# Smart Sensor



WORKS WITH amazon alexa

works with the Google Assistant



## Wi-Fi Door Window Sensor

### MV08362

Battery:	LR03-1.5V/AAA*2 (Alkaline battery)
Battery Life:	6000 times trigger Standby
Current:	8uA Alarm
Current:	70mA ~ 120mA Wireless
Type:	2.4GHz Wireless
Standard:	IEEE 802.11b/g/n
Working Temperature:	0°C ~ 40°C (32°F ~ 104°F )
Working Humidity:	20% ~ 85% RH
Storage Temperature:	0°C ~ 60°C (32°F ~ 140°F )



## Zigbee Door Window Sensor

### MV09265

Input voltage:	DC3V LR03*2
Standby current:	≤10uA
Alarming current :	≤15mA
Low-voltage notification:	≤2.5V
Zigbee frequency:	2.400GHz-2.484GHz
Magnetic control distant:	≥15mm
Working temperature:	-10-50°C



## Wi-Fi Temperature & Humidity Sensor with LCD Screen

## Smart Sensor



MV08062 WIFI/Zigbee

### Wi-Fi IR Remote Control Sensor

- \* 360° Full Range Coverage
- \* Mobile Phone Remote Control
- \* Support Smart Voice Speaker
- \* Support Timer Function
- \* Smart Learn Function & DIY



S09 WIFI

Size: 65\*65\*17mm  
 Micro In put: DC 5V/1A  
 LED Indicator: Blue  
 Wi-Fi Protocoll: 2.4GHz  
 Wi-Fi Stand: IEEE802.11 Bb/g/n  
 Temperature Measure Range: 0°C~60°C  
 Tempearture Accuracy: ±1°C



MV08360A



MV08360B



MV08360C



Size: 65\*65\*17mm  
 Micro Input: DC 5V/1A  
 LED Indicator: Blue  
 Wi-Fi Protocol: 2.4GHz  
 Wi-Fi Standard: IEEE802.11 Bb/g/n  
 Temperature measure range: 0°C~60°C  
 Temperature Accuracy: ±1°C



## Smart Water Sensor

### MV08735

Battery: LR03-1.5V/AAA\*2 (Alkaline battery)  
 Battery Life: 6000 times trigger  
 Standby Current: 8uA  
 Alarm Current: 70mA ~ 120mA  
 Wireless Type: 2.4GHz  
 Wireless Standard: IEEE 802.11b/g/n  
 Working Temperature: 0°C ~ 40°C (32°F ~ 104°F )  
 Working Humidity: 20% ~ 85% RH Storage  
 Temperature: 0°C ~ 60°C (32°F ~ 140°F )  
 Storage Humidity: 0% ~ 90% RH  
 App: Tuya smart or Smart life  
 Supports Android 4.4 and iOS 8.0 or newer  
 Size: Sensor: 71mm x 25mm x20 mm S  
 Sensor Cable: 1m  
 Material: ABS  
 Patent No.: 201930649295.9

## PIR Motion Sensor



### MV08361

**Wi-Fi Connection / High accuracy / Large detection range**

Size: 70\*45\*35.6mm  
 Battery: LR6-1.5V/AA\*2(Alkaline battery)  
 Micro Input: DC 5V/1A Detect Angle: 128°  
 Detect Distance: ≤8m  
 WiFi Type: 2.4GHz  
 WiFi Standard: IEEE 802.11 b/g/n  
 Working Temperature: 0°C~50C  
 Working Humidity:10%~85% RH  
 App: Tuya Smart or Smart Life  
 Support Android 4.4+ or iOS 8.0+ version Includes  
 Micro charging cable, adhesive tape and screws





Intelligent device control center  
Remote Control/custom Ringtone  
Connection to other smart devices

# Smart Gateway



Smart Zigbee Wireless Gateway

## MZG01

### Product specifications

Appearance size :61\*61\*15mm  
Weight: Net Weight 33g  
Status indicator :1Power indicator,1Network indicator  
Operation buttons :1 button (reset)  
Adapter :110V ~ 240VAC, 5V/1ADC  
Working Voltage: 1.8V ~ 3.3V  
Working temperature :-10-55°C  
Working humidity :10%-90%RH(Non-condensing)  
Storage temperature :-20-60°C  
Storage humidity :5%-90%RH(Non-condensing)  
IEEE 802.15.4 2.4~2.485Ghz  
Zigbee 3.0



Smart Multi-Mode Gateway

## MZG03

### Product specifications

Appearance size :60\*60\*15mm  
Weight: Net Weight 32g  
Status indicator :2 LED (Wi-Fi/Zigbee/Bluetooth)  
Operation buttons :1 button (reset)  
Power supply :MicroUSB DC5V  
Working current :<1A  
Adapter :110V ~ 240VAC, 5V/1ADC  
Working Voltage: 1.8V ~ 3.3V  
Working temperature :-10-55°C  
Working humidity :10%-90%RH(Non-condensing)  
Storage temperature :-20-60°C  
Storage humidity :5%-90%RH(Non-condensing)  
Hardware interface :1Micro-USB  
Wireless technology  
IEEE 802.15.4 2.4~2.485Ghz  
Zigbee 3.0 / BLE5.0



Smart Zigbee LAN Gateway

## MZG02

### Product specifications

Appearance size :92\*92\*25.5mm  
Weight: Net Weight 100g  
Status indicator :4 LED (Green)  
Operation buttons :2 button (reset)  
Power supply :MicroUSB DC5V  
Working current :<1A  
Adapter :110V ~ 240VAC, 5V/1ADC  
Working Voltage: 1.8V ~ 3.3V  
Working temperature :-10-55°C  
Working humidity :10%-90%RH(Non-condensing)  
Storage temperature :-20-60°C  
Storage humidity :5%-90%RH(Non-condensing)  
Hardware interface :Micro-USB, 1 LAN Interface  
Wireless technology  
IEEE 802.15.4 2.4~2.485Ghz

**Someone passed, get mobile notification**  
Arm the detector, the sensor detects that someone has passed, send the alarm alert to your mobile in real time.



**Someone passed, light turn on**  
Work together with smart switch, it automatically lights up when people pass, convenient and saves electricity!



**High-decibel audio alarm**  
The high-decibel alarm scares off the intruder




**Real-time monitoring with smart camera**  
After detecting someone passing, the camera 360° real-time video can watch the monitoring screen in real time through the mobile APP.



# IP65

# Waterproof Level



MTYP2

## Smart Wireless Camera

IP65 Series



MTYT8

### Features:

- \*H.265 compression format, real-time monitoring and high-definition
- \*Dual Light PCB designed, Two way Audio, Full color night Vision
- \*3.0MP real-time image transmission, adaptive network, smooth experience
- \*up to 25 frames per second
- \*Echo cancellation and noise suppression technology, perfect full-duplex voice effect
- \*With Amazon cloud penetration technology, one-key remote, plug and play



MTYD6

### Intelligent Mobile Tracking

— MOBILE TRACKING —

Intelligent recognition of the human body, detect the dynamic lens automatic tracking





# Smart HD Camera

MSHDC-02

## Multiple Storage Methods

# 1080P PTZ Smart WiFi Camera

1080P HD Quality



SHDC-02

2MP HD Quality	Motion Detection	Two-Way Audio Talk
Remote View	IP66 Waterproof	Intelligent Cruise
Wireless WiFi	Cloud Storage SD Card Storage	Smart IR

### Features:

- \* 1080P PTZ smart camera
- \* Support WIFI function, 2dB antenna
- \* Two-way voice intercom function
- \* Excellent Adaptive Night Vision Automatic Function
- \* 15m infrared night vision, low light environment, details are clearly visible
- \* 360° full viewing angle, pan/tilt function, horizontal 355°, vertical 100° flexible rotation
- \* Support automatic/alarm/timed recording
- \* Humanoid automatic tracking function
- \* Support multi-terminal real-time viewing
- \* Support online operations on major platforms, support

1. TF card storage Support up to 128G TF card	2. Cloud storage Device activity video can be stored in the cloud and viewed anytime, anywhere	3. NVR storage Support smart protocol
--	---	--





ZMP HD Quality	Motion Detection	Two-Way Audio
Remote View	Alarm notifications	Intelligent Cruise
Wireless WiFi	Cloud Storage SD Card Storage	Smart IR

# Smart HD Camera

MSHDC-04

HD Quality

## 1080P PTZ Smart WiFi Camera

1080P HD Quality



- 1. TF card storage (Support up to 128G TF card)
- 2. Cloud storage (Device activity video can be stored in the cloud and viewed anytime anywhere)
- 3. NVR storage (Support smil protocol)

### Description:

- \* Two-way intercom \* wireless intelligent connection
- \* 360-degree HD monitoring
- \* Motion detection, intelligent alarm
- \* Professional infrared filling lamp system
- \* Support 2 million night vision lenses, 2 million high resolution images, fine texture
- \* Focal length 3.6mm, daytime visible range of 30m, night vision range of 20m
- \* Intelligent qos algorithm automatically adjusts bit stream and frame rate, adaptive network, bringing perfect video experience
- \* Support tf card storage, the maximum memory expansion to 128G, can be played at any time, video editing





# Smart HD Camera

E27 Camera

HD Quality



## WiFi 360 Panoramic Light Bulb Camera



### MTYP2V

**Features:**

- \*Simple installation, E27 lamp holder can work;
- \*360 degree panoramic picture, the picture can change the angle arbitrarily;
- \* Million pixels, h.265 compressed format;
- \*Duplex call, humanoid trigger alarm
- \*Support 4x digital zoom



### MTYP5V

**Features:**

- \*Simple installation, E27 lamp holder can work;
- \*360 degree panoramic picture, the picture can change the angle arbitrarily;
- \* Million pixels, h.264 compressed format;
- \*Duplex call, humanoid trigger alarm
- \*Support 4x digital zoom



## Smart HD Camera



## Smart HD Camera



### MTYS2-k01

Features:

- \*1920X1080P
- \* H.264 compressed format
- \* 5meter visual range
- \* 100 degree panoramic picture



### MTYP5D

Features:

- \*1920X1080P
- \* H.265 compressed format
- \* Support 16x digital zoom
- \* 10 meter visual range
- \* 355 degree panoramic picture
- \* Size:115X68.5mm



## MTYS10

- \* Solar panel universal adjustment, built-in super capacity battery
- \* Ultra-low power standby, quick wake up in 0.2 seconds
- \* PIR sensor + radar dual alarm detection
- \* High-performance ISP and 1/2.7" progressive sensor, backlight full color
- \* 1920\*1080P HD video
- \* Built-in microphone and loudspeaker, support two way audio
- \* Support Cloud storage and local storage
- \* APP support Android/IOS
- \* IP65 waterproof
- \* Support All-in-One installation and separated installation



## MIPC216

- \* Ip 66
- \* 1080p Wifi Waterproof Bullet Solar Panel
- \* Charging Metal Camera
- \* Real Time Message Push
- \* Rechargeable Solar Panel With 4pcs 18650 Batteries
- \* Standby 4-6 Months
- \* 6w Solar Board

## Smart Solar Camera



## MTPP6

- \* Full HD 1080p Battery Powered Security Camera with PIR Sensor (with Solar Panel for Continuous Power Charging Outdoor)
- \* The recharge battery can support 180 days standby, video intercom, infrared detection, fast response, easy installation.
- \* T21Z Chipset, More functions and lower power consumption
- \* Infrared night vision, guarding family safety 24 hours a day
- \* Intelligent motion detection, abnormal situation is pushed to mobile phone within 1second
- \* 2pcs 18650 rechargeable batteries, standby for up to 6 months
- \* 1080P 2.0MP high-definition picture quality, the picture is clearer and more delicate
- \* LinUX operating system, start faster, run more stable
- \* Wi-Fi/AP connection, no wiring required
- \* HD 2.0MP image sensors for recording clear dynamics
- \* Two wake-up methods: mobile phone remote active wake-up, PIR wake-up
- \* Support iOS and Android systems



## MSZ01

- \* HD 2 million pixel CMOS image sensor, which has good low illumination effect and high image definition.
- \* Support 2.0MP (1920\*1080P) HD resolution.
- \* Support IR-CUT day and night switching, support day and night full color, APP free switching.
- \* Support phone wake-up and PIR wake-up.
- \* Support two-way voice intercom.
- \* Support SD card storage, cloud storage, video query playback.
- \* Support device sharing .
- \* Its own intelligent detection algorithm effectively reduces false alarms.
- \* The device configuration can be realized in only 2 steps.
- \* The fastest time to wake up to see the image can be within 3 seconds, and the message will be pushed within 1 second.

## Smart HD Camera

TP-M06



### Features:

- 1080P And 3MP HD Camera
- 3.6mm lens 100° view angle
- Build in 6pcs LEDS IR Distance 5M
- Pan 355° Tilt 80°
- Support Remote play Lullaby, build in 6 lullabies
- Support Temperature Detection
- Support Baby Cry Detection
- Support Two way audio communication
- Support 802.11b/g/n 2.4G Wifi
- Support Cloud storage or max 128GB TF card



tuya

# 1080P Low-power Solar Battery Outdoor Camera

Tuya / onecam App




WIFI

Wireless  
Wiring-free  
Long standby



## Smart Solar Camera

TP-P6T

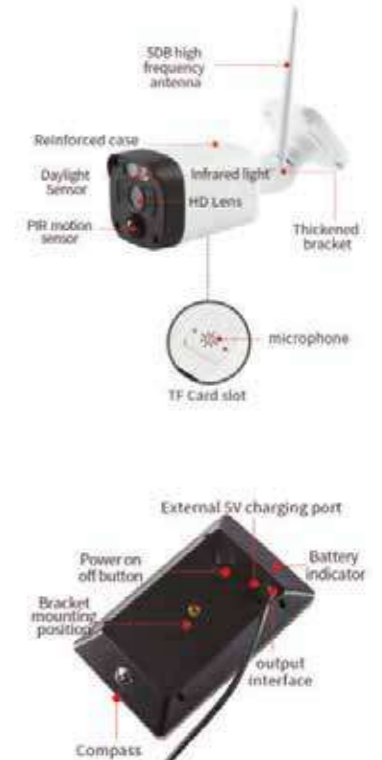

### Features:

- \* Full HD 1080p Battery Powered Security Camera with PIR Sensor
- \* The recharge battery can support 180 days standby, video intercom, infrared detection, fast response, easy installation.
- \* T21Z Chipset, More functions and lower power consumption
- \* Infrared night vision, guarding family safety 24 hours a day
- \* Intelligent motion detection, abnormal situation is pushed to mobile phone within 1second
- \* 2pcs 18650 rechargeable batteries, standby for up to 6 months
- \* 1080P 2.0MP high-definition picture quality, the picture is clearer and more delicate
- \* LinUX operating system, start faster, run more stable
- \* Wi-Fi/AP connection, no wiring required
- \* HD 2.0MP image sensors for recording clear dynamics
- \* Two wake-up methods: mobile phone remote active wake-up, PIR wake-up
- \* Support iOS and Android systems




# Smart HD Camera

TP-TYP5-Y



## Features:

- Simple installation, E27 lamp holder can work;
- 360 degree panoramic picture, the picture can change the angle arbitrarily;
- 2 million and 3 million pixels, h.265 compressed format;
- 3. Duplex call, humanoid trigger alarm
- Support 4x digital zoom

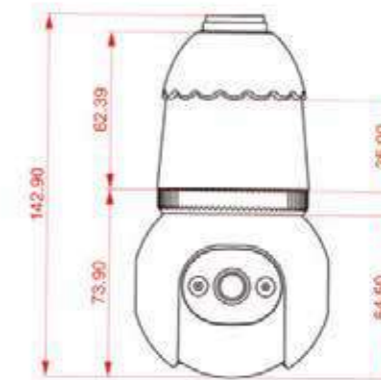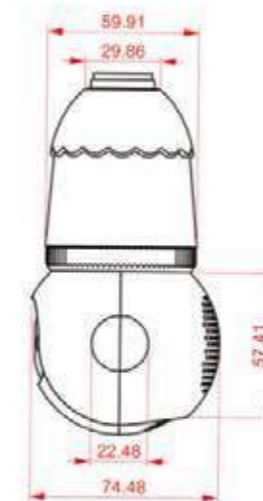



# Smart HD Camera

TP-TY-B08



## Features:

- 2.0MP WIFI camera
- Support WIFI function, 2dB antenna
- Two-way voice intercom function
- Excellent adaptive night vision automatic function(Support manual adjustment)
- 20m infrared night vision, low light environment, details are clearly visible
- Support automatic/alarm/timed recording
- Support multi-terminal real-time viewing
- Support online operations on major platforms, support screen drag, rotate and other operations
- Support TF card slot (TF card not included)



Technical Parameter			
Platform Support	Andriod IOS	Camera Resolution	2.0MP
Transfer Method	2.4G (WIFI)	WIFI Bandwidth	20Mhz(Standard)
TF Card	Max 128G	Camera Power Consumption	Support
Night Vision Distance	20m	Cloud	Support
Audio Codec	G.711A	Audio Input	Built-in Microphone
Audio Output	Built-in Speaker	Intercom	Support
Light Detection	CDS	Capture	Support
Alarm Function	Support	Wottage	4W
Material	PC+ABS	Operating Temperature	-20-+85℃
Power Consumption	Max 2.5W	Product Size	150*155*115mm(L*W*T)



# Smart HD Camera

ODC-28B

HD Quality



## Features:

- 2.0MP WIFI camera
- Support WIFI function,
- Two-way voice intercom function (Support manual adjustment)
- details are clearly visible
- Support automatic/alarm/timed recording
- Support TF card slot (TF card not included)
- Support cloud storage





# Smart Power Strip

M410



- Remote Control
- Voice Control
- Set Schedule
- Electricity Monitoring


Electricity Monitoring

Surge Protection

No Hub Required

Device Sharing

Individually controlled sockets

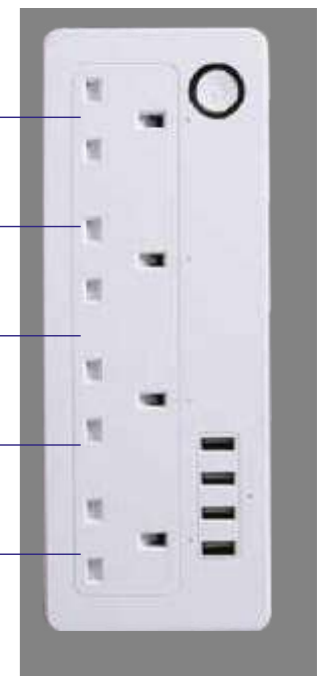



G410

## Smart Power Strip



European Type  
4 plus Extension Lead



- Electricity Monitoring
- Surge Protection
- No Hub Required
- Device Sharing
- Individually controlled sockets

- Remote Control
- Voice Control
- Set Schedule
- Electricity Monitoring



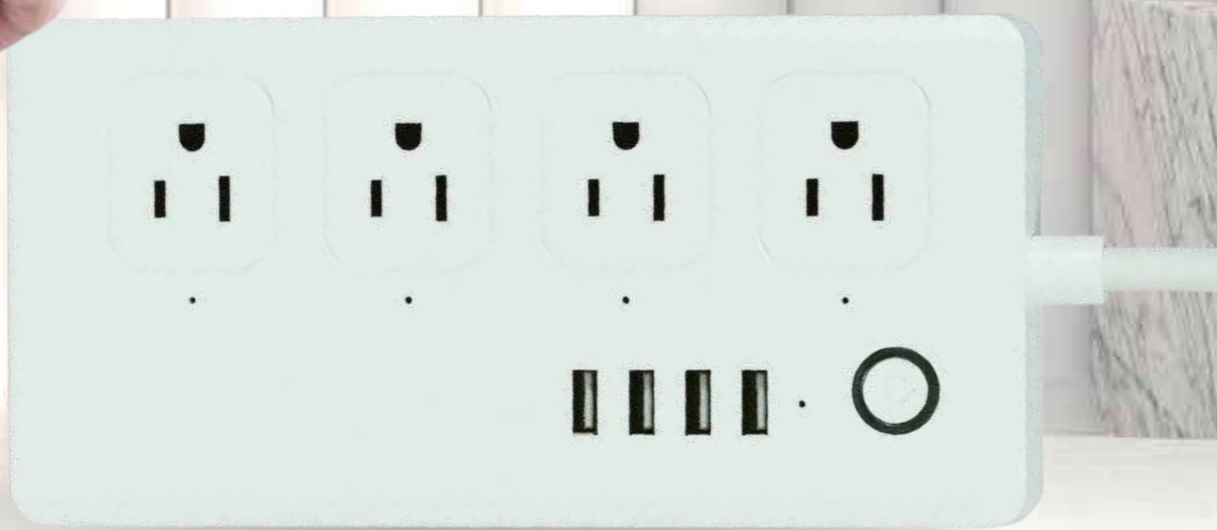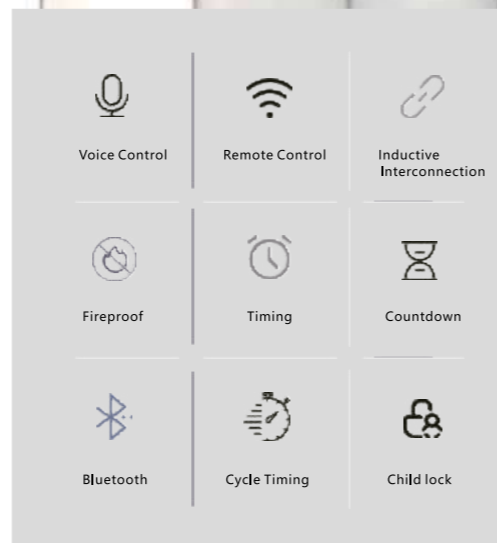

# Smart Power Strip



**Model:U412-4U**  
 American Type  
 4 plus Extension Lead  
 Size:335 x31 x65mm



**Model:U601-3U**  
 American Type  
 6 plus Extension Lead  
 Size:226x90 x30mm



**Model:U401-3U**  
 Universal Type  
 4 plus Extension Lead  
 Size:290x65 x42mm



# Smart Power Strip



### CLY902W-GE

- \*Maximum load current: 16A
- \*Working voltage: 220-240V
- \*Maximum load power: 3680W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Size: 295 \* 57 \* 41MM
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*Socket holes: 4
- \*Wire length: 1.5 meters
- \*Control: 4-hole split control




### CLY902WUM-GE

- \*Maximum load current: 16A
- \*Working voltage: 220-240V
- \*Maximum load power: 3680W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Charging port output: Max 5V, 2.4A
- \*Size: 295 \* 57 \* 41MM
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*2 USB interfaces+1 TYPE-C interface
- \*Socket holes: 4
- \*Wire length: 1.5 meters
- \*Control: 4-hole split control+charging port control
- \*With power metering and electricity fee statistics function



# Smart Power Strip

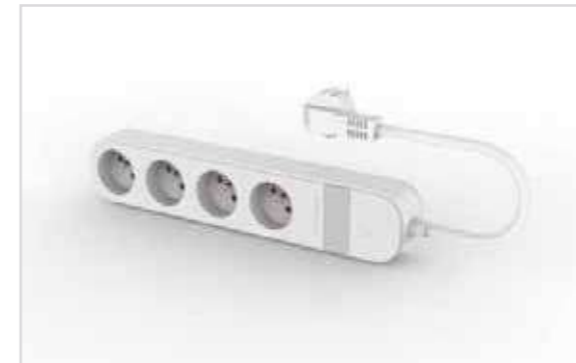

## CLY903W-FR

- \*Maximum load current: 16A
- \*Working voltage: 220-240V
- \*Maximum load power: 3680W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Size: 295 \* 57 \* 41MM
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*Socket holes: 4
- \*Wire length: 1.5 meters
- \*Control: 4-hole split control



## CLY903WUM-FR

- \*Maximum load current: 13A
- \*Working voltage: 220-240V
- \*Maximum load power: 3680W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Charging port output: Max 5V, 2.4A
- \*Size: 295 \* 57 \* 41MM
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*2 USB interfaces+1 TYPE-C interface
- \*Socket holes: 4
- \*Wire length: 1.5 meters
- \*Control: 4-hole split control+charging port control
- \*With power metering and electricity fee statistics function



# Smart Power Strip



## CLY904W-UK

- \*Maximum load current: 13A
- \*Working voltage: 220-240V
- \*Maximum load power: 2990W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Size: 295 \* 57 \* 36MM
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*Socket holes: 4
- \*Wire length: 1.5 meters
- \*Control: 4-hole split control



## CLY904WU-UK

- \*Maximum load current: 13A
- \*Working voltage: 220-240V
- \*Maximum load power: 2990W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Charging port output: Max 5V, 2.4A
- \*Size: 295 \* 57 \* 36MM
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*2 USB interfaces+1 TYPE-C interface
- \*Socket holes: 4
- \*Wire length: 1.5 meters
- \*Control: 4-hole split control+charging port control



# Smart Power Strip



## CLY901W-US

- \*Maximum load current: 15A
- \*Working voltage: 110-130V
- \*Maximum load power: 1800W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Size: 245 \* 57 \* 32MM
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*Socket holes: 4
- \*Wire length: 1.5 meters
- \*Control: 4-hole split control





## CLY901WUM-US

- \*Maximum load current: 15A
- \*Working voltage: 110-130V
- \*Maximum load power: 1800W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Charging port output: Max 5V, 2.4A
- \*Size: 245 \* 57 \* 32MM
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*2 USB interfaces+1 TYPE-C interface
- \*Socket holes: 4
- \*Wire: AWG16 #, 1.5 meters
- \*Control: 4-hole split control+charging port control
- \*With power metering and electricity fee statistics function



## Remote Control

Turn on your water heater in advance, enjoy a lot shower when arrived

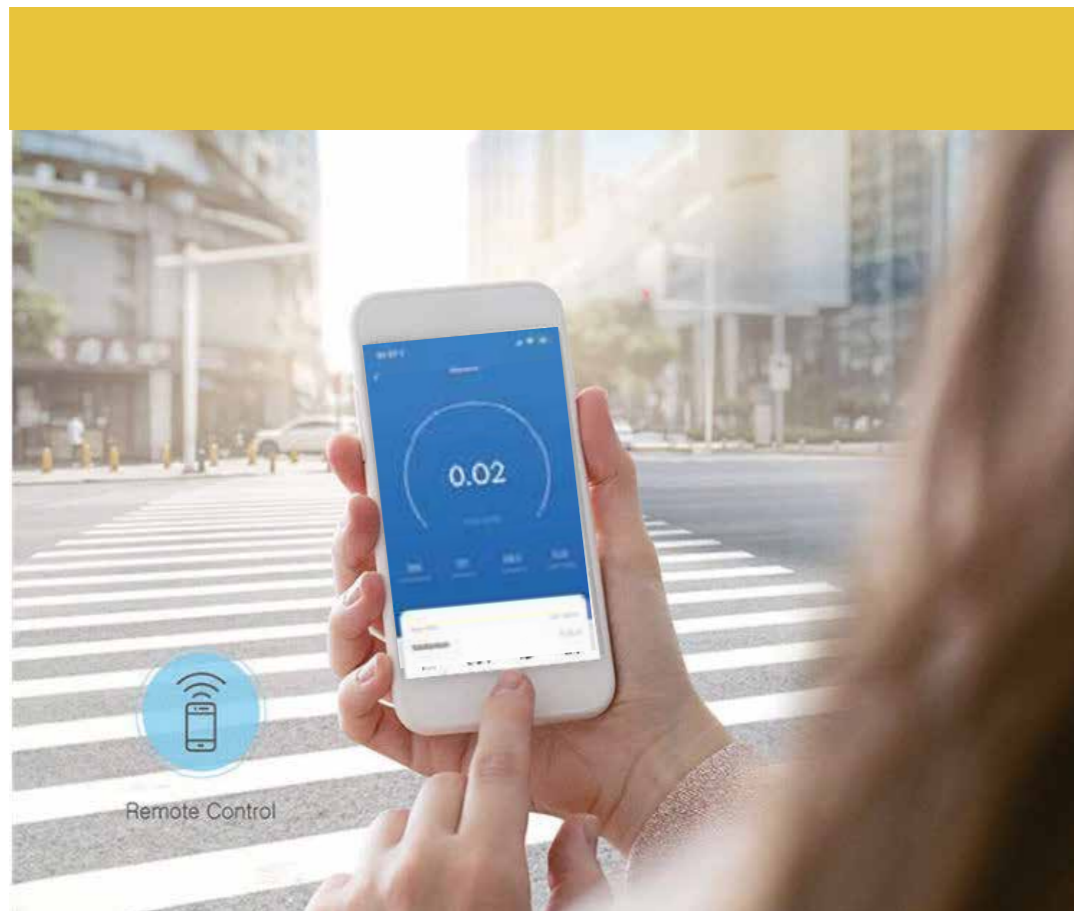

# M410

## Smart Plug



American Type Max Power:2200W  
Smart Socket

### Fire Retardant PC

- \*This socket is a 10A wifi smart socket, using the Tuya smart solution.
- \*Support smart audio voice control such as Tmall Genie.
- \*Mobile phone time delay switch.
- \*Real-time feedback of status, keep an eye on the status of the socket at home at any time.
- \*The whole house intelligent equipment scene linkage, automatically execute the scene mode.
- \*The whole family shares the equipment, multiple users can view at the same time.
- \*Can be used for electrical appliances with power below 2200W.
- \*Imported fire retardant materials, safe and reliable.





# Smart Plug

## European Type

Smart Socket

### Fire Retardant PC

- \*This socket is a 16A wifi smart socket, using the Tuya smart solution.
- \*Support smart audio voice control such as Tmall Genie.
- \*Mobile phone time delay switch.
- \*Real-time feedback of status, keep an eye on the status of the socket at home at any time.
- \*The whole house intelligent equipment scene linkage, automatically execute the scene mode.
- \*The whole family shares the equipment, multiple users can view at the same time.
- \*Can be used for electrical appliances with power below 2200W.
- \*Imported fire retardant materials, safe and reliable.



## K02-16A

Max Power:3680W



## K03-16A

Input voltage :AC100-240V 50/60Hz  
 Maximum current : 16A  
 WIFI standard: 2.4GHz 802.11b /g/n  
 Surge protect: 140J



# Smart Plug



### CLY809M-GE

- \*Maximum load current: 16A
- \*Working voltage: 220-240V
- \*Maximum load power: 3680W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*Dual socket holes
- \*With power metering and electricity fee statistics function



### CLY8101UM-GE

- \*Maximum load current: 16A
- \*Working voltage: 220-240V
- \*Maximum load power: 3680W
- \*Wireless network type: Wi Fi 2.4GHz
- \*USB, TYPE-C output: maximum 5V 2.4A
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*1 USB interfaces+1 TYPE-C interface
- \*Socket products and output ports can be intelligently separated and controlled
- \*With power metering and electricity fee statistics function



# Smart Plug



### CLY803M-FR

- \*Maximum load current: 16A
- \*Working voltage: 220-240V
- \*Maximum load power: 3680W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*With power metering and electricity fee statistics function




### CLY811M-FR

- \*Maximum load current: 16A
- \*Working voltage: 220-240V
- \*Maximum load power: 3680W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*Dual socket holes
- \*With power metering and electricity fee statistics function



## Smart Plug

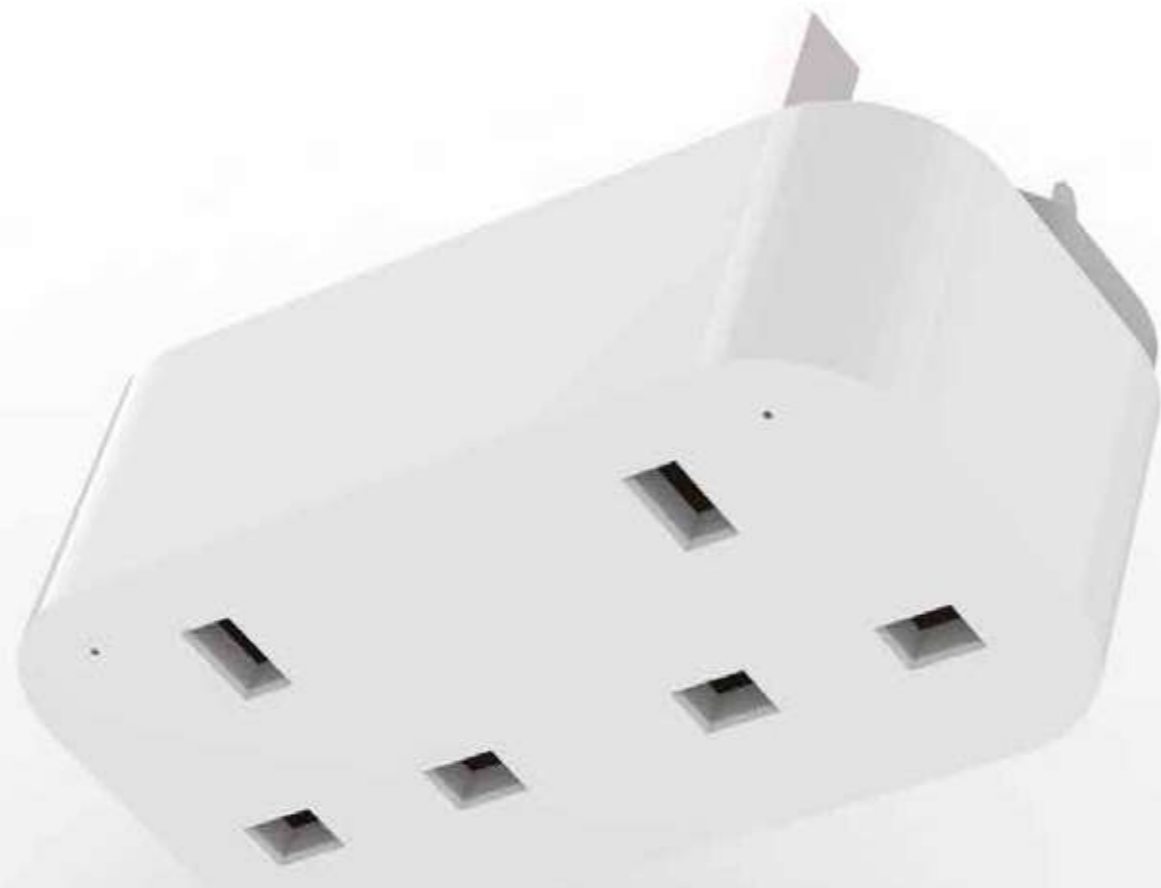

### CLY813M-UK

- \*Maximum load current: 13A
- \*Working voltage: 220-240V
- \*Maximum load power: 2990W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*Dual socket holes
- \*With power metering and electricity fee statistics function



### CLY8141U-UK

- \*Maximum load current: 13A
- \*Working voltage: 220-240V
- \*Maximum load power: 3120W
- \*Wireless network type: Wi Fi 2.4GHz
- \*USB, TYPE-C output: maximum 5V 2.4A
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*1 USB interfaces+1 TYPE-C interface
- \*Socket products and output ports can be intelligently separated and controlled



## Smart Plug



### CLY807-US

- \*Maximum load current: 15A
- \*Working voltage: 110-130V
- \*Maximum load power: 1800W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*Dual socket holes



### CLY8081U-US

- \*Maximum load current: 15A
- \*Working voltage: 110-130V
- \*Maximum load power: 1800W
- \*Wireless network type: Wi Fi 2.4GHz
- \*USB, TYPE-C output: maximum 5V 2.4A
- \*Graffiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*1 USB interfaces+1 TYPE-C interface
- \*Socket products and output ports can be intelligently separated and controlled



# Smart Plug



### CLY817M-BR (10A)

- \*Maximum load current: 10A
- \*Working voltage: 110-240V
- \*Maximum load power: 2200W
- \*Wireless network type: Wi Fi 2.4GHz
- \*Graftiti WiFi control
- \*Timing and Countdown
- \*Voice control
- \*With power metering and electricity fee statistics function



# Wifi Smart Switches




## White

Charge PD 20W USB-A:5V  
3AUSB-C:5V-3A 9V-2.22A 12V-1.67A

## Black

Charge PD 20W USB-A:5V  
3AUSB-C:5V-3A 9V-2.22A 12V-1.67A

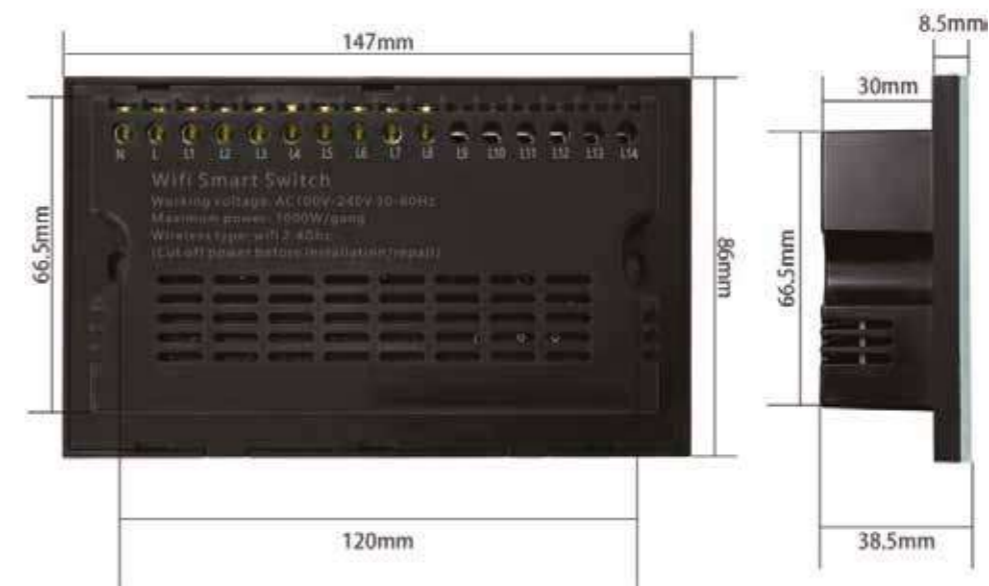



# Wifi Smart Switches




**White**

**Black**


Charge PD 20W USB-A:5V  
3AUSB-C:5V-3A 9V-2.22A 12V-1.67A

Charge PD 20W USB-A:5V  
3AUSB-C:5V-3A 9V-2.22A 12V-1.67A

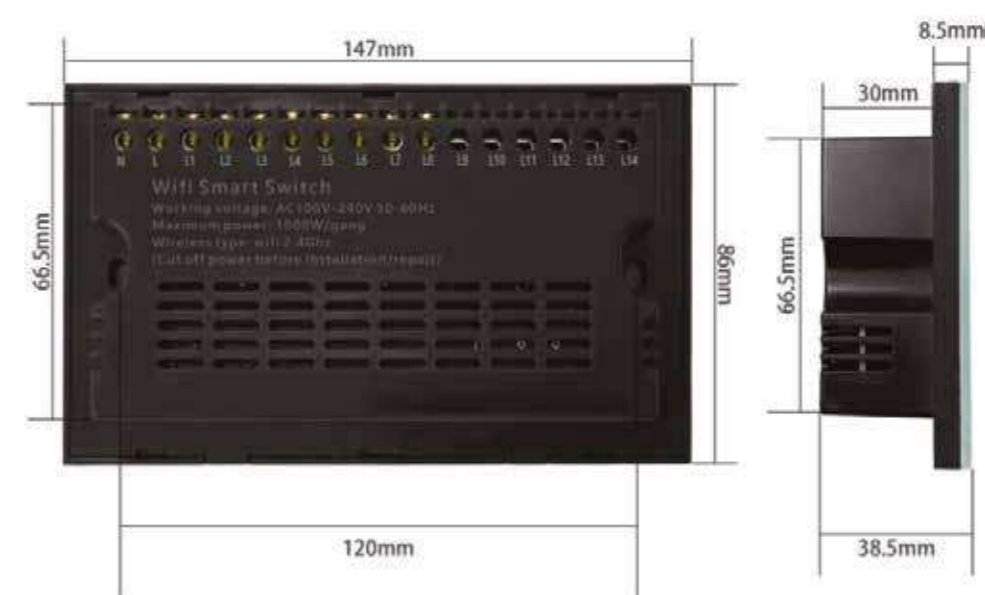




# Wifi Smart Switches

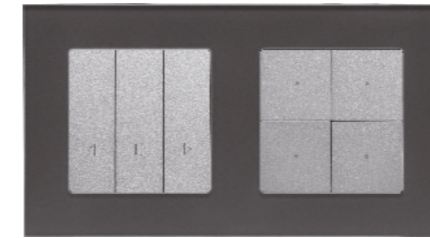


Curtain + 4G

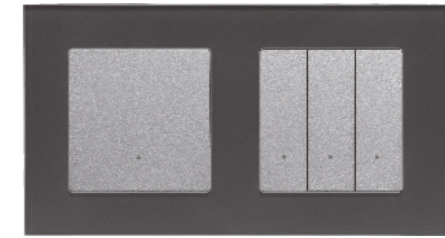


1G + 4G


Modular Button Smart switch




1Gang




2Gang




3Gang




4Gang




Dimmer



Curtain



EU Socket



EU USB + Type C

- ◆ Tempered glass panel, easy to clean, non-discoloring always look as new.
- ◆ Support Alexa and google home
- ◆ Socket status indication
- ◆ Memory function
- ◆ Rated load: 13A
- ◆ Color: white, black, gold
- ◆ Support Wifi 2.4G or Zigbee 2.4G
- ◆ Support Alexa and google home
- ◆ Suitable for home, office, hotel, hospital and so on
- ◆ Certificate: SAA / CE / RoHS



MG-UKWSW



MG-UKWSB

- ◆ Tempered glass panel, easy to clean, non-discoloring always look as new.
- ◆ Support Alexa and google home
- ◆ Socket status indication
- ◆ Memory function
- ◆ Rated load: 13A
- ◆ USB charger: USB 2.0 2.1A
- ◆ Color: white, black, gold
- ◆ Support Wifi 2.4G or Zigbee 2.4G
- ◆ Support Alexa and google home
- ◆ Suitable for home, office, hotel, hospital and so on
- ◆ Certificate: CE / RoHS



MG-UKWSU



MG-UKWSU01



## Wifi Smart Switches

- ◆Tempered glass panel, easy to clean,non-discoloring always look as new.
- ◆Support Alexa and google home
- ◆Socket status indication
- ◆Memory function
- ◆Rated load: 13A

- ◆QC Output:5V~3A,9V~2.22A,12V~1.67A EN62368-1
- ◆Color: white,black,gold
- ◆Support Wifi 2.4G or Zigbee 2.4G
- ◆Support Alexa and google home
- ◆Suitable for home, office, hotel, hospital and so on
- ◆Certificate:CE / RoHS



MG-UKWSPD01



MG-UKWSPD02





## Wifi Smart Switches

- ◆High quality crystal tempered glass panel design
- ◆Suitable for home, office, hotel, hospital and so on

Dimension: 86\*86\*39MM

Operating voltage:110V-240V/50-60HZ

QC Output:5V~3A,9V~2.22A,12V~1.67A

EN62368-1

Rated load:13A

Color: white,black,gold



MG-UKWSUC



MG-UKWSUC01



# Wifi Smart Switches US Type






# Wifi Smart Switches US Type





# Wifi Smart Switches US Type

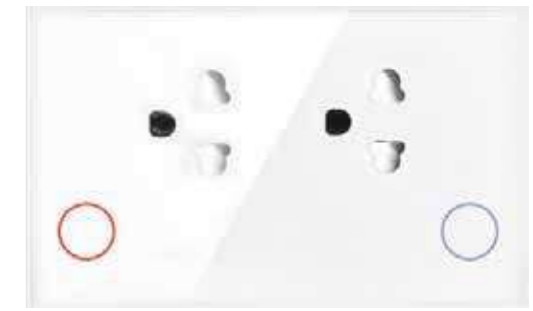



◊ CHIMANLAL VADILAL AND COMPANY ◊

---

80, Abdul Rehman Street, Mumbai - 400 003  
Tel: +91-22-23435016 • M: +91 - 98332 87531 • E: info@cvclumilife.com  
@ Lumilife\_mumbai 📍 Lumilife - Mumbai  
www.cvclumilife.com