

## Enjoy being a **productive** and **happy farmer!**

FieldBee tractor guidance systems are affordable, modular and updatable, making 2.5 cm precision and working with perfectly straight lines accessible for all types of farming operations such as planting, fertilising and harvesting.

Our high-quality guidance and steering systems will serve you for years to come, raising your yields while saving fuel, fertiliser and other farming costs.



- ✓ **30-day money-back guarantee**
- ✓ **Suitable for 1000+ tractor models**
- ✓ **Save ±15% on your input and labour cost**

## Why should you choose FieldBee?

-  **Affordable price.**  
Starting from: € 1,590.00
-  **Delivering 2.5 cm accuracy with RTK technology**
-  **Easy to install, only a few components**
-  **Easy to use**
-  **Easy to switch between tractors**
-  **Made in the EU. Each system goes through detailed inspection**
-  **Free remote support**

**Download our free mobile app on your smartphone**  
Use a tablet or a mobile device




 **SUPPORTING UKRAINE**  **MADE IN THE EU**

## Simple, affordable precision guidance system for your farm



**9+** years  
**60+** countries  
**100+** team members

[fieldbee.com](https://fieldbee.com)

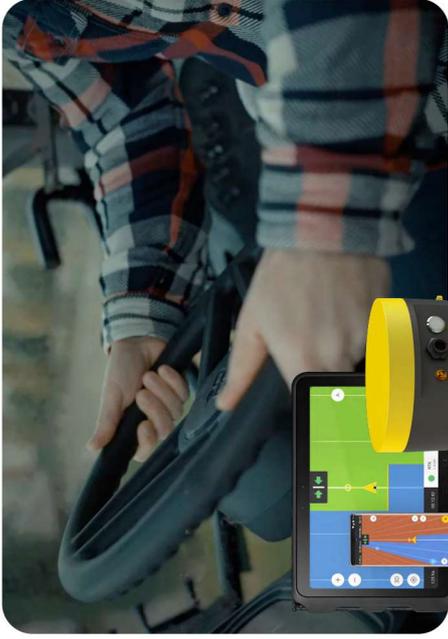

## PowerGuide Manual Steering System

|                                       |                                                                                              |
|---------------------------------------|----------------------------------------------------------------------------------------------|
| <b>Size</b>                           | ø150mm x 75mm                                                                                |
| <b>Power</b>                          | Supply Voltage 7-32V DC<br>(Cigarette Lighter Plug 3m)<br>Consumption 1A                     |
| <b>Environmental &amp; Compliance</b> | Controller-receiver: IP-67,<br>operating temperature<br>-20°C ~ 85°C, RoHS, CE, ISO<br>15003 |
| <b>GNSS Receiver</b>                  | Wireless interfaces LoRa<br>868 MHz / WiFi<br>RTK 0.01 m +<br>1 ppm CEP                      |



## PowerSteer™ Autosteering System

|                                       |                                                                                                           |
|---------------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>Size</b>                           | Steering wheel motor ø171mm x 65mm<br>Steering wheel ø400mm x 50mm                                        |
| <b>Power</b>                          | Supply Voltage 7-32V. DC<br>Consumption 10-15A. Rated torque<br>power 7-16 N.m. Rated speed<br>80-100 rpm |
| <b>Accuracy</b>                       | ±2.5 cm accuracy when<br>receiving RTK correction signal                                                  |
| <b>Environmental &amp; Compliance</b> | PowerSteer™ IP-55, operating<br>temperature -25°C ~ 55°C                                                  |



**FieldBee**  
precision for every farmer



Full  
product  
catalogue

## Add-ons



### RTK Base Station

Own RTK-signal helps to get up to 2.5 cm accuracy



### Dual Kit

For ultra low-speed operations



### Tablet Kit

A robust rugged tablet for in-cabin use with simplified connection



### ISO BUS

Available in 2025