



PRODUCT SPECIFICATIONS

MAYOTTE in-line motor



Important: Please fill out this form correctly and completely to ensure proper tracking of your order

Individual (Last Name, First Name) :

Ref. :

BUSINESS

COMPANY: INSTALLER

ADDRESS: ZIP : CITY:

PHONE: FAX: EMAIL:

Desired delivery week number: Subject to booking availability

POOL SPECIFICATIONS

LENGTH: M WIDTH: M YEAR BUILT: M

☐ MASONRY POOL ☐ PANEL(S) ☐ SHELL > SHELL REFERENCE: ☐ OTHER:




☐ RECTANGULAR POOL WITHOUT VISIBLE STEPS



☐ WITH A STRAIGHT STAIRCASE ACROSS THE WIDTH



☐ WITH A TRAPEZOIDAL STAIRCASE ACROSS THE WIDTH



☐ WITH AN OFFSET OR REVERSE STAIRCASE



☐ WITH A STAIRCASE ACROSS A WIDTH




☐ OTHER SHAPE, PROVIDE A TEMPLATE OR A PLAN PAGE 4

☐ INFINITY POOL

REQUIRED INFORMATION

☐ OVERFLOW ON THE RIGHT

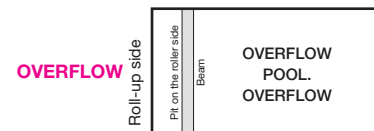


☐ OVERFLOW ON THE LEFT

Depth of the pool for the cover of the cover

INFORMATION ABOUT THE POOL

Option: for window cutout for skimmer or return (draw a diagram showing the placement of the parts to be sealed on the sketch page)

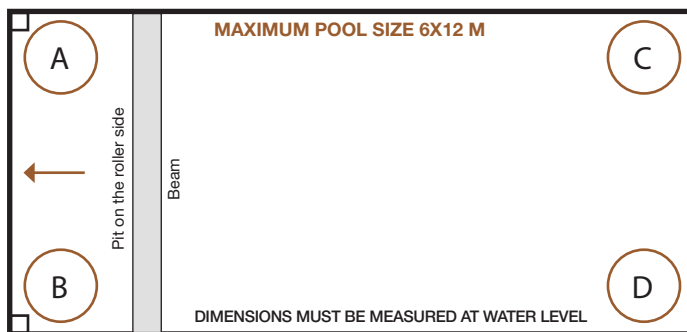

> POOL DIMENSIONS

(IN CM)	
AC	
BD	
AB	
CD	

> THE DIAGONALS

(IN CM)	
AD	
BC	

> DIMENSIONS

THE WIDTH OF THE POOL IS MEASURED EVERY METER STARTING FROM A TO C

POOL WIDTH (IN METERS)	
AB + 1 m	
AB + 2 m	
AB + 3 m	
AB + 4 m	
AB + 5 m	
AB + 6 m	
AB + 7 m	
AB + 8 m	
AB + 9 m	
AB + 10 m	
AB + 11 m	
AB + 12 m	

> SKIMMERS

IF SKIMMERS ARE INSTALLED ALONG THE LENGTH, INDICATE THEIR LOCATION AND THE THICKNESS OF THE FLANGE. UNLESS OTHERWISE SPECIFIED, WE WILL ASSUME THEY ARE NOT LOCATED ALONG THE LENGTH.

> CORNERS

	Sharp corner	Rounded (in cm)	Chamfer (in cm)	X1	X2	FINISH
A	☒	☐	☐	☐	☐	right-angled
B	☒	☐	☐	☐	☐	with shaped fins
C	☐	☐	☐	☐	☐	
D	☐	☐	☐	☐	☐	

> LINING

Liner ☐

150/100th ☐

Polyester ☐

Tiled ☐

IF APPLICABLE, PROVIDE THE MISSING MEASUREMENTS THE DIMENSIONS REQUESTED ARE THOSE AT THE WATERLINE OF THE POOL, NOT THOSE OF THE DESIRED FINISHED SLATS. WE DEFINE THESE DIMENSIONS IN THE FACTORY DURING MANUFACTURING TO COMPLY WITH STANDARD NF P 90-308



PRODUCT SPECIFICATIONS

MAYOTTE in-line motor



Important: Please fill out this form correctly and completely to ensure proper tracking of your order

Individual (Last Name, First Name) :

Ref. :



MODELS

☐ With injection-molded flanges and



Pre-installed mounting kit

Yes ☐ No ☐

If not: Wall bushing
Electrical cable passage

Yes ☐ No ☐

☐ With round bearings



Pre-installed mounting kit

Yes ☐ No ☐

If not: Wall bushing
Electrical cable passage

Yes ☐ No ☐

Specifications:

Round bearing kit Yes ☐ No ☐

For beams Yes ☐ No ☐

OPTIONS

Bluetooth smartphone app

☐

Wireless remote switch for opening/closing the cover

☐

Drilling template at desired actual scale

Yes ☐ No ☐

SLATS

Curved PVC
83 mm



☐

Fins: Fixed ☐
Adjustable (optional) ☐

☐ White ☐


☐ Light gray ☐

☐ Gray ☐

☐ Sand ☐

☐ Taupe ☐

Flat PVC
75 mm



☐

Fixed tips
+ 20 mm fixed fins

☐ White ☐

☐ Light gray ☐

☐ Gray ☐

☐ Sand ☐

☐ Taupe ☐

Two-tone flat
83 mm



☐

Fixed gray end caps
+ 30 mm fixed fins

☐ White/Sand ☐

☐ Light Gray/Gray ☐

Polycarbonate*
70 mm



☐

Adhesive end caps
+ black clip-on fins

☐ Smoked - Black ☐

☐ Pearl gray - Black ☐

☐ Blue - Black ☐

*Not recommended for pools treated with bromine

Options



Beach anti-lift kit

☐



Bracket for anti-lift buckle under coping

☐

GRATING (500 MM SECTIONS)

Not cut to the width of the pool

CERAMIC SANDSTONE



Width 600 mm

Max. length 900 mm

Max. length 1200 mm

Custom-made grating mm

1000 x 1000 mm

☐ ☐ ☐ ☐
☐ ☐ ☐ ☐
☐ ☐ ☐ ☐

SOLID DRAPING COMPRESSED PVC



☐

DIVIDERS

Installation
with masonry wall

☐

The decking
covers the wall

Yes ☐ No ☐

Installation
with a prefabricated partition

☐



PRODUCT SPECIFICATIONS

MAYOTTE in-line motor



Important: Please fill out this form correctly and completely to ensure proper tracking of your order

Individual (Last Name, First Name) :

Ref. :

PARTITION

(300 mm sections) 6 cm less than the pool width on the pit side

White ☐ Black ☐
Light gray ☐ Sand ☐
Gray ☐

Max pool width 4.50 m (contact us for other widths)

SLIDES

U-shaped rails

White ☐ Black ☐
Light gray ☐ Sand ☐
Gray ☐

PIT

Specify dimensions in the pit flap


Pool width =

Pool height =

Wall or partition height =

Wall thickness =

SPECIFICATIONS FOR STAIRS



Right-angle cut


☐

Shaped cut


(except two-tone flat slats and polycarbonates)

☐


> STRAIGHT STAIRCASE

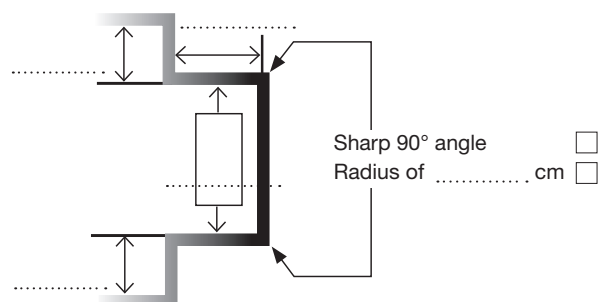

> TRAPEZOIDAL STAIRCASE

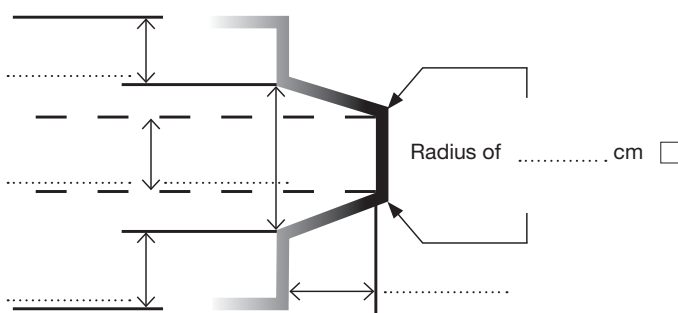


> ROMAN STAIRCASE

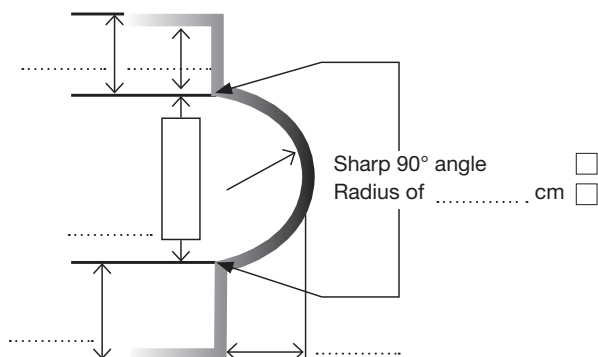

Divide the semicircle of the staircase into 8 equal parts.
Record the dimensions of: (e.g., from 1 to 4; from 4 to 9...)

If the radius is not constant, record the measurements according to the table to be completed or provide a template

Radius of cm



1/2	cm
2/9	cm
1/3	cm
3/9	cm
1/4	cm
4/9	cm
1/5	cm
5/9	cm
1/6	cm
6/9	cm
1/7	cm
7/9	cm
1/8	cm
8/9	cm
1/9	cm

DELIVERY

Name and phone number to provide to the driver for delivery:

Mr./Ms.:

Tel. :

Delivery address:

Mr./Ms.:

Address:

Code:

City:

Tel. :

Date:

Name:

Signature:

> PACKAGING

Cardboard ☐

(max. dimensions 5.10 x 12 m, otherwise wooden crate)

Wooden crate ☐

> ACCESS CONDITIONS

Weight restriction Yes ☐ No ☐

If yes, how much

Height restriction Yes ☐ No ☐

If yes, how much

> UNLOADING

ARRANGE FOR PERSONNEL TO ASSIST WITH UNLOADING

Access possible with a semi-trailer Yes ☐ No ☐

Surcharge for flatbed (7m deck) Yes ☐ No ☐

Surcharge for onboard trolley Yes ☐ No ☐



PRODUCT SPECIFICATIONS

MAYOTTE in-line motor



Important: Please fill out this form correctly and completely to ensure proper tracking of your order

Individual (Last Name, First Name) :


Ref. :

**For a pool configuration different from the one shown above,
please sketch your pool design below.**

Examples: triangulation dimensions, differently positioned steps, geometric shapes...

Please provide as much information as possible to help us design your cover: roller position, dimensions, corner radii, stairs...

*Examples of dimensions
required*

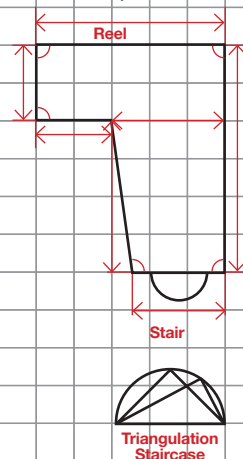

1m