



Rental services for specialized foundation engineering with fixed-price expertise. www.borama.rent



TM 13 – SR 20 F

ABI MOBILRAM PILE DRIVER

Technical data

TM 13 – SR 20 F**ABI MOBILRAM PILE DRIVER**


Kelly Drilling

CFA
Continuous
Flight Auger DrillingFDP
Full Displacement PilingFoW
Front of Wall

Bio-oil



Low Headroom

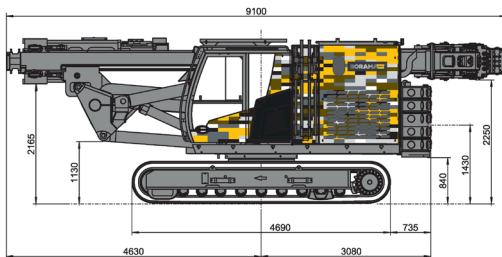Transport positionComplete
data sheet**TM 13 – SR 20 F****Leader mast**

Leader mast slewing range	100/90 degree
Stroke guiding carriage	13,500 mm
Feed force up/down mast cylinder 1	180/100 kN
Feed force up/down mast cylinder 2	180/100 kN
Torque absorption max.	60 kNm
Max. load capacity	7,000 kg
Docking-System	D6 / 4

Auxiliary winch

Line pull	14 kN
-----------	-------

Attachments

Vibrator	16 VV
----------	-------

Base carrier SR 20 F


Engine	CUMMINS B6.7
Rated output	209 kW
Exhaust emission	Stage V / Tier 4 final
Hydraulic pressure	350 bar

Under carriage T21/300


Transport width	2,500 mm
-----------------	----------

Transport weights

Machine without counterweight	32.4 t
Counterweights (5x 1.5 t)	7.5 t

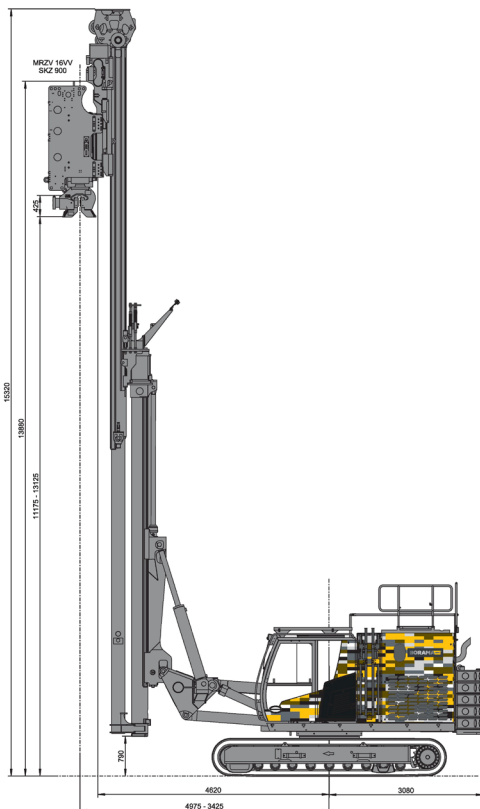

Rental services for specialized
foundation engineering
with fixed-price expertise.

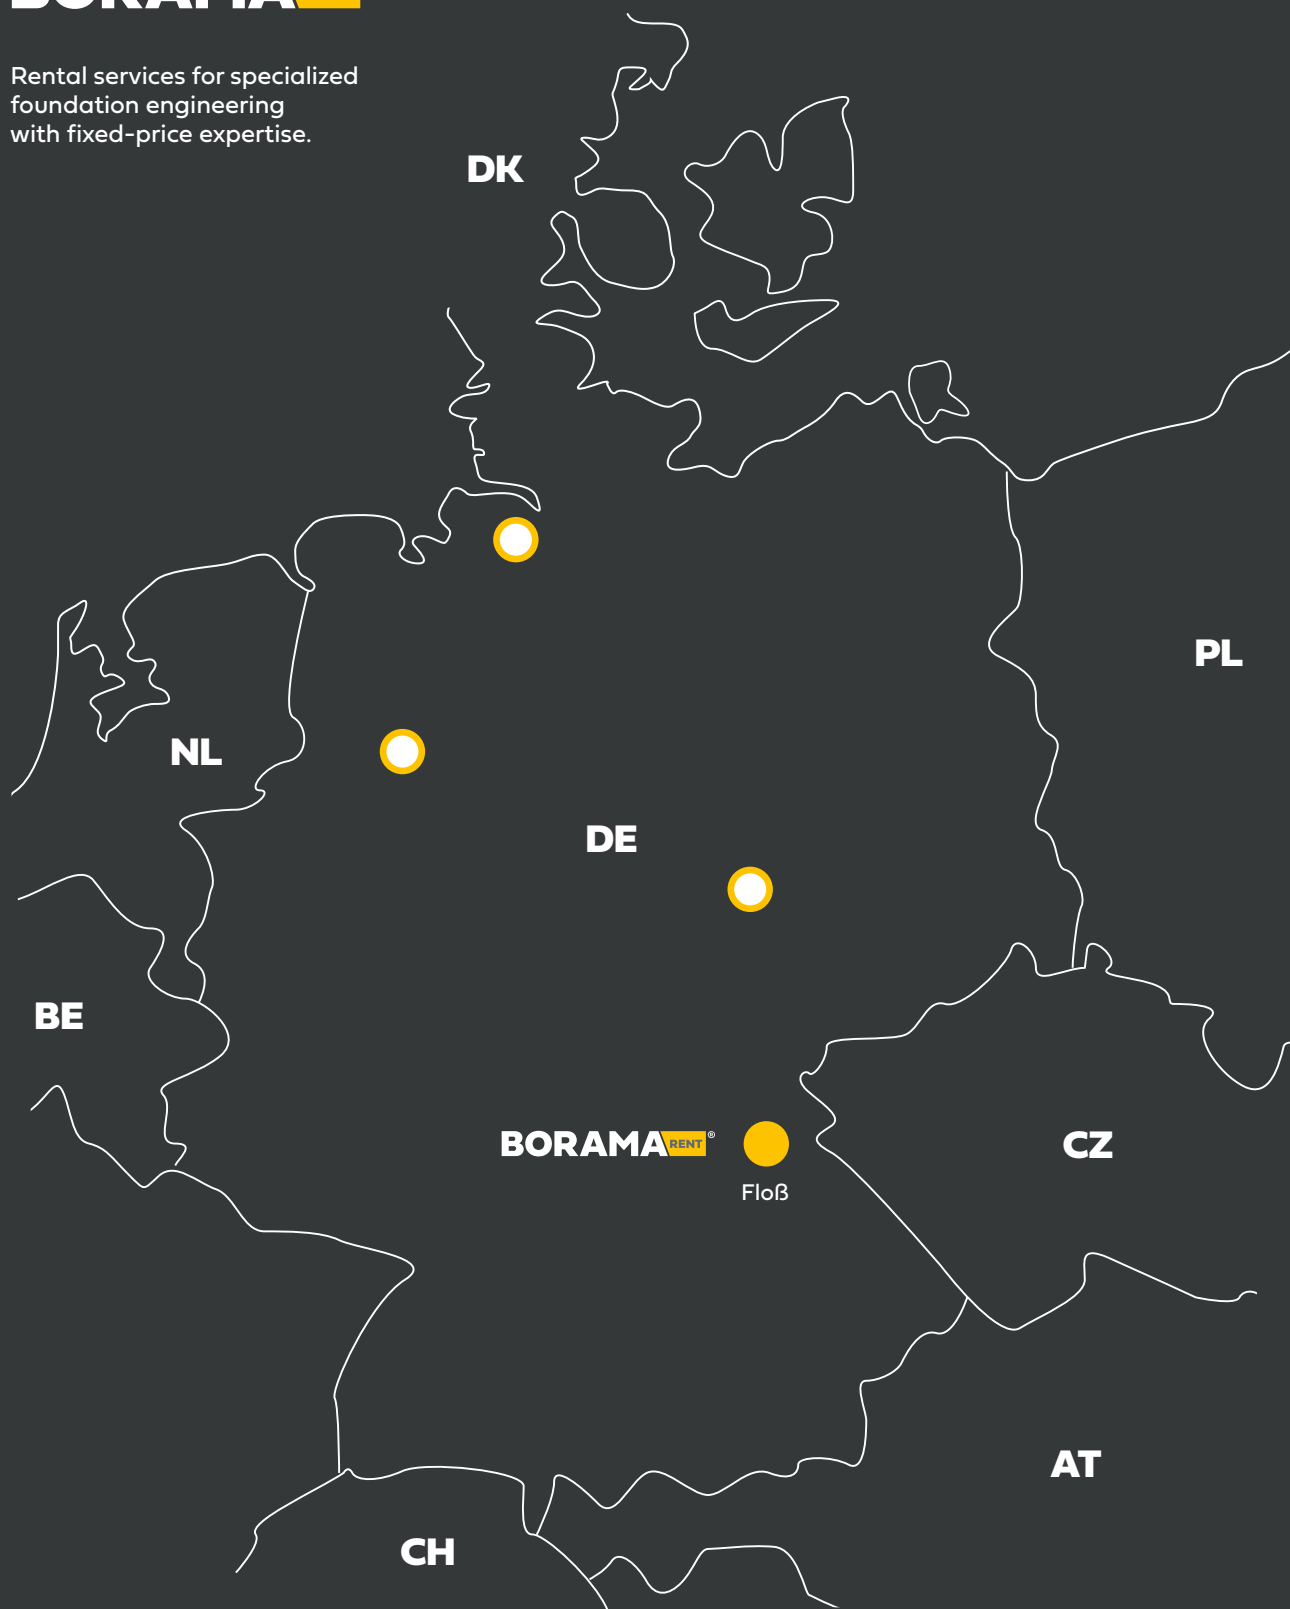

BORAMA Rent GmbH
Neustädter Straße 27
92685 Floß

+49 9603 903 163-0

info@borama.rent
www.borama.rent

Efficient, close by.

-  Headquarters
-  Service locations