



Rental services for specialized foundation engineering with fixed-price expertise. www.borama.rent



TM 16 – SR 30 F

ABI MOBILRAM PILE DRIVER

Technical data

TM 16 – SR 30 F

ABI MOBILRAM PILE DRIVER



Kelly Drilling



CFA
Continuous
Flight Auger Drilling



FDP
Full Displacement Piling



FoW
Front of Wall




Bio-oil



Low Headroom

Transport position

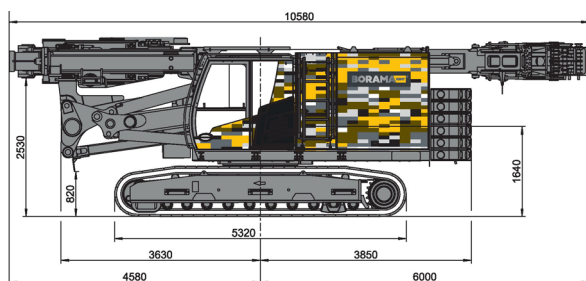


Complete
data sheet




TM 16 – SR 30 F

Leader mast	
Leader mast slewing range	94 degree
Stroke guiding carriage	16,700 mm
Feed force up/down mast cylinder 1	220/150 kN
Feed force up/down mast cylinder 2	220/150 kN
Torque absorption max.	60 kNm
Max. load capacity	9,000 kg
Docking-System	D6
Auxiliary winch	
Line pull	50 kN
Attachments	
Vibrator	20 VV
Base carrier SR 30 F	
Engine	CT C 9.3B
Rated output	340 kW
Exhaust emission	Stage V / Tier 4 final
Hydraulic pressure	350 bar
Under carriage T31/350	
Transport width	3,000 mm
Transport weights	
Machine without counterweight	43.4 t
Counterweights (6x 1.6 t)	9.6 t

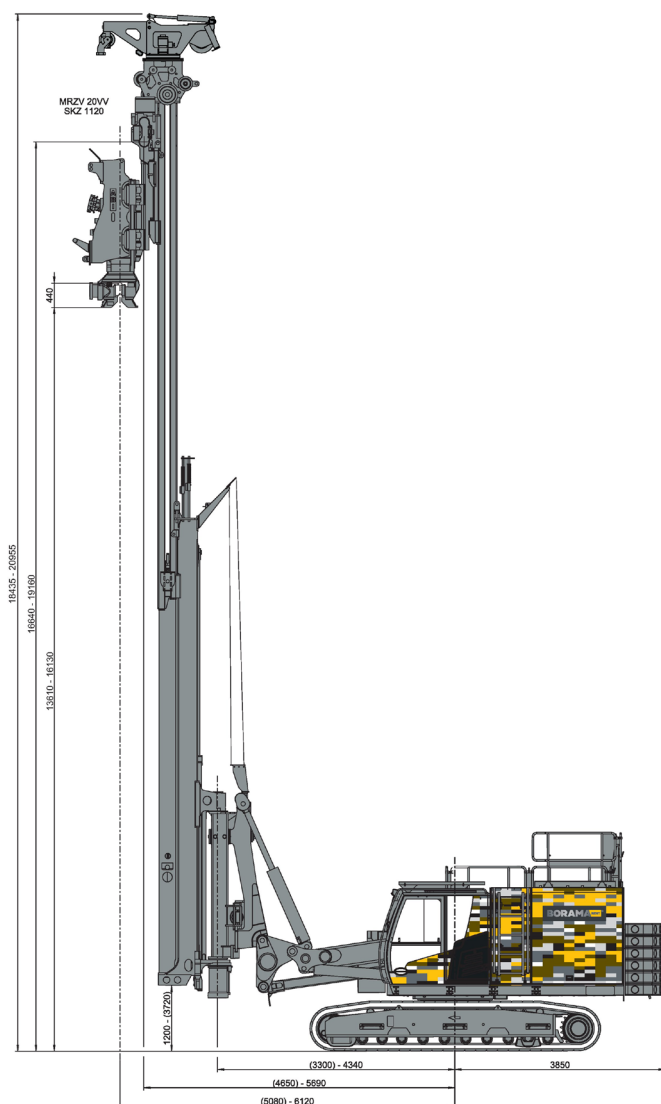

Rental services for specialized
foundation engineering
with fixed-price expertise.

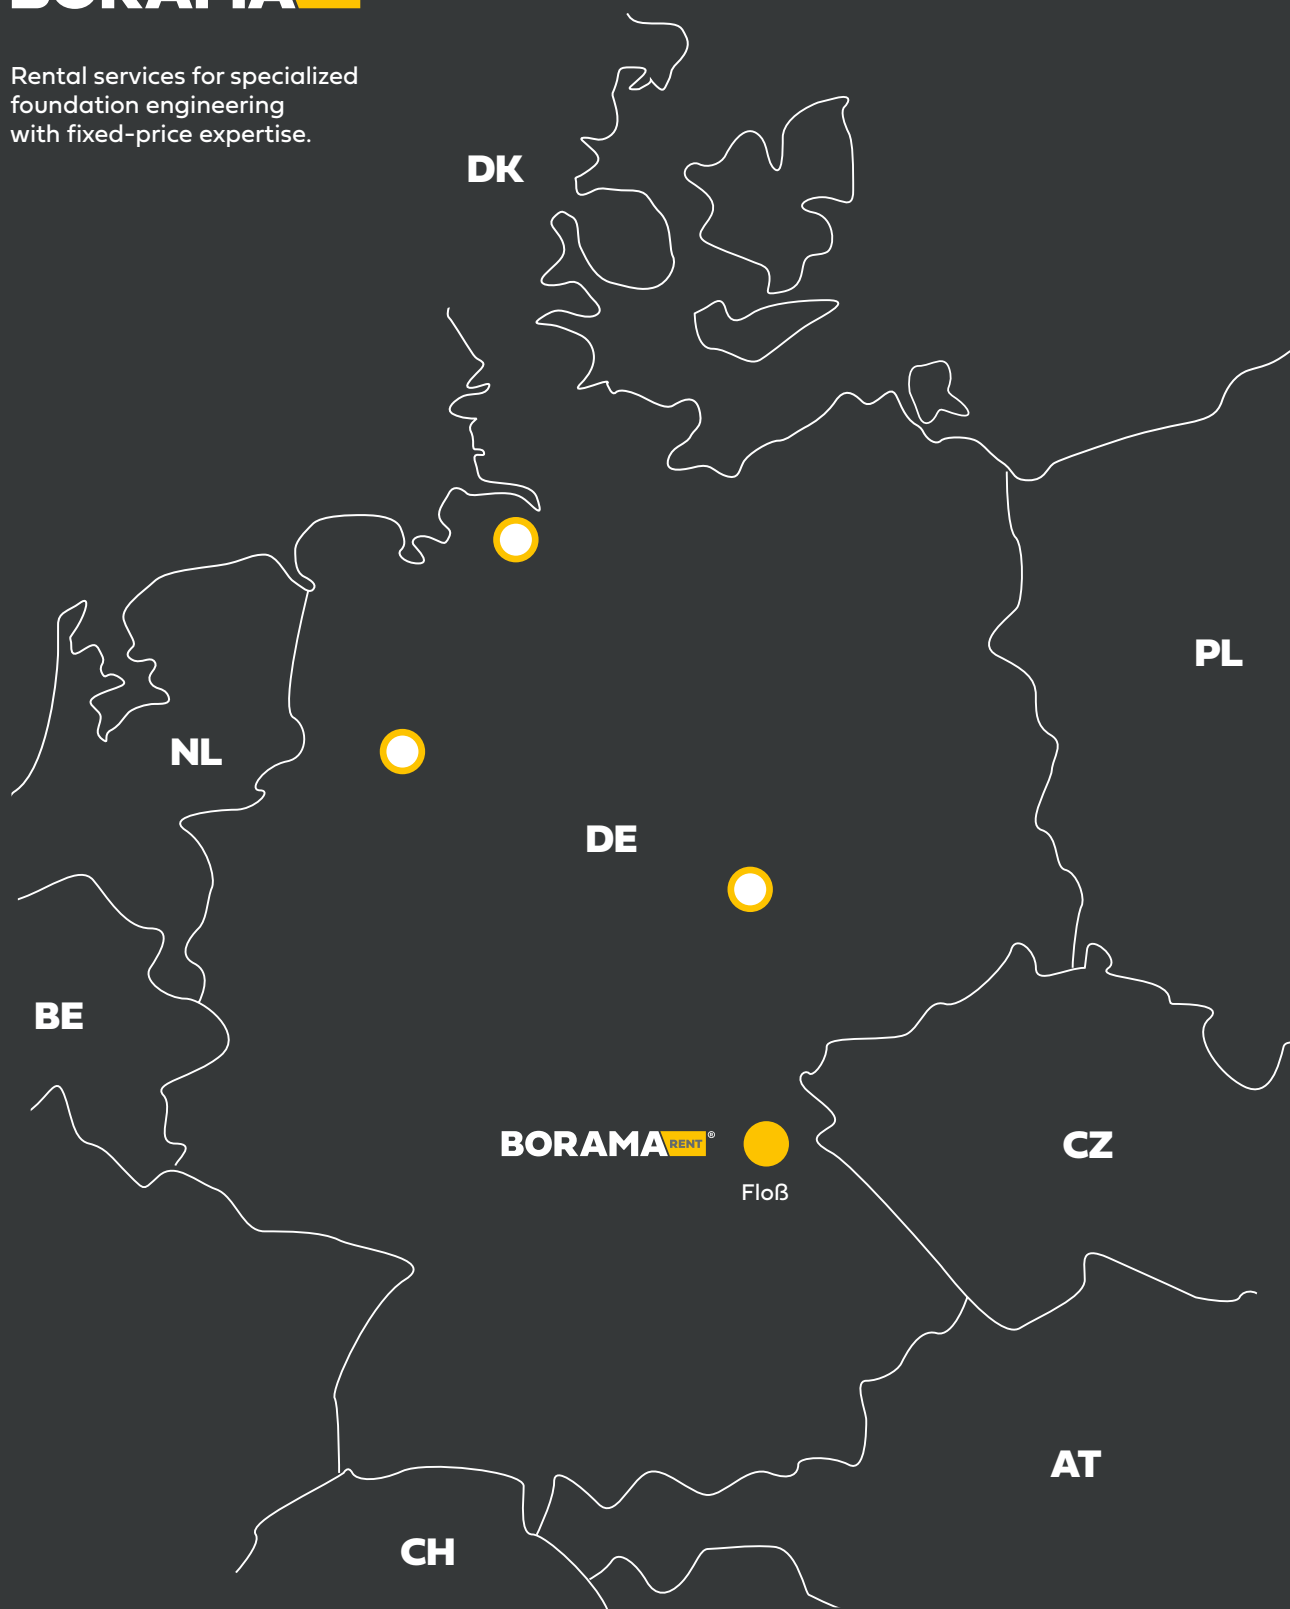

BORAMA Rent GmbH
Neustädter Straße 27
92685 Floß

+49 9603 903 163-0

info@borama.rent
www.borama.rent

Efficient, close by.

-  Headquarters
-  Service locations