



Rental services for specialized foundation engineering with fixed-price expertise. www.borama.rent



TM 22 – SR 35 F

ABI MOBILRAM PILE DRIVER

Technical data

TM 22 – SR 35 F**ABI MOBILRAM PILE DRIVER**

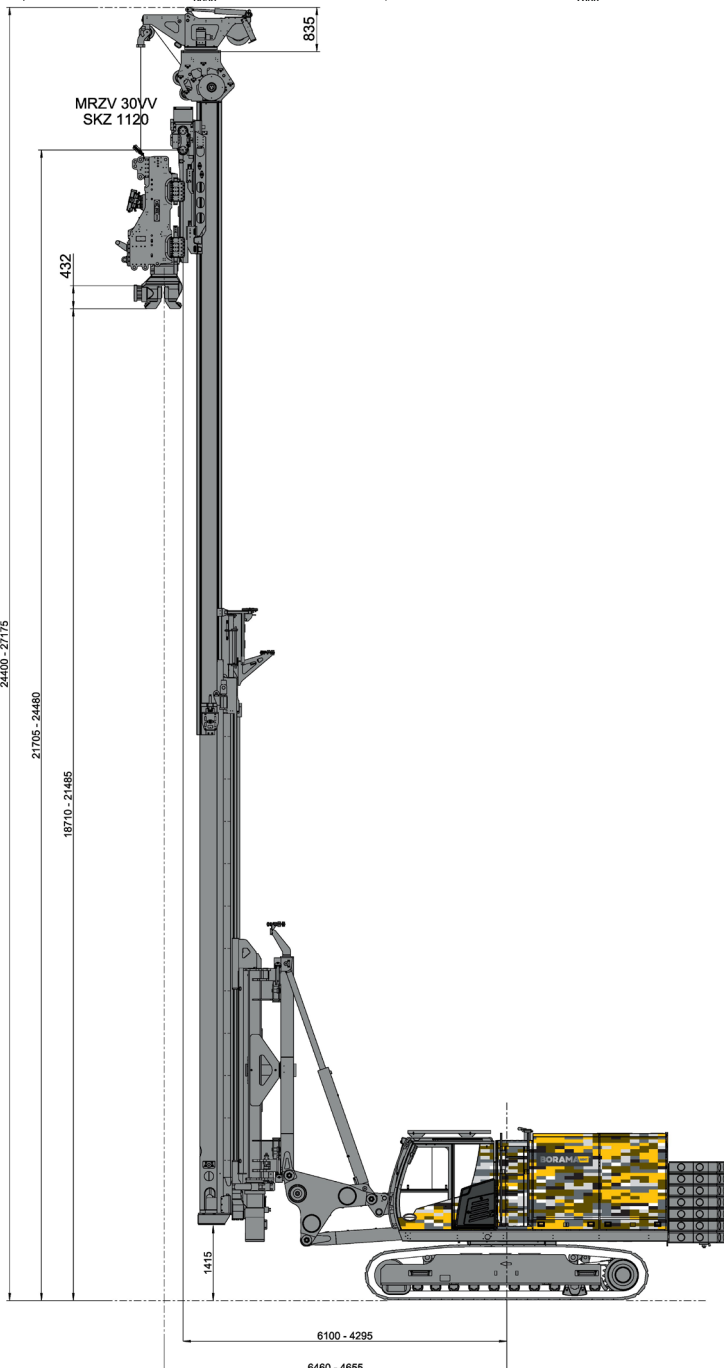
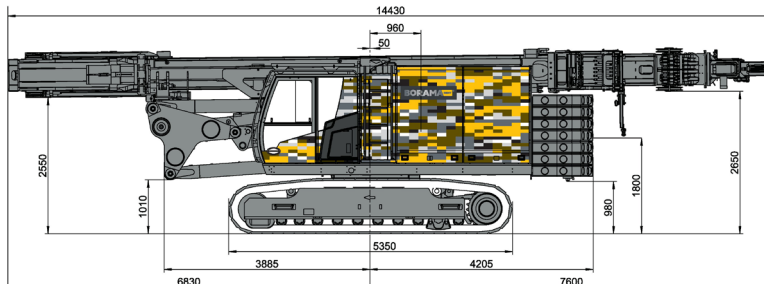
Kelly Drilling

CFA
Continuous
Flight Auger DrillingFDP
Full Displacement PilingFoW
Front of Wall

Bio-oil



Low Headroom

Transport positionComplete
data sheet**TM 22 – SR 35 F****Leader mast**

Leader mast slewing range	95 degree
Stroke guiding carriage	22,000 mm
Feed force up/down mast cylinder 1	250 / 165 kN
Feed force up/down mast cylinder 2	275 / 170 kN
Torque absorption max.	200 kNm
Max. load capacity	15,000 kg
Docking-System	D6

Auxiliary winch

Line pull	50 kN
-----------	-------

Attachments

Vibrator	30 VV
----------	-------

Base carrier SR 35 F

Engine	CAT C 18
Rated output	470 kW
Exhaust emission	Stage V / Tier 4 final
Hydraulic pressure	330 bar

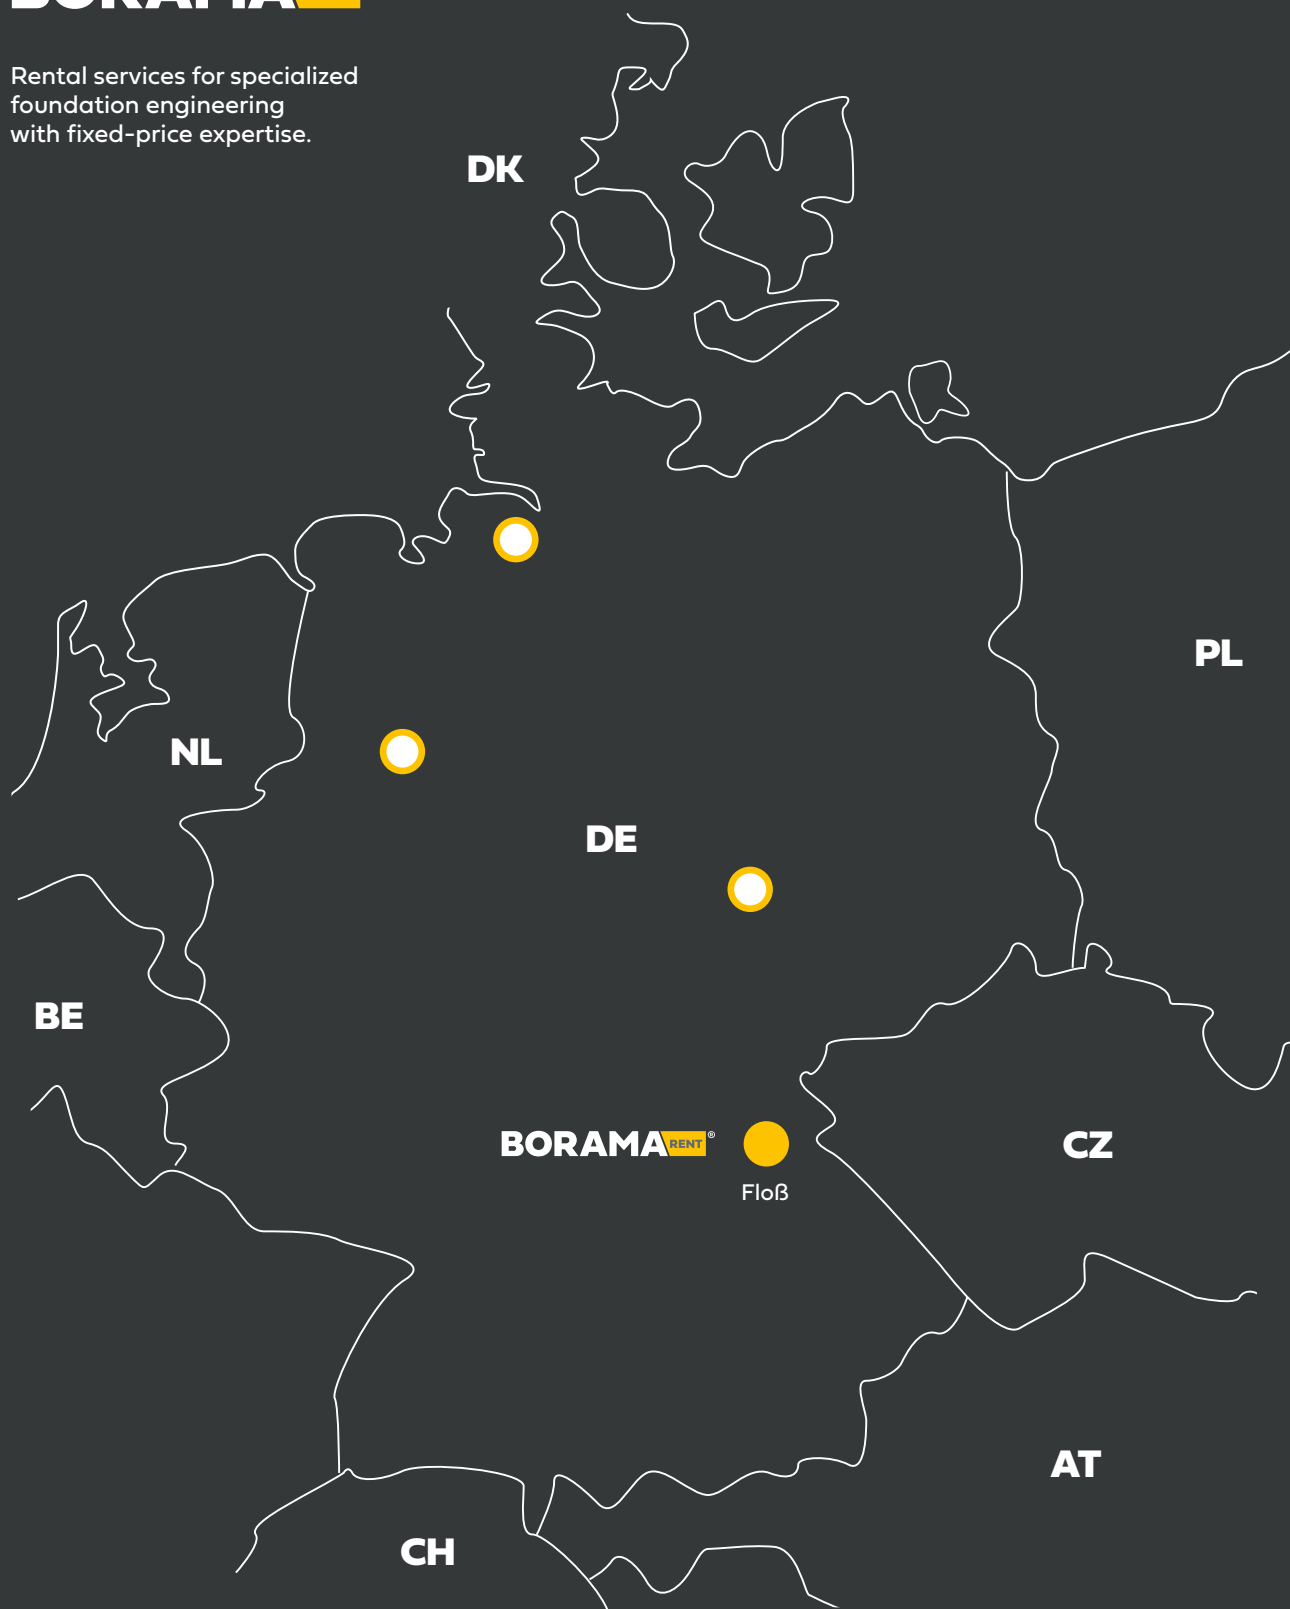
Under carriage T41/380-V

Transport width	3.000 mm
-----------------	----------

Transport weights

Machine without counterweight	60.45 t
Counterweights (7x 2.45 t)	17.15 t

Rental services for specialized
foundation engineering
with fixed-price expertise.



BORAMA Rent GmbH
Neustädter Straße 27
92685 Floß

+49 9603 903 163-0

info@borama.rent
www.borama.rent

Efficient, close by.

-  Headquarters
-  Service locations