


# Hydraulic Driven Reciprocating & Rotary Screw Compressors

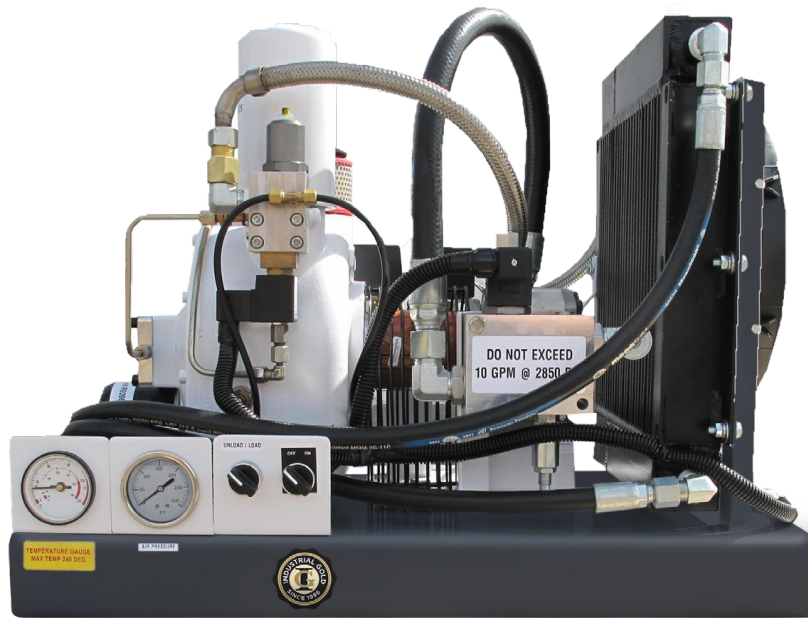

No Start Up Kits Required | Lifetime Part Warranty Available

## Industrial Gold

Quality Air Compressors at a Great Price.

industrialgold.com ■ 1-800-531-9656 ■ Fax 972-352-6364

© Industrial Gold



Scan to visit our website



# Reciprocating Compressors

## Features

- Heavy duty industrial reciprocating compressor pump
- Intake filter silencer
- Disc & spring valves
- Hydraulic fluid flow regulator
- Hydraulic fluid pressure regulator
- Hydraulic fluid bypass valve
- Steel mounting plate
- External on/off switch
- All hydraulic fluid and air connections in 1 place
- Easy to remove compressor cover
- Low rpm compressor pump
- 12 volt control system\*
- Load/unload operation
- IG SMART fluid control
- System vibration mounting pads
- ASME/CRN certified safety valves

## Options

- Cover color change
- Compressed air cooler
- Tank mounted
- Hydraulic fluid auxiliary cooler
- 24 Volt control operation
- 110 Volt control operation
- Cold weather heating package
- High ambient temperature cooling package



Model	CFM @ 100 PSI	CFM@150 PSI	Hydraulic PSI Required	GPM Hydraulic Fluid Required
H-BM22	24	22	2250	10
H-BM40	45	40	2250	13
H-BM60	65	40	2250	18
H-BM120	130	125	2250	29

\*Control voltage connection to be supplied from vehicle or equipment compressor is mounted to.  
Do not let Hydraulic Fluid exceed 190°F


# Rotary Screw Compressors

## Features:

- Heavy duty industrial rotary screw airend
- Hydraulic fluid flow regulator
- Hydraulic fluid pressure regulator
- Hydraulic fluid bypass valve
- Steel mounting plate
- External on/off switch
- All hydraulic fluid and air connections in 1 place
- Easy to remove compressor cover
- 12 volt control system\*
- Load/unload operation
- IG SMART fluid control
- System Vibration mounting pads
- ASME/CRN certified safety valves
- Spin-on oil filter & separator

## Options:

- Cover color change
- Compressed air cooler
- Tank mounted
- Hydraulic fluid auxillary cooler
- 24 Volt control operation
- 110 Volt control operation
- Cold weather heating package
- High ambient temperature cooling package

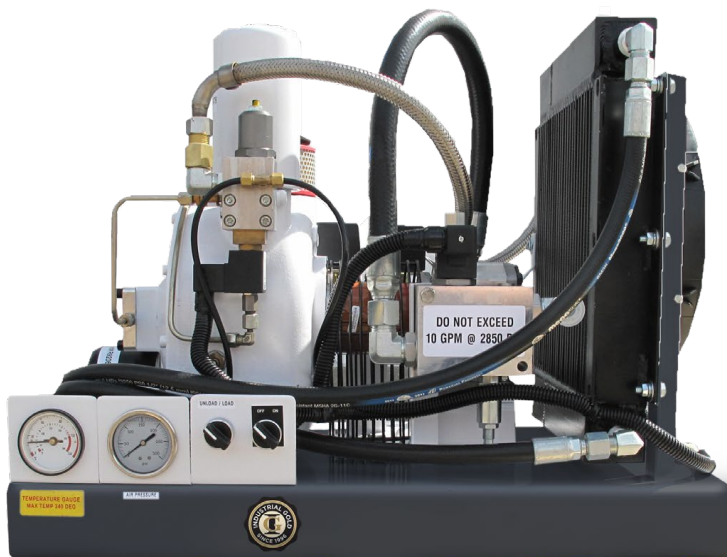

Model	CFM @ 100 PSI	CFM @ 150 PSI	Hydraulic PSI Required	GPM Hydraulic Fluid Required
H-BM40RS	45	40	2250	13

\*Control voltage connection to be supplied from vehicle or equipment compressor is mounted to.  
Do not let Hydraulic Fluid exceed 190°F



**Quality Air Compressor at a Great Price.**

600 S. 2nd Ave  
Mansfield, TX, 76063  
417-206-6353  
800-531-9656