




DWG NO: 00-005-0019

REVISIONS

ECO	REV	DESCRIPTION	DATE	APPROVED
	A	RELEASE	7/30/09	WC
	B	ADDED SOCKET/RECEPTACLE TO DRAWING	1/24/14	WC

1. ALL TOLERANCES ± 0.010 " UNLESS OTHERWISE SPECIFIED
2. CONNECTOR INTERFACE PER MIL-DTL-83513/8 (PLUG CLASS P CRIMP TYPE)
3. MATERIAL:
 - A) INSULATOR: POLYPHENYLENE SULFIDE (RYTON).
 - B) SHELL: ALUMINUM ALLOY 6061-T6 HARD ANODIZED COLOR: BLACK.
 - C) CONTACT:
 - 1) BASE MATERIAL:
 - a) PIN: BERYLLIUM COPPER PER C17410
 - b) SOCKET: LEADED COMMERCIAL BRONZE PER C31400
 - 2) PLATING: GOLD OVER NICKEL, 50 TO 150 MICROINCHES PER MIL-G-45204, TYPE II, GRADE C, CLASS 1.
 - D) EPOXY: HI-TEMPERATURE, 200°C.
 - E) WIRE: AS SPECIFIED BY PART NUMBER
 - F) JACKSCREW: 300 SERIES STAINLESS STEEL, PASSIVATED.
4. CONNECTOR RATED TO 200°C.

DNBR-XX X X X X - XX.0 H /01

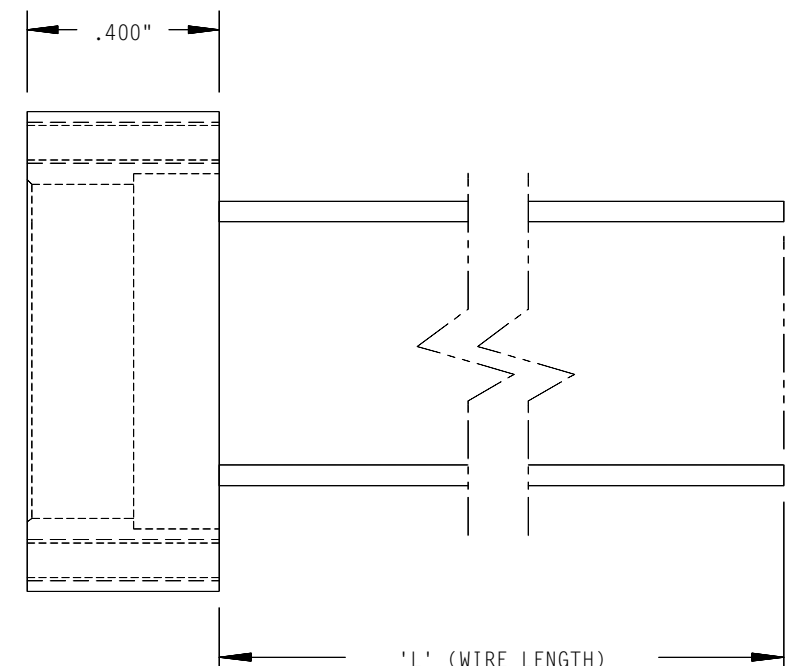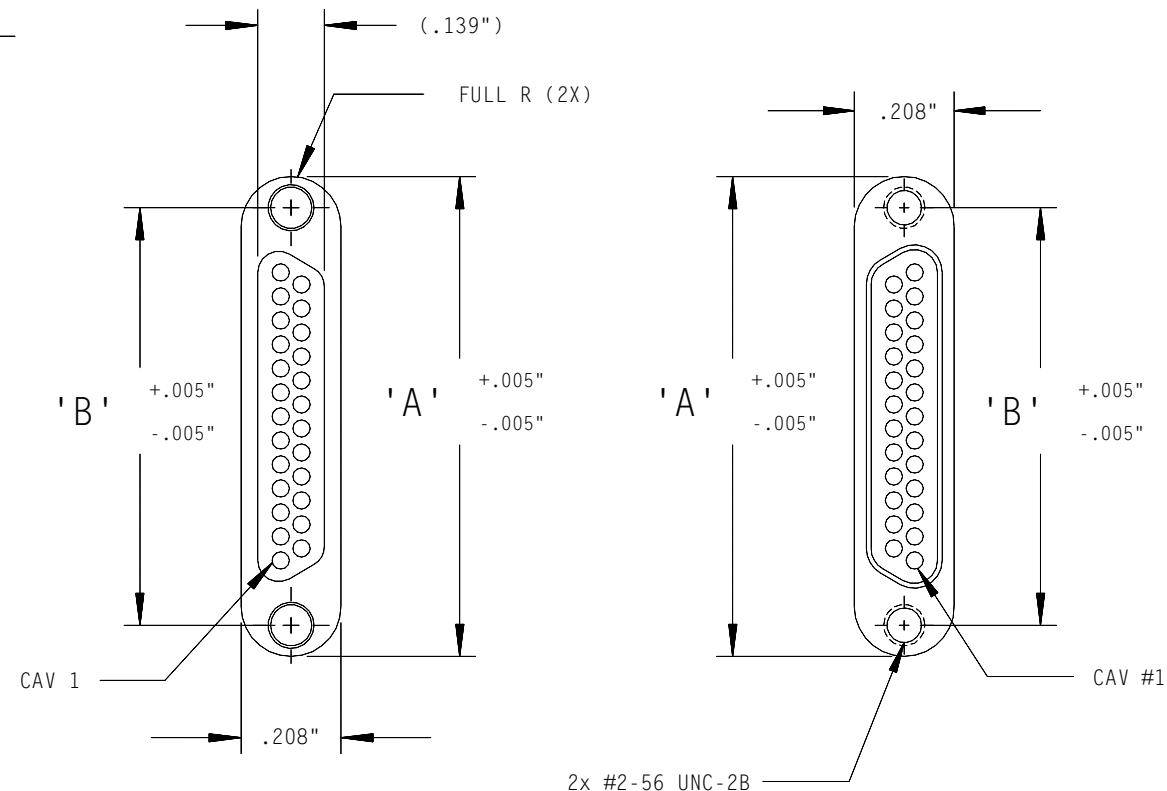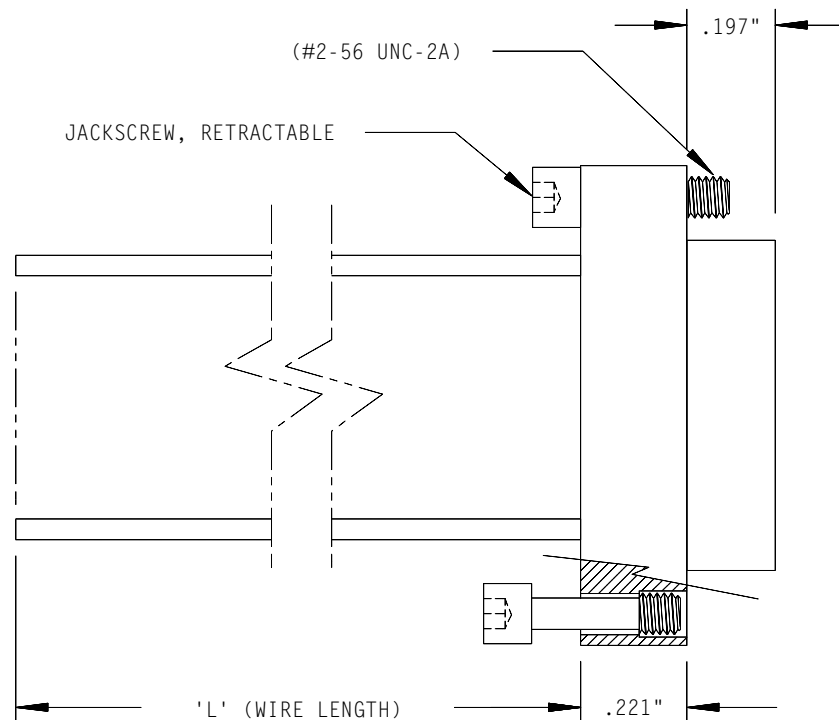

CONN SIZE	A	B
9	0.600	0.470
15	0.750	0.620
21	0.900	0.770
25	1.000	0.870
31	1.150	1.020
37	1.300	1.170

INTENDED USE CUSTOMER USE				17312 EASTMAN IRVINE, CA 92614	
REFERENCE				DWG TITLE	
SIGNATURES		DATE		DNBR SERIES, LOW PROFILE CABLE/WIRE MOUNT	
DRAWN		7/30/09			
CHARETTE					
CHECKED WC	7/30/09	SIZE B	FSCM NO. 54455	DWG NO. 00-005-0019	REV B
APPROVED WC	7/30/09	SCALE NONE		SHEET 1 of 1	