


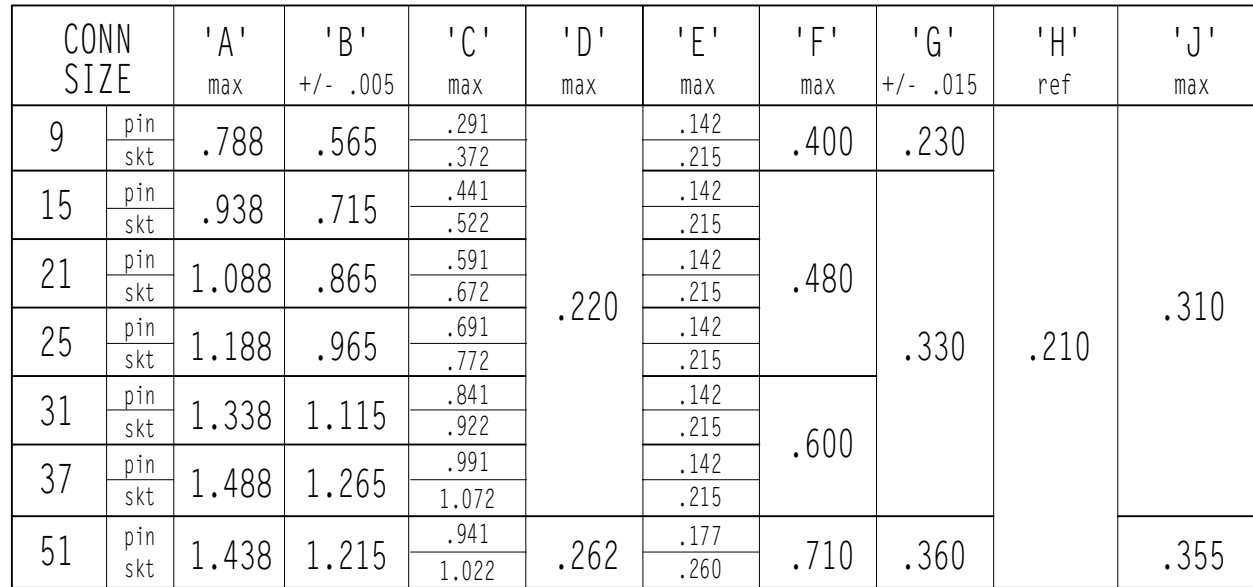

D S R - 25 P CBR P T - .XXX XX

NOTES:


1. MATERIAL:
 - a) INSULATOR: POLYESTER OR POLYPHENYLENE SULFIDE.
 - b) TERMINATION BOX: POLYPHENYLENE SULFIDE.
 - c) CONTACT: GOLD PLATED COPPER.
 - d) TERMINATION WIRE: 24 AWG SOLID COPPER TIN PLATED.
 - e) EPOXY: HYSOL EE4198.
 - f) HARDWARE: 300 SERIES STAINLESS STEEL.
2. FOR PERFORMANCE DATA AND DIMENSIONS NOT SHOWN, REFER TO THE 'D' SERIES SECTION IN THE MIN-E-CON CATALOG.

INTENDED USE CUSTOMER USE				17312 EASTMAN			
REFERENCE				IRVINE, CA 92614			
		DWG TITLE					
SIGNATURES		CONNECTOR, MICRO 'D' ALL PLASTIC STD PROFILE RT ANGLE PC MT					
DATE							
DRAWN CHARETTE		7/27/10					
CHECKED WC		7/27/10		SIZE B	FSCM NO. 54455	DWG NO. 00-005-0024	REV A
APPROVED WC		7/27/10		SCALE NONE		SHEET 1 OF 2	

THIS IS ISSUED IN STRICT CONFIDENCE ON THE
CONDITION THAT IT IS NOT USED AS A BASIS FOR
MANUFACTURE OR SALE, AND THAT IT IS NOT COPIED,
REPRINTED OR DISCLOSED TO ANY THIRD PARTY
WITHOUT THE PRIOR WRITTEN CONSENT OF MIN-E-CON

UNLESS OTHERWISE
SPECIFIED ALL DIMENSIONS
ARE IN INCHES DRAWING
STANDARDS ARE PER
ANSI Y14.5M-1982


THIRD ANGLE PROJECTION




VIEW A

CIRCUIT ID NUMBERS ARE SHOWN FOR REFERENCE
ONLY AND DO NOT APPEAR ON PART


REVISIONS				
ECO	REV	DESCRIPTION	DATE	APPROVED
	A	SEE SHEET I		

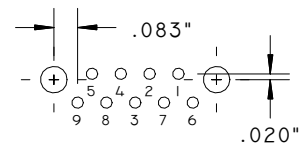


9 PIN

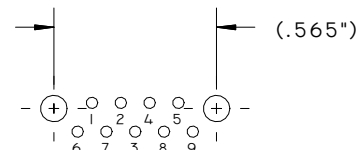


9 SOCKET

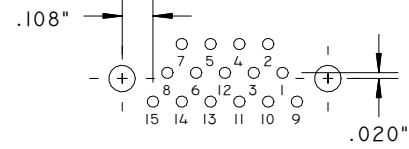


15 PIN

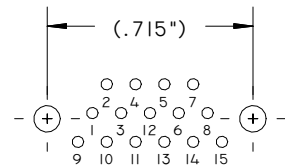


15 SOCKET

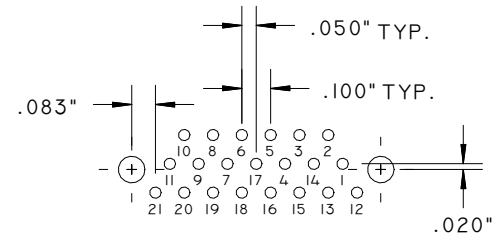


21 PIN

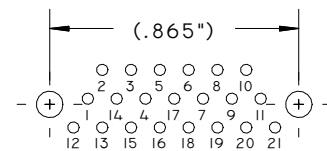


21 SOCKET

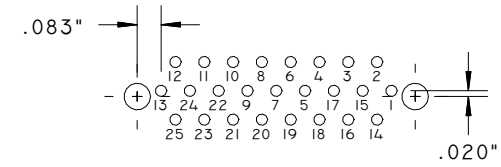


25 PIN

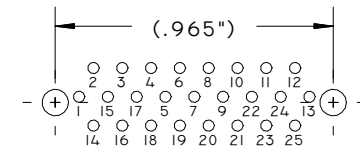


25 SOCKET

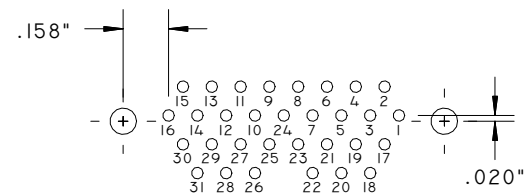


31 PIN

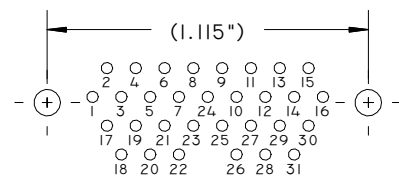


31 SOCKET

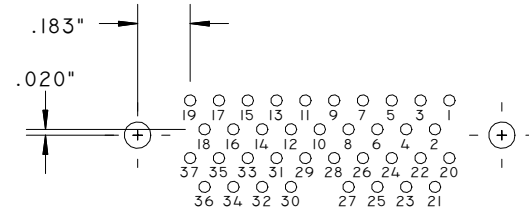


37 PIN

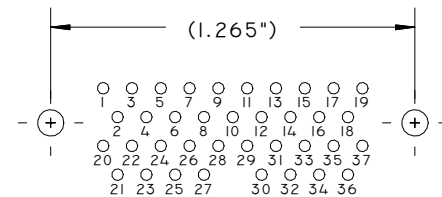

37 SOCKET

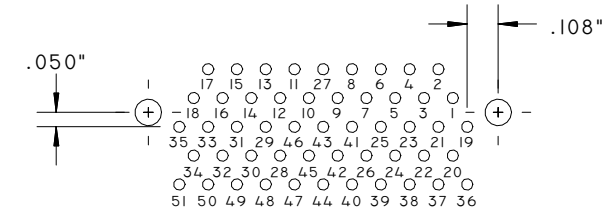

51 PIN

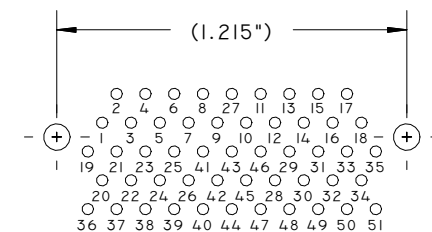

51 SOCKET

NOTES:

SEE SHEET I FOR NOTES.

INTENDED USE CUSTOMER USE				17312 EASTMAN	
REFERENCE				IRVINE, CA 92614	
SIGNATURES		DATE		DWG TITLE	
DRAWN CHARETTE		7/27/10		CONNECTOR, MICRO 'D' ALL PLASTIC STD PROFILE RT ANGLE PC MT	
CHECKED WC	7/27/10	SIZE B	FSCM NO. 54455	DWG NO. 00-005-0024	REV A
APPROVED WC	7/27/10	SCALE NONE		SHEET 2 OF 2	