



Sample 24-400 Side by Side

- » Built to UL 508A standards
- » Right hand or left hand hinge
- » May be rated at 400 amp, 600 amp or 800 amp
- » Small, low-profile and attractive with no exposed fasteners
- » Self-contained
- » Meets EUSERC Requirements (Electric Utility Service Equipment Requirements Committee)

TESCOFLEX[®] low-profile, high amperage, underground service distribution pedestals are used for a wide variety of municipal applications. The 24-400 TESCOFLEX[®] low-profile pedestal provides power distribution and metering rated to 480 volts; single phase or three phase applications; 2 or 3 pole main breakers; and may be rated at 400 amp, 600 amp or 800 amp.

TESCOFLEX[®] pedestals are constructed of the highest grade materials using hot-dipped galvanized steel, stainless steel, or aluminum. Our coatings will withstand the most stringent testing applied to outdoor enclosures and meet or exceed state specifications. The wide range of options we can provide will allow for maximum utilization of your space.

Call us and see for yourself how Tesco Controls can make a difference on your next project.

Applications



- » Storm Water Lift Stations
- » Wastewater Lift Stations
- » Water Pumping Plants

Features

- » Low Profile
- » No exposed fasteners
- » Hot-dipped galvanized, aluminum or stainless steel
- » Durable all-welded construction
- » UL approved copper cable bussing and control wiring
- » Circuit breakers cable-in cable-out type
- » Factory wired and tested before shipment
- » Meets EUSERC requirements (Electric Utility Service Equipment Requirements Committee)
- » Built to UL 508A Standards
- » Pad-lockable 3-pt latch

Component Options

- » Breakers
- » Generator receptacles
- » Single or dual meter

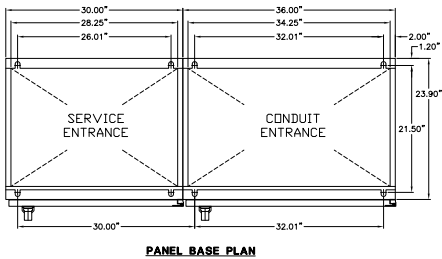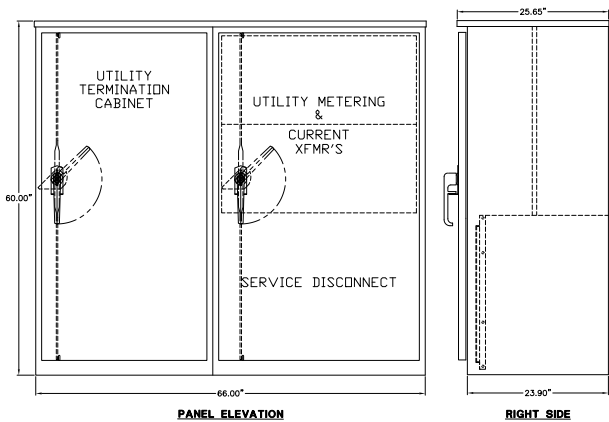

Structural Options

- » Right hand or left hand hinge
- » Custom colors available
- » Additional options for vandalism protection available

Specifications

- » Main breakers shall be 2 or 3 pole
- » May be rated up to 480 volt
- » Single or three phase
- » May be rated at 400 amp, 600 amp or 800 amp
- » Continuous welded seams
- » Fully framed side hinged outer door for flush fit with top drip lip and closed cell neoprene flange compressed gaskets
- » Separate pull section
- » Service enclosure interior is fabricated from cold rolled steel & powder coated white
- » Deadfront with stainless steel hinge and ¼ turn latch and knurled knobs
- » Completely prewired in the factory
- » Wiring will be to NEMA IIB standards showing external connections & external equipment

Custom options are available. Contact Tesco Controls, Inc. for more information:

916-395-8800 | sales@tescocontrols.com | www.tescocontrols.com | 8440 Florin Road, Sacramento, CA 95828

24-400 LOW PROFILE UTILITY METERING ENCLOSURE

OPTIONS

Enclosure Catalog Number	Enclosure Size W x H x D inch	*Millimeter
24-400	66 x 60 x 24	1676 x 1524 x 610
24-600		
24-800		

*Millimeter dimensions are approximate and for reference only; do not convert metric dimensions to inch.