



- » Built to UL 508A standards
- » Factory wired and tested before shipment
- » May be rated at 120 to 480 volts
- » Small, low-profile and attractive with no exposed fasteners
- » Self-contained
- » Vandal-resistant doors with hasp, stress rated to 2,000 lbs

Wall/pole mount control enclosures are used for a wide variety of municipal applications. The 66-000 wall-mount enclosure provides power distribution rated for 120 to 480 volts; single phase or three phase applications; and 1, 2 or 3 pole main breakers.

These enclosures are constructed of the highest grade of materials using hot dipped galvanized steel, stainless steel, or aluminum. Our coatings will withstand the most stringent testing applied to outdoor enclosures and meet or exceed state specifications. The wide range of options we can provide will allow for maximum utilization of your space.

Call us and see for yourself how Tesco Controls can make a difference on your next project.

Applications

- » Airport Beacon Systems
- » Athletic Field/Stadium Lighting
- » CATV Termination
- » Cellular
- » Flashing Beacon Controls
- » Landscape Irrigation
- » Parking Lot Lighting
- » Residential Application
- » Sign Lighting & Controls
- » Street Lighting
- » Storm Water Lift Stations
- » Tennis Court Lighting & Control
- » Traffic Signals
- » Waste Water Lift Stations
- » Water Pumping Plants
- » Used for Caltrans standard Sign Controls (SC & LC types)

Features


- » No exposed fasteners
- » Hot-dipped galvanized, aluminum or stainless steel
- » Durable all-welded construction
- » UL approved copper cable bussing and control wiring
- » Circuit breakers cable-in cable-out type
- » Factory wired and tested before shipment
- » Built to UL 508A Standards
- » Vandal-resistant doors with hasp, stress rated to 2,000 lbs (optional)

Component Options


- » Breakers
- » Contactors
- » Switches
- » Relays
- » Photo cells
- » Time clocks
- » Time delays
- » Transformers
- » Motor controls
- » Fans
- » Heaters
- » Thermostats
- » Terminal blocks
- » Flasher controls
- » Receptacles
- » Generator Receptacles
- » Transfer Switches




66-081206

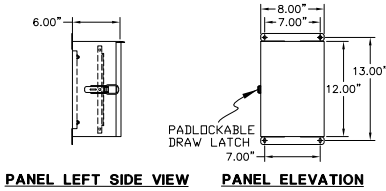

66-222809

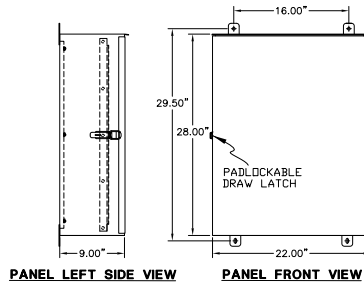


66-222812

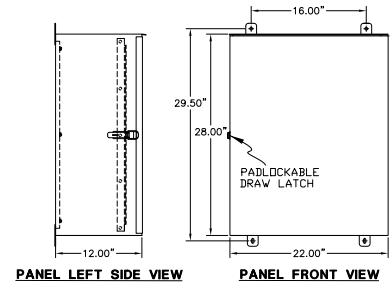


Structural Options

- » Multiple standard sizes
- » Custom sizes can be accommodated
- » Custom colors available
- » Additional sections may be added to house more components
- » Additional options for vandalism protection available

66-303609

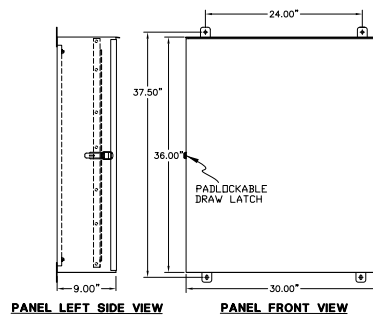

66-303612

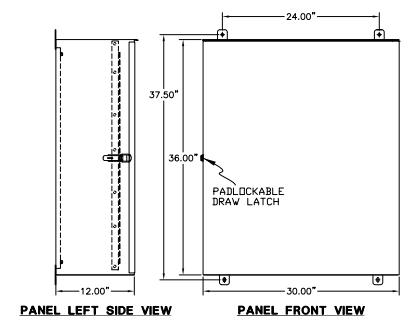

Specifications

- » Main breakers shall be 1, 2 or 3 pole
- » May be rated 120 volt up to 480 volt
- » Single or three phase
- » Continuous welded seams
- » Fully framed side hinged outer door with swaged close tolerance sides for flush fit with top drip lip & closed cell neoprene flange compressed gaskets
- » Service enclosure interior is fabricated from cold rolled steel & powder coated white
- » Full length deadfront with stainless steel hinge and ¼ turn latch & knurled knobs
- » Deadfront hinged on same side as the front door and opens up to 120 degrees
- » Completely prewired in the factory
- » Wiring will be to NEMA IIB standards showing external connections & external equipment

Custom options are available. Contact Tesco Controls, Inc. for more information:

916-395-8800 | sales@tescocontrols.com | www.tescocontrols.com | 8440 Florin Road, Sacramento, CA 95828

66-000 WALL-MOUNT ENCLOSURE

OPTIONS

Enclosure Catalog Number	Enclosure Size W x H x D inch	*Millimeter
66-081206	08 x 12 x 06	203 x 305 x 153
66-222809	22 x 28 x 09	559 x 711 x 229
66-222812	22 x 28 x 12	559 x 711 x 305
66-303609	30 x 36 x 09	762 x 915 x 229
66-303612	30 x 36 x 12	762 x 915 x 305
Custom (Consult Factory)		

*Millimeter dimensions are approximate and for reference only; do not convert metric dimensions to inch.