
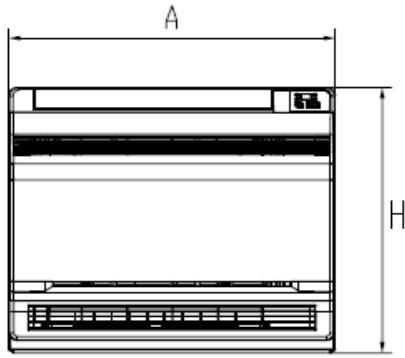


Submittal Data: TM18HEDI		18,000 BTU	
Job Name	Location	Date	
Purchaser	Engineer		
Submitted To	For	<input type="checkbox"/> Reference	<input type="checkbox"/> Approval <input type="checkbox"/> Construction
Unit Designation	Schedule No.		
GENERAL FEATURES -Quiet Operation -Multi-Speed Fan -Swing Louvers -Wireless Remote Controllers -Remote Control Lockout -Limited 5 yr. Parts Warranty			
System Ratings		Physical Specifications	
Cooling* Rated Capacity 18,089 BTU/H Heating* Rated Capacity 19,795 BTU/H Sound Pressure (Hi/Lo)** Cooling 48/32 dbA Heating 48/32 dbA Air Flow (max) Indoor Fan 383 CFM	Unit Dimensions (LxHxD) 27.5 x 24.0 x 8.5 -in 700 x 600 x 215-mm Weight (Net/Shipping) 33/40 LBS Drain Size (OD) 0.67-in 17-mm		
Electrical Ratings		Refrigerant Piping Data	
Fan Motor Output Power 30 W FLA 0.36 A Power Supply Normal Operational Voltage 208/230 V, 1 Phase, 60 Hz Voltage Range 187 - 253 V MCA 1.0 A Interconnecting Cable Wire Size 14-4 AWG	Refrigerant Type R410A Gas Pipe Size (OD) 1/2-in Liquid Pipe Size (OD) 1/4-in Connection Method Flared		
		* Test conditions are based on AHRI 210/240. **Sound Power ratings are per AHRI 270 and AHRI 350	



18,000 BTUH MODEL


Model # 18,000 BTUH 230V



Front



Side

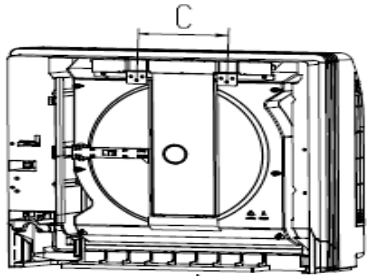


Back

Dimensions

	A	B	C	H
(mm)	700	215	200	600
(inches)	27.6	8.5	7.875	23.6

Note: Size refrigerant lines based on evaporator port

MINIMUM CLEARANCES

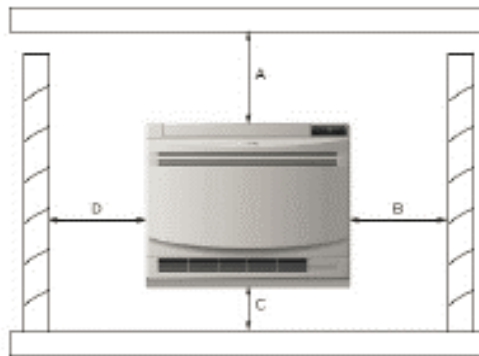

MINIMUM INDOOR CLEARANCE inches (mm)

A	B	C	D
60 (1524)	24 (610)	6 (152)	24 (610)

Notes:

1. Recommended Interconnecting Cable Type Stranded Bare Copper Conductors THHN 600V Unshielded Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.

Specifications are subject to change without notice. Manufacturer reserves the right to discontinue or modify specifications or designs without notice or without incurring obligations. All rights reserved.