TECHNICAL DATA SHEET

Novatik®

NATURE | ROMAN



With its warm colours, smooth slopes and broad curves, Novatik NATURE ROMAN perfectly captures the ageless appeal of sunbaked Mediterranean roofs, but unlike traditional terracotta tiles our Novatik NATURE ROMAN panels are lightweight and immensely strong. Novatik NATURE ROMAN panels are produced using premium quality steel, protected with ZnMg 0,82 oz/sq ft (250 g/sqm) alloy plus additional multiface® anti-corrosion protection on both sides and covered with natural volcanic stone chips. The multiface® protective layer represents a high-performance treatment applied to steel, with a thickness of 1 to 2 microns, and is an almost invisible (thin organic coating) sealant applied to hot-dip galvanized steel strips (ZnMg). Its remarkable properties give the steel a durable premium sealing, with excellent corrosion resistance and superior adhesion of subsequent finishing layers

30
YEARS
AESTHETICS WARRANTY

60
YEARS
TECHNICAL WARRANTY



COLOURS:


DARK MOON


BROWN EARTH


TERRA ROSA


SAND


GRAPHITE GREY

TECHNICAL INFORMATION

TOTAL LENGTH	52” (1320 mm)
LENGTH OF COVER	50” (1270 mm)
WIDTH OF COVER	14-9/16” (370 mm)
PANELS / SQ	20,6 (2.15 panels/sqm)
MINIMUM ROOF PITCH	3/12 (14˚)
WEIGHT / SQ	148,15 lbs (7 kg/sqm)
BATTEN SPACING	14-9/16” (370 mm)
STEEL TYPE / STEEL THICKNESS	DX51 / Gauge 26; (0,45 mm)
CORROSION RESISTANCE	Protective Layer ZnMg 0.82 oz/sq ft. (250 g/sqm) + multiface® anti-corrosion protection
TEXTURED FINISHED	Acrylic resin + Volcanic rock (Basalt) + Protective layer
TOTAL MAXIMUM THICKNESS	1/16” (2.1 mm)

Manufactured by: NOVATIK SRL
DISTRIBUTED by: NOVATIK Distribution, LLC Tel: +1 786 512-9248, +1 239 470-7130 office@novatik.us, novatik.us
Novatik NATURE ROMAN Technical Data Sheet | January 2023

TECHNICAL DATA SHEET

Novatik®

NATURE | SLATE



All the appearance of natural slates, combined with the strength of steel and the weather resistance of a rock chip coating, this minimalist design is an ideal choice for those seeking a more modern look.
With its flat profile and neutral colour, NATURE SLATE is suitable for both vertical and pitched roofs, perfectly meeting the needs of contemporary architectural design.

Novatik NATURE SLATE panels are produced using premium quality steel, protected with ZnMg 0,82 oz/sq ft (250 g/sqm) alloy plus additional multiface® anti-corrosion protection on both sides, and covered with natural volcanic stone chips. The multiface® protective layer represents a high-performance treatment applied to steel, with a thickness of 1 to 2 microns, and is an almost invisible (thin organic coating) sealant applied to hot-dip galvanized steel strips (ZnMg). Its remarkable properties give the steel a durable premium sealing, with excellent corrosion resistance and superior adhesion of subsequent finishing layers.

30
YEARS
AESTHETICS WARRANTY

60
YEARS
TECHNICAL WARRANTY



COLOURS:


DARK MOON


SILVER MOON


BROWN EARTH


GRAPHITE GREY

TECHNICAL INFORMATION

TOTAL LENGTH	50-3/8” (1280 mm)
LENGTH OF COVER	48-1/4” (1225 mm)
WIDTH OF COVER	14-9/16” (370 mm)
PANELS / SQ	20,8 (2.17 panels/sqm)
MINIMUM ROOF PITCH	3/12 (14˚)
WEIGHT / SQ	148,15 lbs (6.7 kg/sqm)
BATTEN SPACING	14-9/16” (370 mm)
STEEL TYPE / STEEL THICKNESS	DX51 / Gauge 26; (0,45 mm)
CORROSION RESISTANCE	Protective Layer ZnMg 0.82 oz/sq ft. (250 g/sqm) + multiface® anti-corrosion protection
TEXTURED FINISHED	Acrylic resin + Volcanic rock (Basalt) + Protective layer
TOTAL MAXIMUM THICKNESS	1/16” (2.1 mm)

Manufactured by: NOVATIK SRL
DISTRIBUTED by: NOVATIK Distribution, LLC Tel: +1 786 512-9248, +1 239 470-7130 office@novatik.us, novatik.us
Novatik NATURE SLATE Technical Data Sheet | January 2023

TECHNICAL DATA SHEET

Novatik®

NATURE | CLASSIC



With its curved lines and symmetric profile, Novatik NATURE CLASSIC is versatile and timeless. It is the perfect choice for those seeking an elegant roof style that will always be in fashion.

Novatik NATURE CLASSIC panels are produced using premium quality steel, protected with ZnMg 0,82 oz/sq ft (250 g/sqm) alloy plus additional multiface® anti-corrosion protection on both sides, and covered with natural volcanic stone chips. The multiface® protective layer represents a high-performance treatment applied to steel, with a thickness of 1 to 2 microns, and is an almost invisible (thin organic coating) sealant applied to hot-dip galvanized steel strips (ZnMg). Its remarkable properties give the steel a durable premium sealing, with excellent corrosion resistance and superior adhesion of subsequent finishing layers.

30
YEARS
AESTHETICS WARRANTY

60
YEARS
TECHNICAL WARRANTY



COLOURS:



TECHNICAL INFORMATION

TOTAL LENGTH	52-3/4” (1340 mm)
LENGTH OF COVER	49-5/8” (1260 mm)
WIDTH OF COVER	14-9/16” (370 mm)
PANELS / SQ	20,6 (2.15 panels/sqm)
MINIMUM ROOF PITCH	3/12 (14˚)
WEIGHT / SQ	143.3 lbs (6,5 kg/sqm)
BATTEN SPACING	14-9/16” (370 mm)
STEEL TYPE / STEEL THICKNESS	DX51 / Gauge 26; (0,45 mm)
CORROSION RESISTANCE	Protective Layer ZnMg 0,82 oz/sq ft (250 g/sqm) + multiface® anti-corrosion protection
TEXTURED FINISHED	Acrylic resin + Volcanic rock (Basalt) + Protective layer
TOTAL MAXIMUM THICKNESS	1/16” (2.1 mm)

Manufactured by: NOVATIK SRL
DISTRIBUTED by: NOVATIK Distribution, LLC Tel: +1 786 512-9248, +1 239 470-7130 office@novatik.us, novatik.us
Novatik NATURE CLASSIC Technical Data Sheet | January 2023

TECHNICAL DATA SHEET

Novatik®

NATURE | WOOD



Novatik NATURE WOOD captures the natural beauty of a wood shingle roof. Long lasting, easy and quick to install and low maintenance, the modern materials used in its manufacture overcome the disadvantages of a traditional wood roof. **Novatik NATURE WOOD** is the ideal choice for those who are seeking a roof with a more rustic appeal.

Novatik NATURE WOOD panels are produced using premium quality steel, protected with ZnMg 0,82 oz/sq ft (250 g/sqm) alloy plus additional multiface® anticorrosion-protection on both sides, and covered with natural volcanic stone chips. The multiface® protective layer represents a high performance treatment applied to steel, with a thickness of 1 to 2 microns, and is an almost invisible (thin organic coating) sealant applied to hot-dip galvanized steel strips (ZnMg). Its remarkable properties give the steel a durable premium sealing, with excellent corrosion resistance and superior adhesion of subsequent finishing layers.

30
YEARS
AESTHETICS WARRANTY

60
YEARS
TECHNICAL WARRANTY

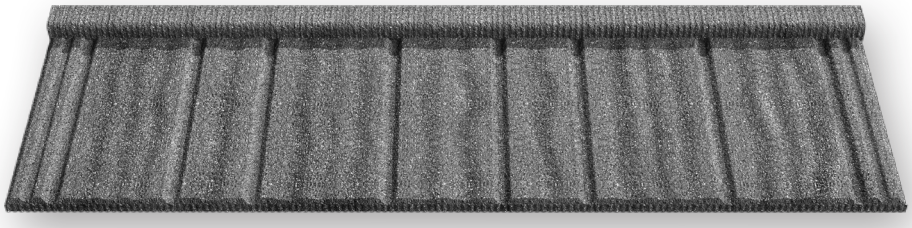

COLOURS:



TECHNICAL INFORMATION

TOTAL LENGTH	54-1/8” (1375 mm)
LENGTH OF COVER	51-3/4” (1315 mm)
WIDTH OF COVER	14-9/16” (370 mm)
PANELS / SQ	20 (2.09 panels/sqm)
MINIMUM ROOF PITCH	3/12 (14˚)
WEIGHT / SQ	151.52 lbs (7,16 kg/sqm)
BATTEN SPACING	14-9/16” (370 mm)
STEEL TYPE / STEEL THICKNESS	DX51 / Gauge 26; (0,45 mm)
CORROSION RESISTANCE	Protective Layer ZnMg 0.82 oz/sq ft. (250 g/sqm) + multiface® anti-corrosion protection
TEXTURED FINISHED	Acrylic resin + Volcanic rock (Basalt) + Protective layer
TOTAL MAXIMUM THICKNESS	1/16” (2.1 mm)

Manufactured by: NOVATIK SRL
DISTRIBUTED by: NOVATIK Distribution, LLC Tel: +1 786 512-9248, +1 239 470-7130 office@novatik.us, novatik.us
Novatik NATURE WOOD Technical Data Sheet | January 2023