TECHNICAL DATA SHEET

Novatik | METAL

CLASSIC DUO

The bimodular design and symmetry of Novatik METAL CLASSIC DUO makes it one of the most effective types of metal roofing, which ensures easy and quick installation, minimizing technological losses. Based on elegance and refinement, classic remains a universal and timeless style, adaptable to any project. Although Novatik METAL CLASSIC DUO keeps all the style characteristics, it also enjoys the modern roofing technology, offering to users, besides a perfectly harmonized appearance, safety through durability.

>LAYERS

finishing MAT/HIGH COAT/FROST

1. **MAT**: Polyester Mat 35 µm;
HIGH COAT: Polyurethan - Polyamid 50 µm;
FROST: Polyurethan 60 µm;
(on the front side of the tile);
2. Primer;
3. Protective layer of: ZnMg / Zn
4. Steel;
5. Protective layer of : ZnMg / Zn;
6. **MAT**: Polyester 10 µm / 7 µm;
HIGH COAT: Epoxid 10 µm;
FROST: Epoxid 12 µm;
(on the back side of the tile).



	Novatik | METAL CLASSIC DUO MAT	Novatik | METAL CLASSIC DUO HIGH COAT	Novatik | METAL CLASSIC DUO FROST
TOTAL LENGTH	52-3/4" (1 340 mm)	52-3/4" (1 340 mm)	52-3/4" (1 340 mm)
LENGTH OF COVER	49-5/8" (1 260 mm)	49-5/8" (1 260 mm)	49-5/8" (1 260 mm)
WIDTH OF COVER	29-1/8" (740 mm)	29-1/8" (740 mm)	29-1/8" (740 mm)
PANELS/SQ	10,3 (1,07 panels/sqm)	10,3 (1,07 panels/sqm)	10,3 (1,07 panels/sqm)
MINIMUM ROOF PITCH	3/12 (14°)	3/12 (14°)	3/12 (14°)
THICKNESS (STEEL + ORGANIC COATINGS)	Gauge 25 (0.5 mm)/ Gauge 24 (0.6 mm)	Gauge 25 (0.5 mm)	Gauge 25 (0.5 mm)
WEIGHT / SQ	100.31 lb (4,74 kg/sqm)	105 lb (4,96 kg/sqm)	105 lb (4,96 kg/sqm)
LOOK	MAT	GLOSSY	CRYSTALLIZED
SURFACE COATING	Polyester Mat **35 microns**, on the front side of the tile	Polyurethan/Polyamid **50 microns**, on the front side of the tile	Polyurethan **60 microns** on the front side of the tile
PROTECTION LAYER	Lack polyester **10 microns / 7 microns**, on the back side of the tile	Lack Epoxid **10 microns**, on the back side of the tile	Lack Epoxid **12 microns**, on the back side of the tile
RAW MATERIAL	Steel with protective coating of **ZnMg 0,39 oz/sq ft (120g/sqm) /Zn 0,90 oz/sq ft (275 g/sqm)**	Steel with protective coating of **ZnMg 0,39 oz/sq ft (120g/sqm) /Zn 0,90 oz/sq ft (275 g/sqm)**	Steel with protective coating of **Zn 0,90 oz/sq ft (275 g/sqm)**
UV RESISTANCE	RUV 4	RUV 4	RUV 4
CORROSION RESISTANCE	RC 3	RC 4	RC 4

Novatik METAL | CLASSIC DUO MAT

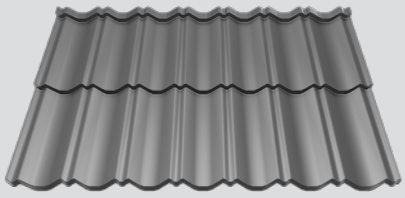

0.5 mm		0.6 mm	
20 YEARS AESTHETIC WARRANTY	30 YEARS TECHNICAL WARRANTY	20 YEARS AESTHETIC WARRANTY	40 YEARS TECHNICAL WARRANTY

COLOURS
Gauge 25 (0,5 mm)



COLOURS
Gauge 24 (0,6 mm)



Novatik METAL | CLASSIC DUO HIGH COAT



20 YEARS AESTHETIC WARRANTY	40 YEARS TECHNICAL WARRANTY

COLOURS



Novatik METAL | CLASSIC DUO FROST



20 YEARS AESTHETIC WARRANTY	40 YEARS TECHNICAL WARRANTY

COLOURS



Manufactured by: NOVATIK SRL
HEAD QUARTERS: 9 Mai street, no. 75, Băicoi, Prahova, Tel: +40 244 260 140; Fax: +40 244 260 145; office@novatik.ro, novatik.ro
Novatik METAL CLASSIC DUO Technical Data Sheet – ENG_V2 | January 2023