

MCX Tech

mcx-tech.com

1300 770 970

BROADACRE TRAILED SPRAY RANGE



CROPLANDS IS COMMITTED TO A SUSTAINABLE FUTURE



BROADACRE TRAILED SPRAY RANGE

04-05 CROPLANDS SPRAYERS

06-07 PEGASUS 8000 & 7000

08-09 PEGASUS 8000 FEATURES

10-11 PEGASUS 7000 FEATURES

12-13 PEGASUS 6000 & 5000

14-15 PEGASUS 6000 & 5000 FEATURES

16-17 PINTO 4000 & 3000

18-19 PINTO 4000 & 3000 FEATURES

20-23 SONIC BROADACRE

24 LINKAGE SPECIAL

25 MAGROWTEC

26-27 SELECTION GUIDE

28 DEALER LISTING



THIS GUIDE IS PRINTED ON CARBON NEUTRAL PAPER.
FINSBURY GREEN PRINTED CARBON NEUTRAL.

CROPLANDS SPRAYERS



Engineered with the latest technology, our sprayers are as highly durable as they are easy to operate. They set the standard for reliability and efficiency, providing growers with confidence in their performance season after season.

Top-quality tanks

- Versatile tank sizes to match the scale of any operation, ranging from 3000 to 13000 litres.
- Hard wearing and long lasting with UV and chemical-resistant technology.
- Chemical suspension optimised with Venturi agitation. Recirculation on Pegasus models provides next-level agitation.
- Boom prime/recirculation/flushing system is standard on Pegasus 8000 and 7000 models. Optional on 6000 and 5000 models.
- All models are equipped with flushing tanks that provide first-class boom hygiene and rinsing functions for a comprehensive tank clean out.
- Fresh-water handwashing tanks provide convenient safety to operators.
- Integrated chemical induction hoppers ensure effortless chemical mixing and main-tank transfer.

LANDS RS



PEGASUS 6000 WITH 36M BOOM

Robust booms

- Sizes range from 16.5 to 48.5 metres, depending on the model.
- Paddock-proven to handle Australia's tough conditions.
- Highly durable with chemical and corrosion resistance.
- Hydraulic fold and lift with fold-in gull-wing style.
- Optional independent hydraulic wing lift and independent outer wing fold for spraying at half width.
- Internally mounted spray rails for nozzle protection and durability.
- Non-drip, quick-release nozzle bodies with drift-reducing AirMix® air-induction nozzles.
- Nozzles spaced 50cm on a single line.
- Optional triple nozzle bodies on 50cm spacing.
- Optional single nozzles at 25cm spacing to improve penetration on small targets and chemical distribution.

Heavy-duty chassis

- Heavy-duty and reliable, the chassis is designed to meet Australia's harsh conditions.
- The axle suspension on larger models provides excellent shock absorption to maintain a smooth ride on undulating terrain.
- Heavy duty, air bag suspension drawbar on the Pegasus 8000 and 7000 models.

Technical support and service

You can expect the very best local support from the Croplands dealer network. The experienced technicians in our service centres know your sprayer inside and out. And, with dealers and warehouses located all around the country, high-quality parts and accessories are always close to hand.

PEGASUS 8000 & 7000



Tank

The low-profile tank is specially engineered to sit deeper into the chassis, supporting boom stability. The deep sump is completely emptied through a 50mm drain outlet, while large Venturi agitators, ensure exceptional agitation and chemical suspension. No particles can enter the tank thanks to a strainer-fitted, hinged lid and a screen-filtered, top-bottom fill point.

Experience additional versatility with the Pegasus 7000 and its integrated 1500-litre freshwater flush/storage tank, which transfers water from the storage tank to finish off small areas.

S

Boom Prime/Recirculation/Flush

Boom prime/recirculation/flush system is standard on Pegasus 8000 and 7000 models. Designed to aid agitation and ensure the boom is fully charged with fresh chemical from the very first headland spray.

The Pegasus range is renowned for its exceptional productivity and effortless operation. This hallmark performance is delivered to large-scale farming through the 8000 and 7000 models.

Both models are ISOBUS compatible, and compatible with Trimble, Topcon and Greenstar.

Pegasus 8000 and 7000 application package upgrades available

- Stainless steel 1" boom plumbing system with four major boom feeds to improve chemical distribution across the entire boom. Boom tubes flow through either 90 or 180° to enhance flow for rapid auto-section response times.
- Air stop valves, fitted directly to the nozzle body, allow rapid auto-boom shut-off speeds – even with high boom pressures. Up to 16-section valves available – limited by customer's controller. Air stops on triple nozzles at 500mm spacing or single nozzles at 250mm.
- Nozzle spacings of 250mm provide improved penetration in stubbles and better chemical distribution in uneven paddocks.
- A recirculation valve enables boom priming while also helping to speed up the boom decontamination process.

Boom

The booms, ranging between 33 and 36 metres, deliver unparalleled stability through a pendulum-type, fully floating, self-levelling centre section with yaw dampening and parallelogram lift, along with hydraulic accumulator suspension for exceptional boom ride and stability. Navigating through tight spaces is also streamlined by half folding the boom via optional independent outer wing fold.

Spacious operator access area

A large platform provides safe and easy access to the filling lid. Fold-down steps maintain crop clearance.

250L/min pump

A rugged, six-diaphragm pump operates at up to 10 bar with minimal system stress. Positive displacement liquid delivery means perfect pressure, so air-induction nozzles work to their potential. Optional hydraulically driven centrifugal pump.

Jack stand/height adjustable hitch

A heavy-duty, hydraulic retractable jack stand provides effortless parking and excellent clearance during operation. The height-adjustable hitch optimises the distribution of weight on the drawbar.

Air-ride drawbar system

Effects on the tractor's drawbar are minimised through a heavy-duty drawbar with an integrated Hendrickson airbag.

Wheels

710/70R x 42" single wheels minimise compaction and further enhance ride quality.

Chem-e-flush

A 100L chemical mixing unit drops down to a safe working height. Optional enviro-transfer system with drum fittings is also available.

Boom suspension

The parallelogram boom suspension with hydraulic accumulator ensures rides are smooth and significantly reduces boom fatigue.

700L flushing tank

A unique, fully integrated boom flushing system uses up to 700L of fresh water from a separate tank. The system allows the operator to flush lines with no return to the main tank. This enables instant boom-line purging in the field.



Ready to spray

The new boom prime/recirculation/flush system enables full efficacy from the first spray.

Liquid control

Fitted with the ARAG Bravo 180S automatic spray rate controller. Five-section liquid control is standard, with up to nine sections available.

Airbag axle suspension

Hendrickson airbags ensure a smoother ride and boom longevity. It's also fitted with a ride-height valve to ensure constant chassis height.

Central control panel

The operator can control all the filling, mixing and flushing functions from a convenient, central point. This is a hallmark of the Pegasus range.





Central control panel

Filling, flushing, chemical mixing and induction are all controlled at a central point, saving time and effort. All tanks can be filled from a single source, with a rotary valve enabling tank selection.

Ready to spray

The new boom prime/recirculation/flush system enables full efficacy from the first spray..

1500L tank

Boasting industry-leading capacity, it thoroughly flushes the boom system and main tank. It can also be used to hold extra water for spraying.

Safe access platform

The up-and-over platform allows safe and easy access to the tank lids from both sides of the sprayer. Fold-down steps maintain crop clearance.

Air-ride drawbar system

The heavy-duty drawbar, featuring an integrated Hendrickson airbag and automatic ride-height valve, minimises feedback to the tractor. It also features a resilient, heavy-duty adjustable hitch, swivelling eye drawbar and adjustable drop-down leg.

Large pump capacity

The latest high-flow centrifugal pump provides excellent tank agitation and fast boom response. The boom prime and recirculation system improves efficiency in boom cleaning and decontamination, and eliminates the need to prime booms on the fence-line.

Fully integrated chemical induction hopper

The standard 60L Chem-e-flush hopper, fully integrated to the sprayer's control system, enables a range of options, including a chemical suction probe that inducts chemicals from smaller drums. An optional 12V chemical transfer pump system is also available, complete with micromatic drum fittings.

Liquid control

Fitted with the ARAG Bravo 180S automatic spray rate controller. Five-section liquid control is standard, with up to nine sections available.

Boom suspension

The parallelogram boom suspension with hydraulic accumulator ensures rides are smooth and significantly reduces boom fatigue.

Airbag axle suspension

Hendrickson airbags ensure a smoother ride and boom longevity, and is controlled by an automatic ride-height valve.

PEGASUS 6000

PEGASUS 5000 WITH 30M BOOM

**Built with a highly resilient chassis,
large diameter single wheels
and heavy-duty booms, these Pegasus
models promise unrivalled spraying
control over almost any terrain.**

Both models are ISOBUS compatible, and compatible
with Trimble, Topcon and Greenstar.

\$ & 5000



Tank

Both 6000 and 5000-litre tanks are low profile and easy to clean, featuring a tank-rinsing facility, large drain outlet and deep, fully draining sump. Chemical suspension is optimised through dual-Venturi agitation, and screen filters at the fill point keeps particles from entering the tank.

Ready to spray

Boom prime/recirculate/flush system is now available as an option on Pegasus 6000 and 5000 models.

Boom

Ranging from 24 to 36 metres, boom options provide a smooth ride across any terrain. Shock from sudden wheel track movements is absorbed thanks to the parallelogram boom lift, hydraulic accumulator suspension and pendulum-type, fully floating self-leveller.

Potential contact damage is minimised through the combination of adjustable boom-end breakaways, boom skids fence-line protectors and protected nozzles.

Pegasus application packages and 250mm upgrade – see page 07 for details.



Bravo 180S fully automatic controller options

Both models feature a Bravo 180S five-section, fully automatic spray rate controller, with the option to upgrade to seven or nine sections liquid control.

Ready to spray

Boom prime/recirculation/flush system now available as an option for Pegasus 6000 and 5000 models.

Airbag axle suspension

This is a standard feature on all Pegasus 6000 units. It's equipped in 5000 models that have a 33 or 36m boom, and is optional for 5000 models fitted with a 24 or 30m boom. This suspension option is recommended for more undulating terrain.

Up to nine boom sections

Reliable ARAG-motorised valves matched to your selected auto-rate spray controller.

Nozzles and nozzle bodies

Includes single non-drop nozzle bodies, complete with AirMix[®] air-induction nozzles, along with stainless steel boom lines with filters for each section and boom flush taps. Left and right fenceline nozzles standard. Triplex nozzle bodies are optional.

Flushing and handwash tanks

A 470L flushing tank enables rinsing in the field, while a 20L freshwater handwash tank provides safety and peace of mind.

Adjustable hitch design

The adjustable hitch allows operators to match tractor and sprayer drawbar height.

Fully integrated chemical induction hopper

The standard 60L Chem-e-flush hopper, fully integrated to the sprayer's control system. Optional AgRunner system complete with micromatic drum fittings.

Spacious operator access area

A large platform provides safe and easy access to the filling lid and liquid control system.

Central control panel

Filling, flushing, chemical mixing and induction are all controlled at a central point. All tanks can be filled from a single source, with a rotary valve enabling tank selection.

Big pump capacity

The large-capacity AR185 LFP (180L/min open-flow) diaphragm pump provides positive displacement liquid delivery with minimal service or downtime. The maximum operational system pressure is 10 bar – perfect for low-to-high pressure air-induction nozzles. An optional 250L/min pump is available, as are a choice of hydraulic drive pumps instead of the standard PTO drive.

Boasting simplicity, functionality and high durability, the Pinto 4000 and 3000 models deliver exceptional results year after year.

Both models are ISOBUS compatible, and compatible with Trimble, Topcon and Greenstar.

Tank and chassis

The high-quality 4000 and 3000-litre polyethylene tanks are supported by a highly durable chassis. A generous 160-litre/min diaphragm pump provides superior agitation and water rate flexibility, while the hydraulic accumulator boom suspension ensures a smooth, cushioned ride.

Boom

Ranging between 16.5 and 24.5 metres, the fully hydraulic booms include hydraulic parallelogram boom lift, fully adjustable boom breakaways, three-section boom control and a self-levelling device, which improves application precision.

PINTO 4000



L: PINTO 4000 WITH 24M BOOM
R: PINTO 3000 WITH 21M BOOM

CROPLANDS

0 0 & 3000







275L flushing tank

The flushing tank enables excellent boom hygiene, allowing the operator to rinse in the field as soon as the job is done.

Wheels fitted to suspension axle

18.4 x 30" single wheels are fitted to a heavy-duty axle. Rubber-mount suspension for a smoother ride and improved boom stability is fitted standard on Pinto 4000 (available as an option for Pinto 3000).

Central control panel

All controls and filters for flushing, chemical induction and handwashing are mounted on a central control panel. Everything is clearly marked for simple, quick and convenient operation.

Parallelogram boom lift

The hydraulic boom lift provides smooth height control, so the correct spraying height is always at the operator's fingertips.

60L chemical induction hopper

The standard 60L Chem-e-flush hopper, fully integrated to the sprayer's control system. Optional AgRunner system complete with micromatic drum fittings.

AirMix® air-induction nozzles

ALBUZ low pressure, air induction nozzles fitted standard along with left and right fence line nozzles standard along with boom section filters.



SONIC 13000 10000 & 7000

**Big capacity broadacre
trailing sprayers.
Designed for efficiency.
Engineered to endure.**

Sonic Boomsprays trailed broadacre sprayers are designed and manufactured in Narembeen, Western Australia with a focus on large scale spraying operations.



SONIC 13000

SONIC 10000

SONIC 7000

Tanks			
Tank sizes	13,000L	10,000L	7,000L
Tank volume indicator	Visio and clear hose Indicator	Visio and clear hose Indicator	Visio and clear hose Indicator
Agitation	2 x 2 Hydraulic Agitators	2 x 2	1 x 2
Drainage	Manual 2"	Manual 2"	Manual 2"
Flushing tank	500L Poly	500L Poly	500L Poly
Tank rinse system	3 sprinkler in tank system	3 sprinkler in tank system	2 sprinkler
Filling (standard)	2" Quick Fill into Sump, 2" Hypro Suction	2" Quick Fill into Sump, 2" Hypro Suction	2" Quick Fill into Sump, 2" Hypro Suction
Filling flowmeter (optional)	Visio Tank Level Indicator	Visio Tank Level Indicator	Visio Tank Level Indicator
Hand wash tank	35L	35L	35L
Chassis			
Hitch	Heavy Duty, Swivel eye	Heavy Duty, Swivel eye	Heavy Duty, Swivel eye
Jack stand	Manual	Manual	Manual
Axle	3m Fixed	2.4m Std (3.0m Option)	2.4m Std (3.0m Option)
Axle steer	Tandem Rear Steer	Tandem Rear Steer	Tandem Rear Steer
Axle suspension	Airbag on parabolic springs	Walking Beam	Walking Beam
Mudguards	Yes	Yes	Yes
Mudflaps	Yes	Yes	Yes
Tyres	620/85R42	540/65R34	18.4 x 28
Axle rating	25,000 kg	18,000 kg	13,000 kg
Pump			
Pump	Hypro 9305C-SP	Hypro 9305C-SP	Hypro 9305C-SP
Pump drive	Hydraulic or Honda Motor	Hydraulic or Honda Motor	Hydraulic or Honda Motor
Filtration	Suction and Pressure	Suction and Pressure	Suction and Pressure
Controls			
Boom shutoff valves	ARAG 5 section (7 & 9 optional)	ARAG 5 section (7 & 9 optional)	ARAG 5 section (7 & 9 optional)
Controller	ARAG IBX100 ISOBUS (VT required)	ARAG IBX100 ISOBUS (VT required)	ARAG IBX100 ISOBUS (VT required)
System operation/workstation	Compact rotary selector-valve system	Compact rotary selector-valve system	Compact rotary selector-valve system
Booms			
Boom range	45.5 and 48.5m	36.5m, 45.5m and 48.5m	36.5m, 45.5m and 48.5m
33-48m boom	Heavy Duty Cable suspended	Heavy Duty Cable suspended	Heavy Duty Cable suspended
Boom suspension	Nitrogen Accumulator type	Nitrogen Accumulator type	Nitrogen Accumulator type
Hydraulic controls	Direct Remote with electric switchbox	Direct Remote with electric switchbox	Direct Remote with electric switchbox
Hydraulic wing lift	Yes Std	Yes Std	Yes Std
Boom breakaways	Yes, self-returning on outer wing	Yes, self-returning on outer wing	Yes, self-returning on outer wing
Boom height adjustment	Yes, Parallelogram	Yes, Parallelogram	Yes, Parallelogram
Boom plumbing (on centre)	1/2" poly dry line, 50cm spacing	1/2" poly dry line, 50cm spacing	1/2" poly dry line, 50cm spacing
Boom flushing taps	Yes, on all boom sections	Yes, on all boom sections	Yes, on all boom sections
Prime/Recirculation/Flush	Optional	Optional	Optional
Nozzles & chemical transfer			
Nozzles	025 Airmix Standard	025 Airmix Standard	025 Airmix Standard
Nozzle control system	Teejet Airmatic (optional)	Teejet Airmatic (optional)	Teejet Airmatic (optional)
Fence-line sprayer assembly	Yes, left and right std	Yes, left and right std	Yes, left and right std
Fill system	2" std with Optional 3" quick fill direct to tank	2" std with Optional 3" quick fill direct to tank	2" std with Optional 3" quick fill direct to tank
Chemical mixing and induction	Std 40l hopper on drop down leg	Std 40l hopper on drop down leg	Std 40l hopper on drop down leg
Chemical induction probe with drum rinse	Std	Std	Std





SONIC 13000/48 MODEL SHOWN



Maintenance

- Grease banks for easy greasing
- All pivots machine bushed and easily accessible
- Large weatherproof tool box for storage
- Hydraulics and Electrics in large sealed cabinet
- All filters easily accessible to clean

Axles

- BPW tandem steerable axles
- Load sharing suspension
- Load rated parabolic springs
- 2.4 and 3 metre axle track options

Tanks

- Tank sizes available include 7000, 10,000 and 13,000 litres
- 500 litre fresh water flush tank
- 35 litre fresh water hand wash tank
- Tank sprinklers mounted in top of main tank for flushing
- High volume tank agitation

Booms

- Boom sizes include 36.5 m (120'), 45.5 m (150') and 48.5 m (160')
- Hydraulic fold cable suspended
- Individual hydraulic wing lift
- Accumulators on lift rams
- Outer wing tip breakaways
- Large "Oversize" sign on rear of boom

Plumbing

- Large 100mm pressure gauges easy to view
- Simplified plumbing for ease of operation
- Stainless steel boom flush taps
- Main tank sight gauge
- Optional triplex nozzle bodies
- Clearly labelled and easy to use operator panel

Controllers

Large selection of rate controller options. Arag IBX ISOBus. Trimble Field IQ. Raven RCM ISOBus. JD loom options. Arag Vision tank level sensor fitted.

SCAN FOR
VIDEOS ON
SONIC RANGE



LINKAGE

AGRIPAK SPECIAL 1300 & 1600



Available in both 1300 and 1600 Litre tank size.

Comes with heavy duty galvanised frame, AR160m pto driven diaphragm pump. 30 Litre chemical mixer, 1500mm hydraulic height adjuster, flush tank and handwash tank. Option of hydraulic driven pump.

Boom

Choose from 16, 18 or 21 metre hydraulic fold boom, or the option of full hydraulic individual wing lift.

Liquid Control

Standard fitment of in cab 3 section electric switch box. Options of auto rate controller, Trimble ready Field IQ, John Deere adaptor loom and ISObus.

Nozzles

Includes single non-drip nozzle bodies, complete with AirMix® air induction nozzles, along with stainless steel boom lines. Optional in line boom section filters and fence line nozzles.

Central Control Panel

Filling, flushing and chemical mixing are all carried out at a central point. Easy to use taps and valves for ease of operation.

MAGROWTEC



Magnetic spray assist technology for broadacre boom spray application.

The MagrowTec magnetic spray assist technology system can be retrofitted to existing boom sprayers or on to new builds.

MagrowTec Technology has the impact of affecting the physical properties of the fluid that determine the spray droplet dynamics and adhesion. We typically see:

- Droplet optimisation
- Efficiency improvements; and
- Improved coverage.

Key Features

- No moving parts, zero maintenance
- Only 1% magnetic deterioration per 15 years
- Brand and product agnostic
- Complimentary to other technologies
- Install or move to any sprayer
- Easy to install and use



PEGASUS 8000

PEGASUS 7000

PEGASUS 6000

Dimensions			
Dimensions	W 3.46 x L 9.7 x H 4.0 (36m)	W 3.46 x L 9.5 x H 4.0 (36m)	W 3.45 x L 9.2 x H 4.2 (36m)
Weight (dry approx.)	6,510kg (36m)	6,310kg (36m)	5,300kg (36m)
Tanks			
Tank sizes	8,000L	7,000L	6,000L
Tank volume indicator	Calibrated tube / Arag Visio option	Calibrated tube / Arag Visio option	Calibrated tube / Arag Visio option
Agitation	Dual Superflo	Dual Superflo agitation + bypass	Dual Superflo agitation + bypass
Drainage	2" drain valve	2" drain valve	2" drain valve
Flushing tank	700L	1,500L	470L
Tank rinse system	Dual rotating flushing nozzle	Dual rotating flushing nozzle	Rotating flushing nozzle
Filling (standard)	2" male Camlock with non-return valve and filter	2" male Camlock with non-return valve and filter	2" male Camlock with non-return valve and filter
Filling flowmeter (optional)	2" ARAG Wolf	N/A	2" ARAG Wolf
Hand wash tank	35L	20L	20L
Chassis			
Hitch	Height adjustable with air-ride suspension	Height adjustable with air-ride suspension	Height adjustable with swivel eye and safety chain
Jack stand	Heavy-duty hydraulic retractable for clearance	Heavy-duty hydraulic retractable for clearance	Heavy-duty hydraulic retractable for clearance
Axle (adj. 3m standard on 33-36m models)	3 m adjustable axle kit	3m fixed with air-ride suspension	2.2m (optional 3m kit) and 3m adjustable kit
Axle suspension	Load-sensing air bag type standard	Load-sensing air bag type standard	Load-sensing air bag type standard
Air system (if fitted)	12-volt electric system with reservoir	12-volt electric system with reservoir	Direct drive high capacity system with reservoir
Mudguards	Full width ½ wheel type (standard)	Full width ½ wheel type (standard)	Full width ½ wheel type (standard)
Mudflaps	Croplands branded flex type	Croplands branded flex type (standard)	Croplands branded flex type
Under axle clearance	690mm	725mm	720mm
Tyres	710/70R x 42"	710/70R x 42"	20.8 x 42"
Axle rating	15,500 kg @ 40 km/h	16,250kg @ 25 km/h	14,000 kg @ 25 km/h
Pump			
Pump (AR positive displacement diaphragm type)	AR250 (optional high flow centrifugal)	High-flow centrifugal pump	AR185 LFP (optional AR250 or high flow centrifugal)
Pump drive (PTO standard)	Hydraulic drive standard (550rpm max)	N/A	Hydraulic drive (optional) (550rpm max)
Filtration	5-point filtration	5-point filtration	5-point filtration
Controls			
Boom shutoff valves	ARAG motorised 5 section (optional 7-9 section)	ARAG motorised 5 section (optional 7-9 section)	ARAG motorised 5 section (optional 7 section)
Controller	Bravo 180S	Bravo 180S	Bravo 180S
System operation/workstation	Compact rotary selector-valve system	Colour-coded rotary selector-valve system	Compact rotary selector-valve system
Booms			
Boom range	33-36m	33-36m	30-36m
33-36m boom	Heavy-duty spring-loaded yaw control	Heavy-duty spring-loaded yaw control	Heavy-duty spring-loaded yaw control
Boom suspension	Nitrogen accumulator type	Nitrogen accumulator type	Nitrogen accumulator type
Hydraulic controls	Direct remote elec/hydraulic (in-cab)	Direct remote elec/hydraulic (in-cab)	Direct remote (elec/hydraulic for more than 2 functions) (in-cab)
Hydraulic wing lift	Optional	Optional	Optional
Boom breakaways	Self-returning on outer wing	Self-returning on outer wing	Self-returning on outer wing
Boom height adjustment	2,000mm parallelogram type	2,000mm parallelogram type	2,000mm parallelogram type
Boom plumbing (on centre)	Low-friction stainless steel boom tube	Low-friction stainless steel boom tube	Low-friction stainless steel boom tube
Boom flushing taps	Fitted to all boom tube sections	Fitted to all boom tube sections	Fitted to all boom tube sections
Prime/Recirculation/Flush	Standard	Standard	Optional
Nozzles & chemical transfer			
Nozzles	AirMix 110-02 standard	AirMix 110-02 standard	AirMix 110-02 standard
Twin nozzle switching	Optional	Optional	Optional
Fence line nozzles L & R	Standard	Standard	Standard
Fill system	Optional hi-flow hydraulic drive fill pump	Remote fill pump required	Optional hi-flow hydraulic drive fill pump
Chemical mixing and induction	100L standard with drop leg	60L standard with drop leg	60L standard with drop leg
Chemical induction probe with drum rinse	Optional	Optional	Optional
Envirodrum transfer system	Optional	N/A	Optional

PEGASUS 5000

PINTO 4000

PINTO 3000

W 3.46 x L 9.3 x H 4.2 (36m) 5,045kg (36m)	W 2.74 x L 7.2 x H 3.32 (21m) 3,075kg (24m)	W 2.7 x L 7.2 x H 3.3 (18m) 2,260kg (18m)
5,000L	4,000L	3,000L
Calibrated tube / Arag Visio option Dual Superflo agitation + bypass 2" drain valve 470L	Calibrated tube / Arag Visio option Dual Superflo agitation + bypass 2" drain valve 275L	Graduated tank / Arag Visio option Dual Superflo agitation + bypass 2" drain valve 275L
Rotating flushing nozzle 2" male Camlock with non-return valve and filter	Rotating flushing nozzle 2" Male camlock with non-return valve	Rotating flushing nozzle 2" Male camlock with non-return valve
2" ARAG Wolf 20L	2" ARAG Wolf 15L	2" ARAG Wolf 15L
Height adjustable with swivel eye and safety chain	Height adjustable with swivel eye and safety chain	Height adjustable with swivel eye and safety chain
Heavy-duty retractable for high clearance 2.2m (optional 3m kit) and 3m adjustable kit	Height adjustable removable type 2m fixed	Height adjustable removable type 2m fixed
Load-sensing air bag type (optional) Direct drive high capacity system with reservoir	Rubber spring N/A	Rubber spring option N/A
Full width ½ wheel type (standard)	Full width ½ wheel type (standard)	Full width ½ wheel type (standard)
Croplands branded flex type 670mm	Croplands branded flex type 580mm	Croplands branded flex type 580mm
18.4 x 38" (optional 18.4 x 42" radial)	18.4 x 30" (optional 11.2 x 42" rowcrop – 72" track) + (optional 18.4 x 38")	18.4 x 30" (optional 11.2 x 42" rowcrop – 72" track)
11,000 kg @ 25 km/h	6,500 kg @ 25 km/h	6,500 kg @ 25 km/h
AR185 LFP (optional AR250 or high flow centrifugal)	AR160 (optional AR250)	AR160 (optional AR250)
Hydraulic drive (optional) (550rpm max)	Hydraulic drive (optional) (550rpm max)	Hydraulic drive (optional) (550rpm max)
5-point filtration	4-point filtration	4-point filtration
ARAG motorised 5 section (optional 7 section)	Geoline motorised 3 section (optional 5 section)	Geoline motorised 3 section (optional 5 section)
Bravo 180S	ARAG 3 section in-cab switchbox with pressure control (optional Bravo 180S)	ARAG 3 section in-cab switchbox with pressure control (optional Bravo 180S)
Compact rotary selector-valve system	4-way ball valve selector system	4-way ball valve selector system
24–36m	18–24m	16–24m
Heavy-duty spring-loaded yaw control	N/A	N/A
Nitrogen accumulator type Direct remote (elec/hydraulic for more than 2 functions) (in-cab) Optional	Nitrogen accumulator type Direct remote (elec/hydraulic for more than 2 functions) (in-cab) Optional	Nitrogen accumulator type Direct remote (elec/hydraulic for more than 2 functions) (in-cab) Optional
Self-returning on outer wing 2,000mm parallelogram type Low-friction stainless steel boom tube Fitted to all boom tube sections Optional	Self-returning on outer wing 1,500mm parallelogram type Low-friction stainless steel boom tube Fitted to all boom tube sections N/A	Self-returning on outer wing 1,500mm parallelogram type Low-friction stainless steel boom tube Fitted to all boom tube sections N/A
AirMix 110-02 standard Optional Standard	AirMix 110-02 standard N/A Standard	AirMix 110-02 standard N/A Standard
Optional hi-flow hydraulic drive fill pump 60L standard with drop leg Optional	Remote fill pump required 60L standard with drop leg Suction only standard	Remote fill pump required 60L standard with drop leg Suction only standard
Optional	Optional	Optional



NATIONWIDE

NATIONAL SALES & SUPPORT

VANTAGE NSW

Freecall 1300 770 970
mcx-tech.com

NORTH

North West NSW
Narrabri · Moree · Inverell

Northern NSW

Tamworth · Armidale · Glen Innes

CENTRAL

Liverpool Plains
Gunnedah · Quirindi · Werris Creek

Central NSW

Dubbo · Parkes · Orange

SOUTH

South NSW


Wagga Wagga · Griffith · Albury

CORRECTION SERVICES

Nationwide

All seasons · All crops · All terrain


58 Oxley Highway, Gunnedah NSW 2380 | 1300 770 970 | mcx-tech.com

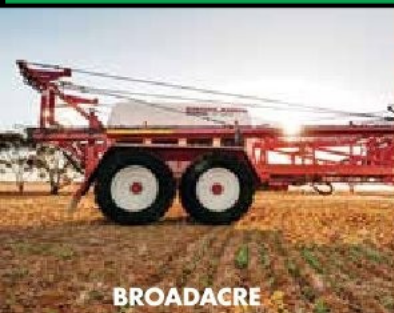

BROADACRE



SELF-PROPELLED

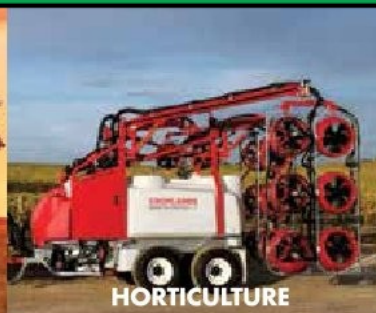

HORTICULTURE



VERDANT ROBOTICS 01

Elite Global Full Line Dealer

1300 770 970

MCX Tech



SABANTO

CROPLANDS